

HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2220T-2 XX M XX CUN T X

No. of Pins per Row: 02-40Pin
 Contact Plating: GM=Gold Flash, GS=10μ Gold, G4=5μ Gold, G5=30μ Gold
 Packing: T=Tube, P=Tube+CAP, R=Tube&Keel+CAP
 Series No. 1=Type 1, 2=Type 2

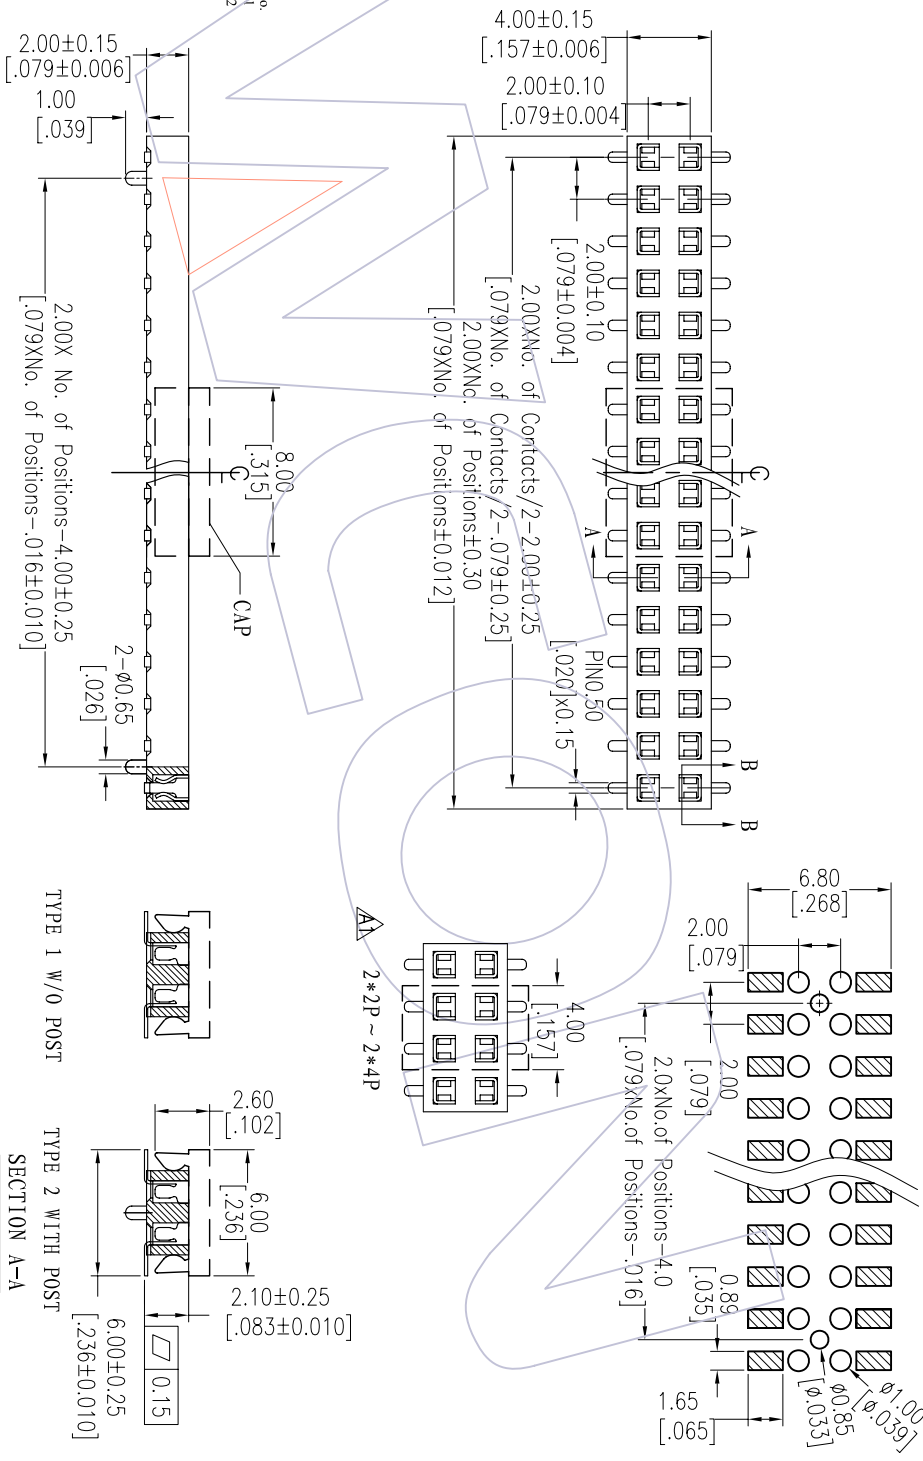

SECTION B-B

TYPE 1 W/O POST

TYPE 2 WITH POST

SECTION A-A

TITLE	PART NO.
TYPE 1	2220T-2XXMXXCUNT1
TYPE 2	2220T-2XXMXXCUNT2

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A1	2012/10/29	Modify drawing		XX	Wang	2012/10/29	mm	A4	SBE TABLE	FIG. 2. 00mm DUAL ROW 180° SMT
A0	2012/07/12	NEW		XX	CHECK		A4	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OP	DR	DATE	SCALE	FIT	PART NO.	TITLE:

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com