




NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F. UL94V-0

Ordering Information

2228-2 XX M XX CUN T X

No. of Pins per Row: 02-40Pin
 Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, SN=Tin
 Packing: T=Tube, P=Tube+CAP, R=TapeReel+CAP
 Series No.: 1=Type 1, 2=Type 2

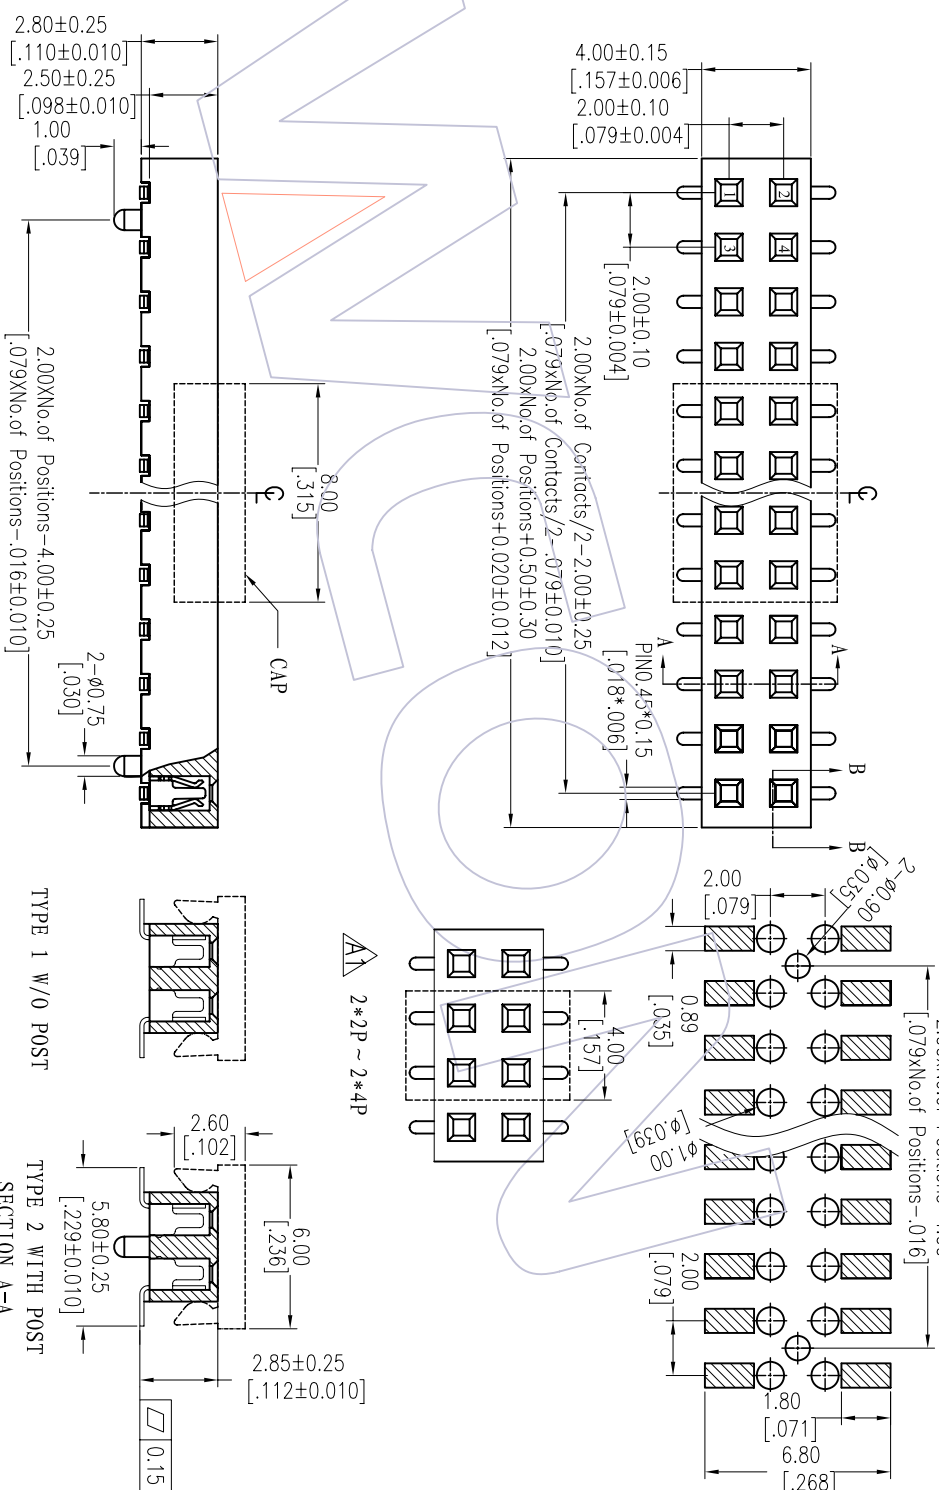

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	SHEET	TITLE:	Customer NO.
A1	2012/10/29	Modify drawing	-----	XX	Wang	2012/10/29	mm	A4	SEE TABLE	1/1	FH2.00mm Dia1 ROW 180° SMT	
A0	2012/07/12	NEW	-----	X.XXX	CHECK	DATE	SIZE	A4			H=2.8	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIW	APPROVE	DATE	PROJ.					



Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

TITLE	PART NO.
TYPE 1	2228-2XXMXXCUNT1
TYPE 2	2228-2XXMXXCUNT2