
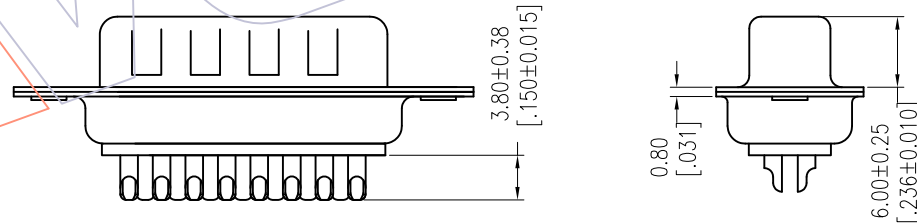


HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C

Contact Material: Brass (C3604) 车PIN端子
 Contact plating: Au over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Shell: SPCC, Sn Or Ni Plated

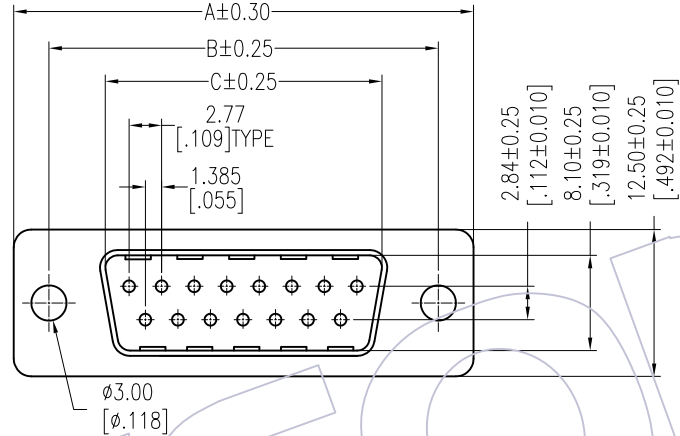

Ordering Information

6220- XX M N XX W 02

No. of Pins	Type	Contact Plating	Insulator Color
9P 15P 25P 37P	N=Without Nut	G0=Gold Flash G1=3u"Gold G2=5u"Gold G3=10u"Gold G4=15u"Gold	B:Black U:Blue W:White

PINS	DIM "A"	DIM "B"	DIM "C"
09	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

				OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
				x.x ±0.40		Allen		2014/06/06		UNIT		mm		6220-XXMNXXX02	
				x.xx ±0.25		CHECK		DATE		SIZE		A4		TITLE:	
				x.xxx ±0.15		APPROVE		DATE		SHEET		1/1		D-SUB MALE DUAL ROW SOLDER TYPE	
AO	2014/06/06	NEW		-----		Angle ± 3'				PROJ.		⌀		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		DIM TOL									

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--