

# HSF

**NOTES:**

Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C





Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information

2228 - 2 XX S XX CUNT 1

No. of Pins per Row: 02-40PIN  
 Contact Plating: G0=Gold Flush  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 SN=Tin  
 Packing: T=Tube  
 P=Tube+CAP

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

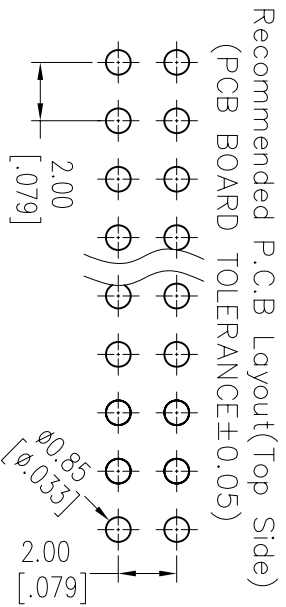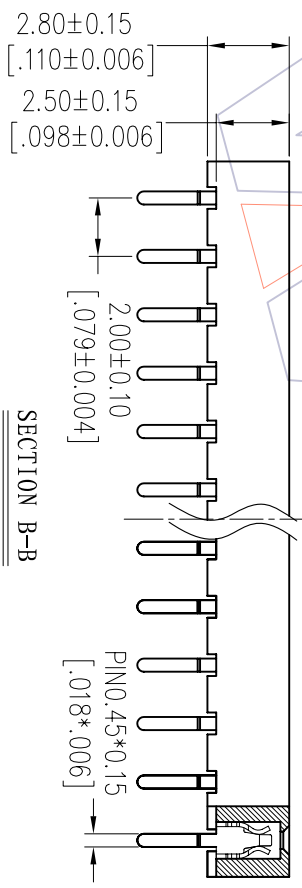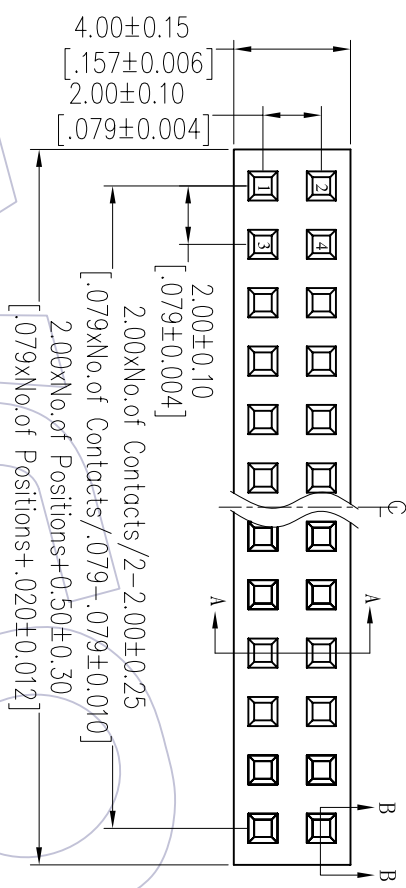

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan	
A0	2012/07/16	NEW		X.XXX	± 3'	CHECK	2012/07/16	mm	A4	2228-2XXSXXCUNT1	FH2.00mm Dual Row 180° DIP H=2.8	Http: www.wcon.com	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

# WCON