

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information


2235 - 2 XX C XX C U N X X

No. of Pins per ROW: 02-40PIN
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Cold
 G4=15μ"Cold
 G5=30μ"Cold
 S0=Cold Flash/Tin
 S3=10μ"Cold/Tin
 S4=15μ"Cold/Tin
 S5=30μ"Cold/Tin
 SN=Tin
 SW=Matte Tin

Packing:
 T=Tube
 P=Tube+CAP

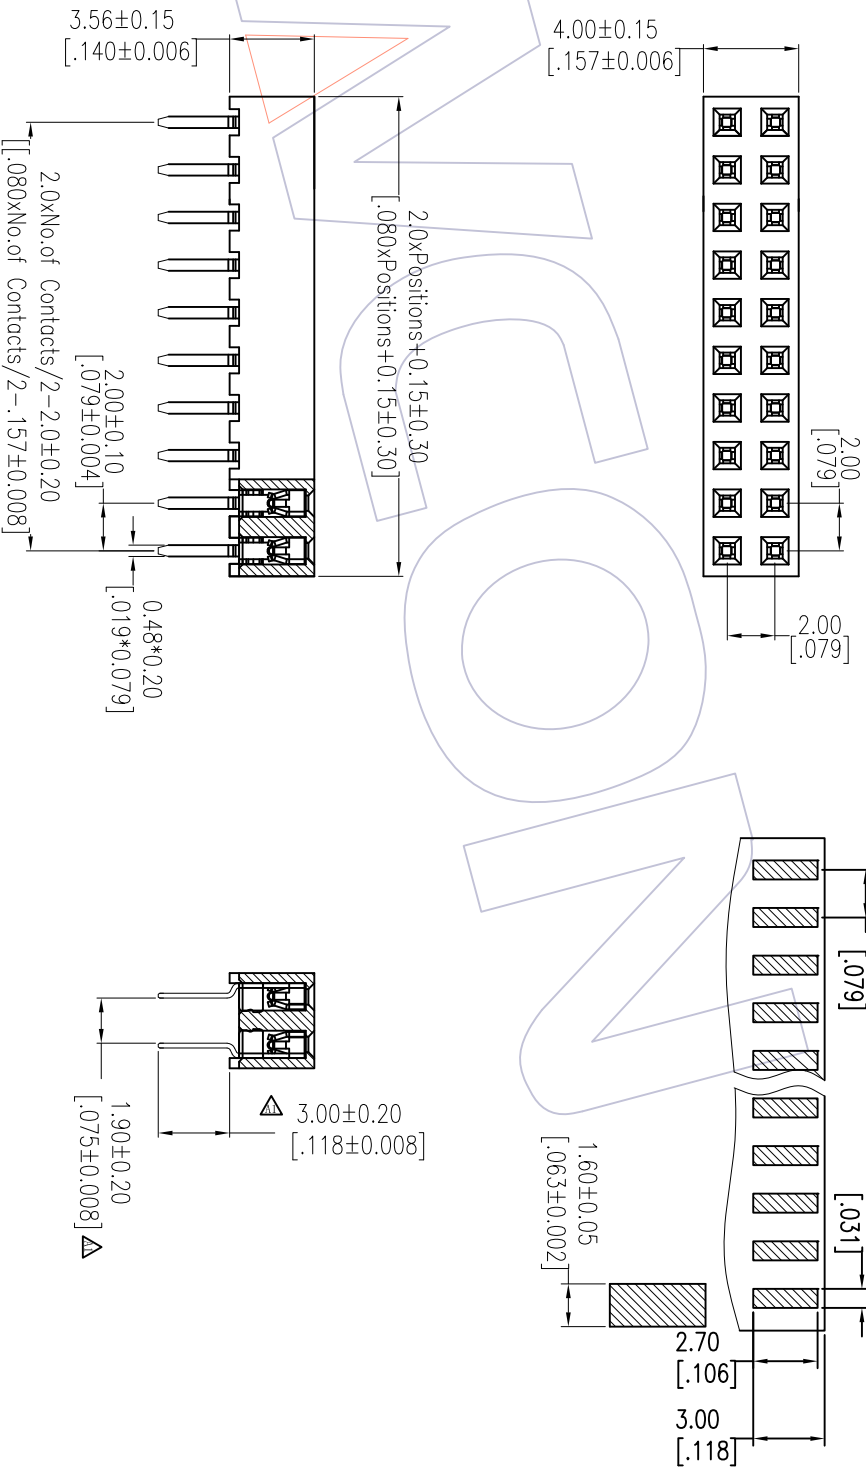

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

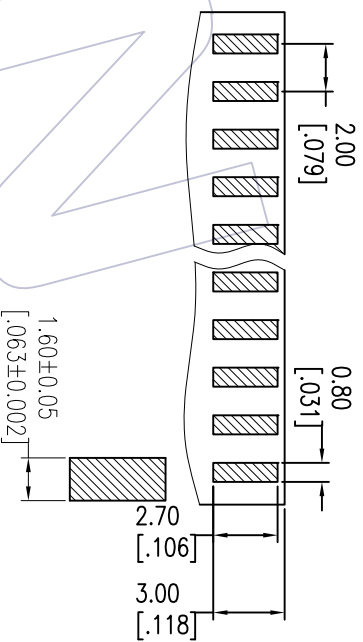

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2016/08/01	MODIFY DRAWING	----	X.X	JYHuang	2016/08/04	mm	A4	2235-2XXCXXCUNXX	FH2: 0mm DUAL ROW 180° CLAMP H=3.56 W=4.0	Http: www.wcon.com	
A0	2016/01/04	NEW	----	X.XXX	CHECK	DATE	SIZE	1/1				
			----	Angle	APPROVE	DATE	SHEET					
			----	± 3'			PROJ.					
				DIM	TOL				Customer NO.			

WCON

Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com