

HSF

NOTES:
 Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0

Ordering Information






2521-1 XX Z XX CUN X X


No. of Pins per Row: 02-40Pin
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 SN=Tin

Packing:
 T=Tube
 R=Tape&Reel

Series No.

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

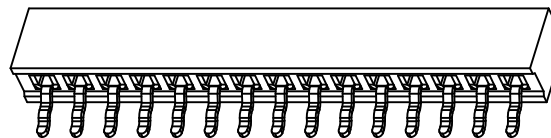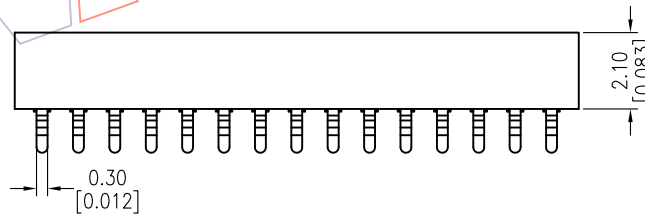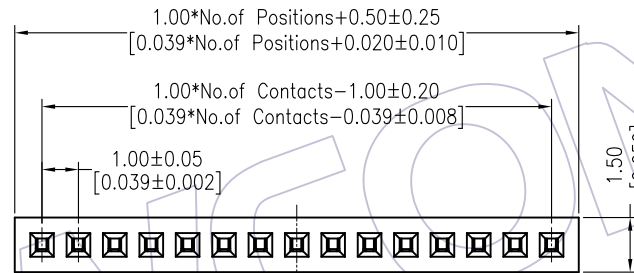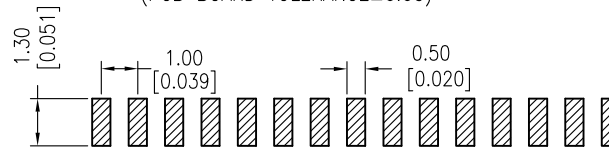

| | | | | | | | | | | | |
|-----|------|--------------------------|-----------|-------|---------|------------|-------|------|---|--|---|
| | | | OPERATION | | DRAW | DATE | SCALE | FIT | PART NO. | |  Http: www.wcon.com |
| | | | X.X | ±0.40 | Allen | 2014/12/25 | UNIT | mm | 2521-1XXZXXCUNXX | | |
| | | | X.XX | ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: | | WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 E-mail: sales@wcon.com |
| | | | X.XXX | ±0.15 | APPROVE | DATE | SHEET | 1/1 | 1.00mm Female Header Single Row 90° SMT Type | | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM | TOL | APPROVE | DATE | PROJ | Customer NO. | | |