

HSF

NOTES:

- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%GF UL94V-0

Ordering Information




2240 - 1 XX S XX CUNT 1

No. of Pins per Row: 12-40PIN

- Contact Plating: G0=Gold Flash
- G3=10μ"Gold
- G4=15μ"Gold
- G5=30μ"Gold
- S0=Gold Flash/Tin
- S3=10μ"Gold/Tin
- S4=15μ"Gold/Tin
- S5=30μ"Gold/Tin
- SN=Tin
- SM=Matte Tin

Packing: T=Tube

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

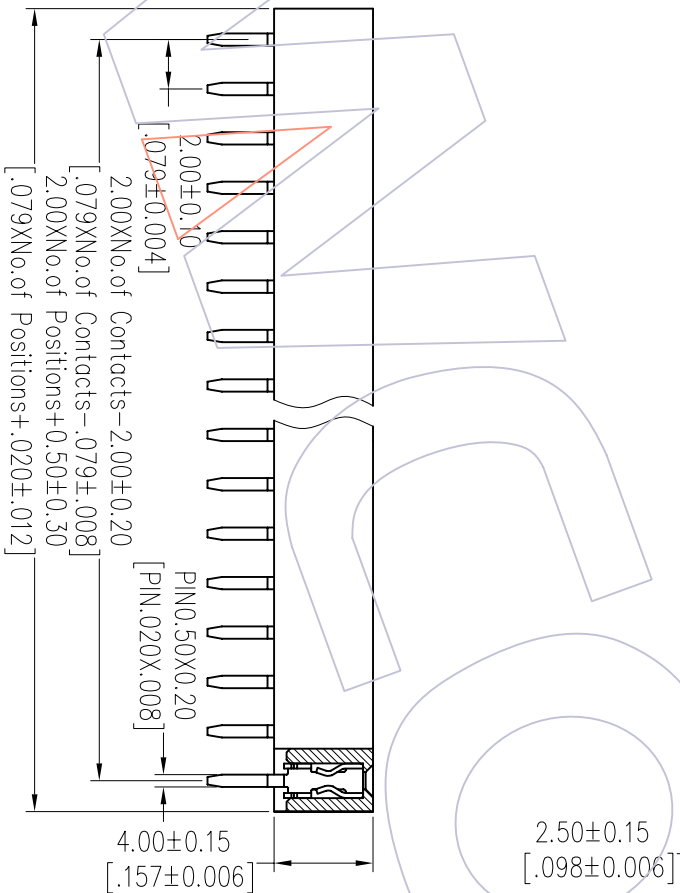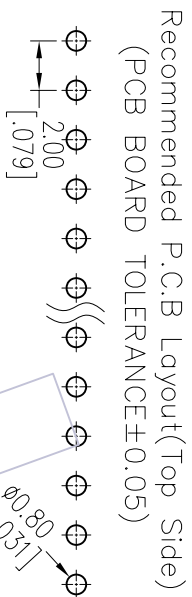

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: FH2.00mm SINGLE ROW 180° DIP H=4.0	Customer NO.
A0	2012/07/12	NEW	---	XX	JYHuang	2012/07/12	mm	A4	2240-1XXSXXCUNT1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	CHECK	DATE	SIZE	SHEET	APPROVE	DATE	PROJ.
				± 3'			A4	1/1			

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com