HSF

TECHNICAL SPECS:
Current Rating:1.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength: Min 1000VRMS
Mechanical Life: Min 500 cycles
Operation Temperature:−40°C to +105°C

Sleeve:Brass CuZn36Pb3(C36000)
Contact plating:Au over Ni
Connecting Pin:ø0.41mm
Insulator Material:PPS+30%G.F(UL94V−0)

Ordering Information

3514-192 XX S XX 081 X 1

- No. of Pin: 2~50PIN
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	1.27	3524
Alternate		

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

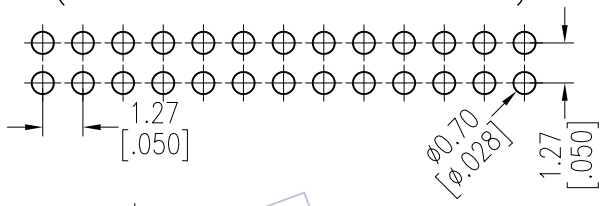

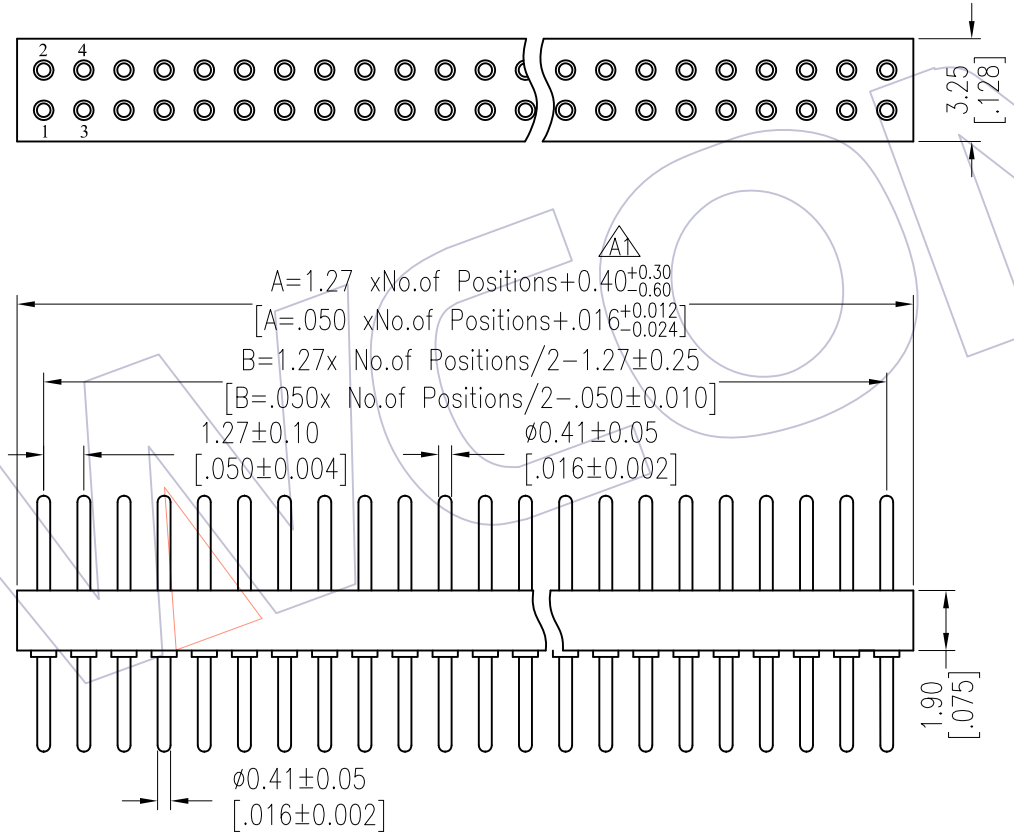

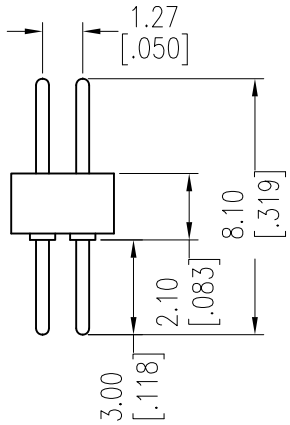

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/05/21	modify drawing	------
A0	2012/10/18	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW Wang	DATE 2013/05/21	SCALE	FIT
CHECK	DATE	UNIT	mm
APPROVE	DATE	SIZE	A4
		SHEET	1/1
		PROJ.	

PART NO. 3514-192XXSXX081X1

TITLE: 1.27mm MACHINED PIN HEADER DUAL ROW 180° H=1.90 L=8.1

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com

WCON