

# HSPF

## TECHNICAL SPECS:

Current Rating: 1.0AMP  
 Contact Resistance: 10mΩ Max  
 Dielectric Strength: Min 1000V/RMS  
 Mechanical Life: Min 500 cycles  
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C360000)  
 Contact plating: Au over Ni  
 Connecting Pin: Ø0.41mm  
 Insulator Material: PPS+30%G.F.(UL94V-0)


## Ordering Information

3514-193 XXX R XX 103 X 1

No. of Pin  
2-50PIN

Contact Plating  
G0=Gold Flash  
G3=10u"Gold  
G4=15u"Gold  
G5=30u"Gold

Packing  
A=Tray  
T=Tube

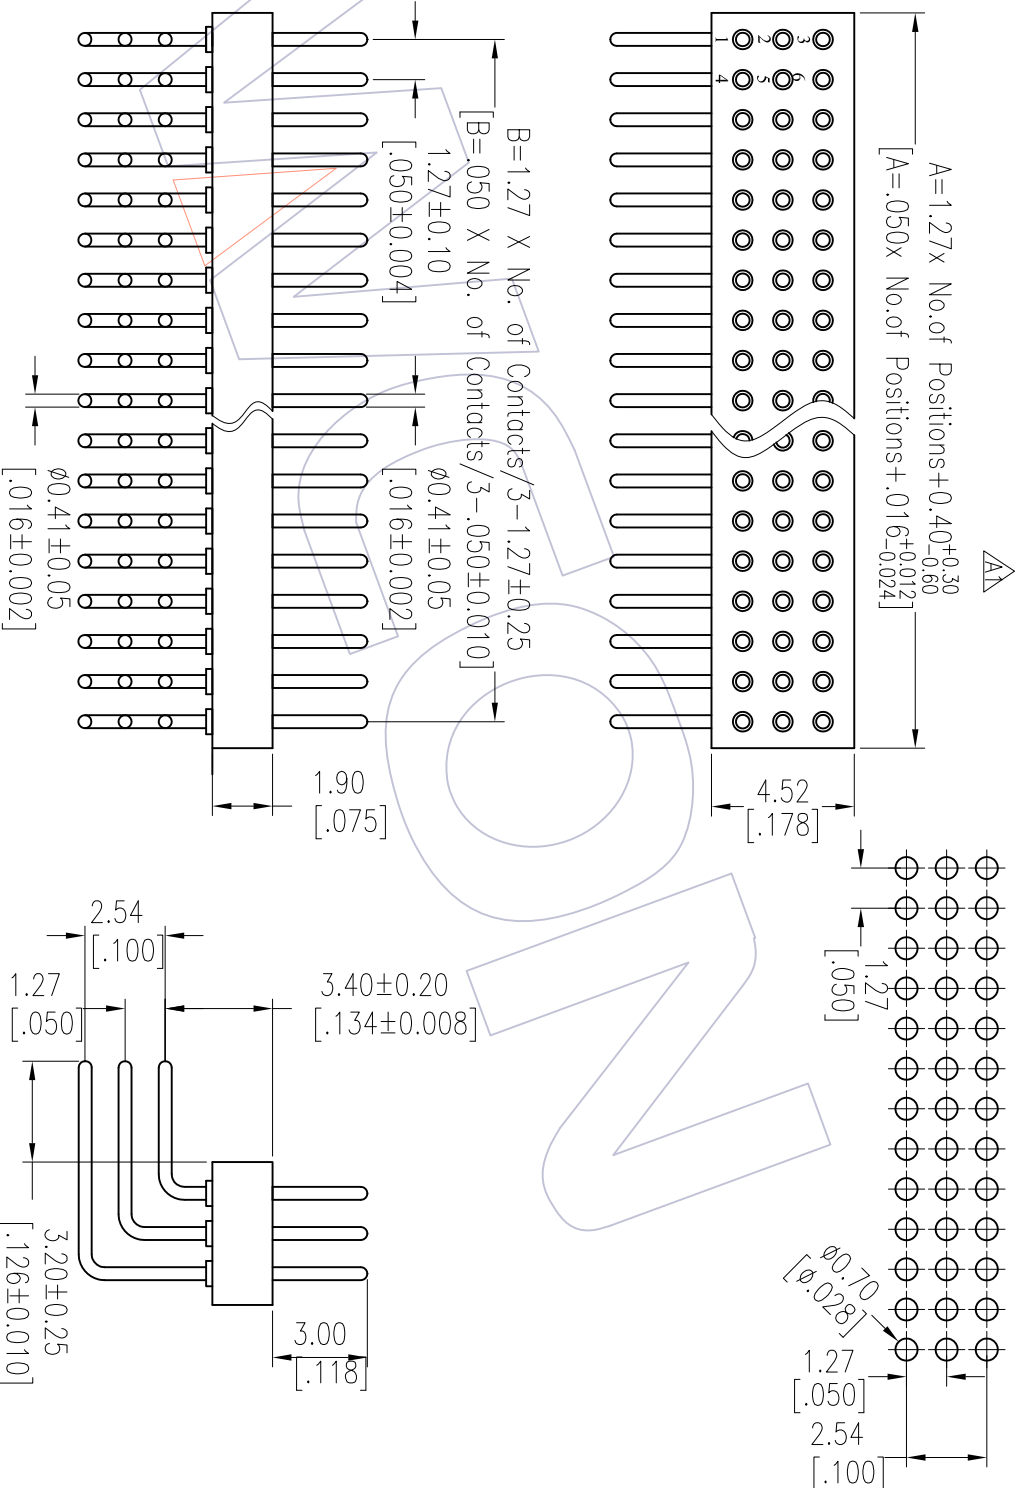

Item	Pitch	Mating
Standard	1.27	3524
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A1	2013/05/21	modify drawing
A0	2012/10/18	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X	wang	2013/05/21	UNIT	mm	3514-193XXXRX103X1
X.XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.15		SHEET	1/1	1.27mm MACHINED PIN HEADER THREE ROW 90° H=1.90 L=10.3
Angle	± 3'	APPROVE	PROJ.		Customer NO.
DM	TOL				

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: [sales@wcon.com](mailto:sales@wcon.com)

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: [sales@wcon.com](mailto:sales@wcon.com)