

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C





Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2135T - 2 XX S XX X Y N T 1

No. of Pins per ROW: 02-40PIN
 Contact Plating: G=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
 Insulator: A=PBT, C=PA9T
 Packing: T=Tube
 S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin, SM=Mate Tin

Item	Pitch	Mcting
Standard	2.54	1115/1120/1125
Alternate		

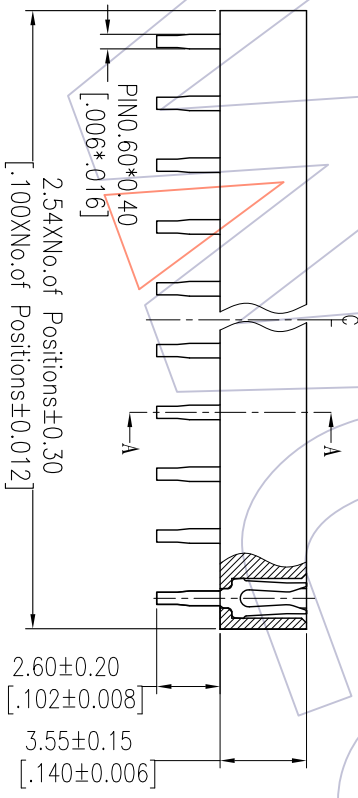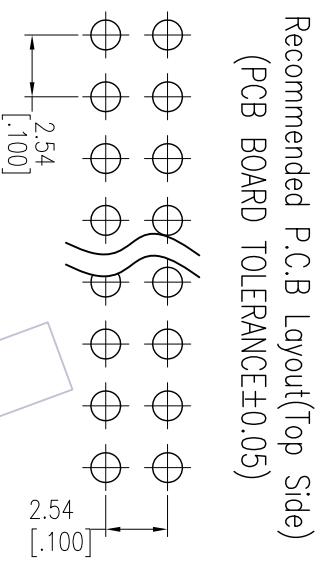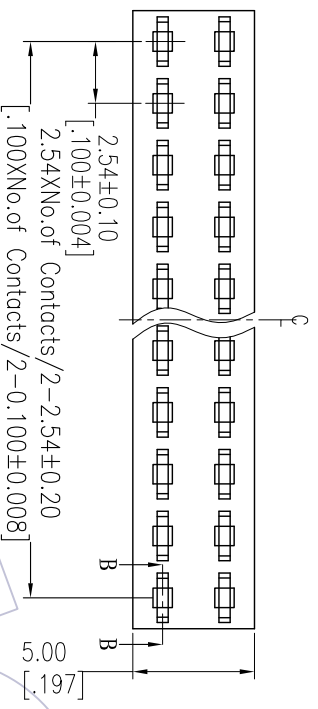

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X	JYHuang	2012/08/02	mm	A4	2135T-2XXXXXXYYNT1
X.XX	CHECK	DATE	UNIT	SIZE	TITLE:
X.XXX	±0.15		A4	1/1	FHD. 54 DUAL ROW 180° DIP H-3.5
Angle	± 3'	APPROVE	SHEET	PROJ.	Customer NO.
DM	TOL	DATE	1/1		
CHANGE					
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/08/02	NEW			
1					

WCON

Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com