

HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: Ø0.41mm


Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information

3514-221 XX R XX 103 X 1

No. of Pin
2-50PIN
Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Packing
A=Tray
T=Tube

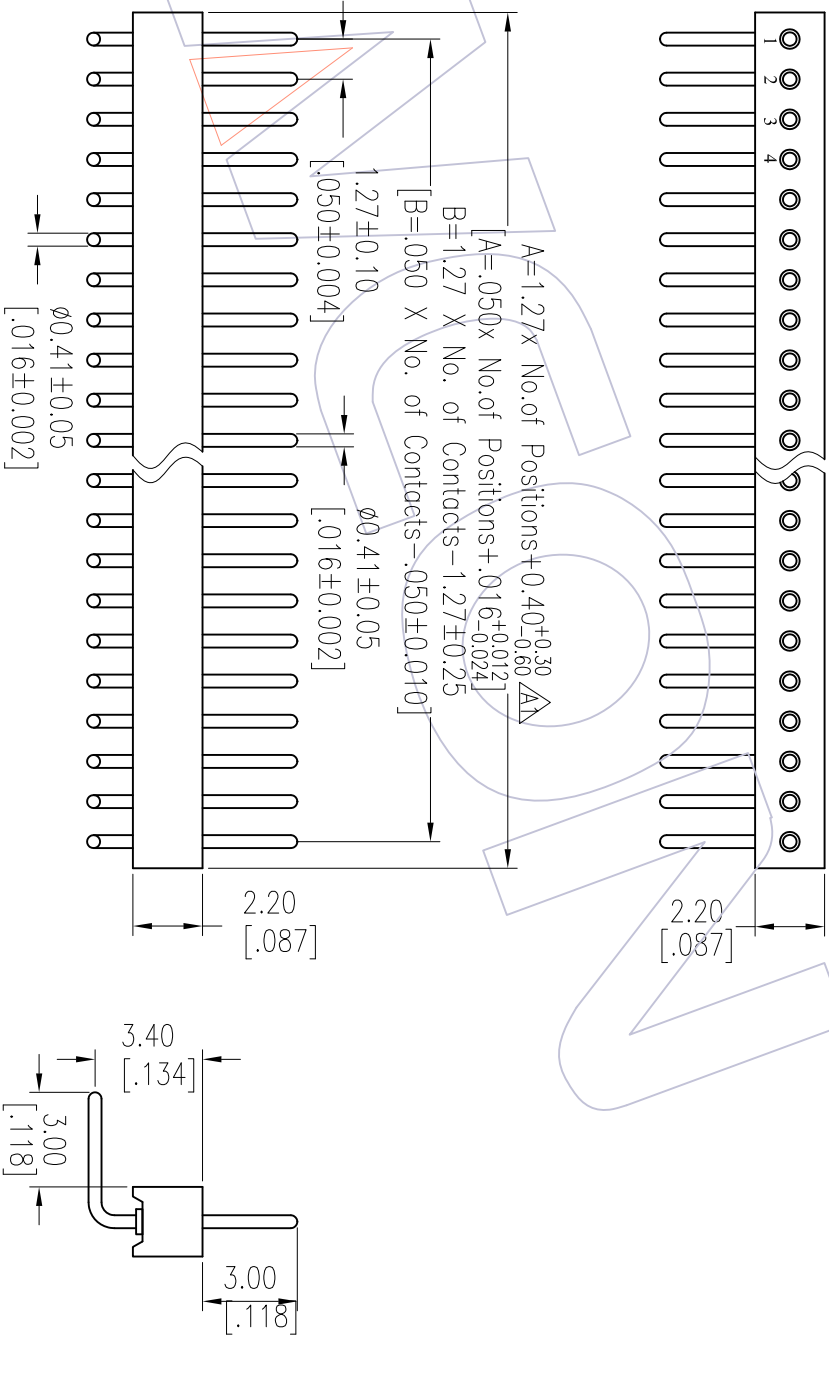

Item	Pitch	Mating
Standard	1.27	3524
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2013/05/21	modify drawing	-----	X.X	Wang	2013/05/21	UNIT	mm	3514-221XXXXX103X1	1.27mm MACHINED PIN HEADER SINGLE ROW 90° H=2.20 L=10.3	Http: www.wcon.com	
A0	2012/10/22	NEW	-----	X.XXX	CHECK	DATE	SIZE	A4				
			-----	Angle	APPROVE	DATE	SHEET	1/1	Customer NO.			
			-----	DM	TOL		PROJ.					

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com