


# HSP

**NOTES:**

- Rated Current:3.0AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:1000V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +125℃
- Contact Material:Brass
- Contact Plating:Au or Sn Over Ni
- Insulator Material:LCF+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

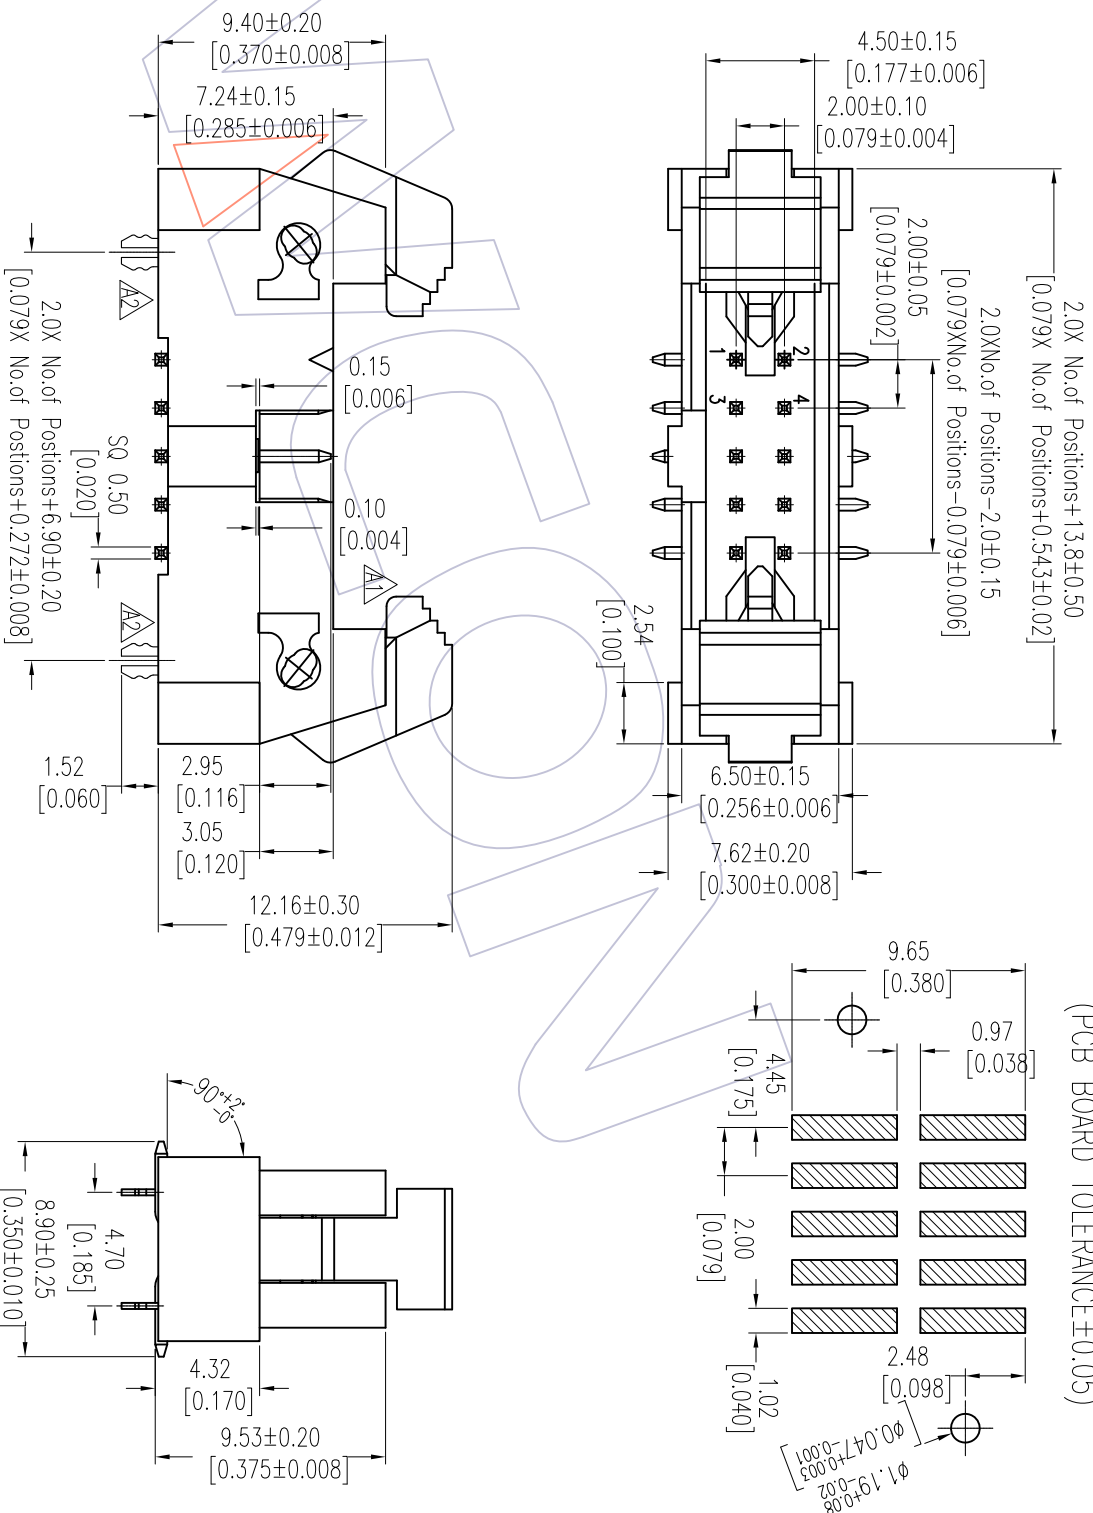

## Ordering Information

3221-XX M XX B S T 2

- No. of Pins
- Contact Plating
- Insulator Color
- Packing
- G=Gold Flash
- B=Black
- A=Tray
- 08 34 G=10u"Gold
- U=Blue
- T=Tube
- 10 40 G=15u"Gold
- G=Grey(427C)
- 14 44 G=30u"Gold
- E=Grey(413C)
- 16 50 S0=Gold Flash/Tin
- 20 60 S3=10u"Gold/Tin
- 24 64 S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A2	2012/05/30	Modify Drawing	XX	±0.40	TsingSn	2012/05/30	mm	A4	3221-XXMXXBST2	2.00 Ejector Header	Tel: +86 769 85358920	Tel: +86 512 57468408
A1	2011/06/25	Modify Drawing	XXX	±0.25	CHECK	DATE	inch	A4	"S" Type SMT With fork		Fax: +86 769 85358915	Fax: +86 512 57468468
A0	2009/05/05	NEW	XXXX	±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.		E-mail: sales@wcon.com	E-mail: sales@wcon.com



WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sales@wcon.com

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: sales@wcon.com