

HSP


NOTES:

- Rated Current:18.0 AMP
- Contact Resistance:8.0 milliohm Max
- Withstand Voltage:2000 V AC/DC
- Insulation Resistance:1000 Megohm min
- Operation Temperature:-40°C to +105°C
- Housing Material:PA66+30%GF(UL94V-0)
- Contact Material:Brass
- Terminal Plating:
Matte Tin Plated Over Nickel


Ordering Information:

P M 750- 1 R XX A SM 2


M=Male
Pitch 750=7.50
No. of Pins 02-20P
Color A=Green SM=Matte Tin
Contact Plated Series No.

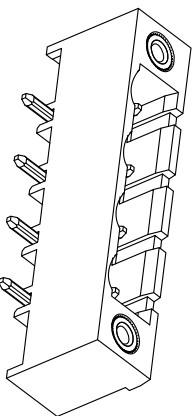

3D VIEW(REF.)
SCALE 1:2

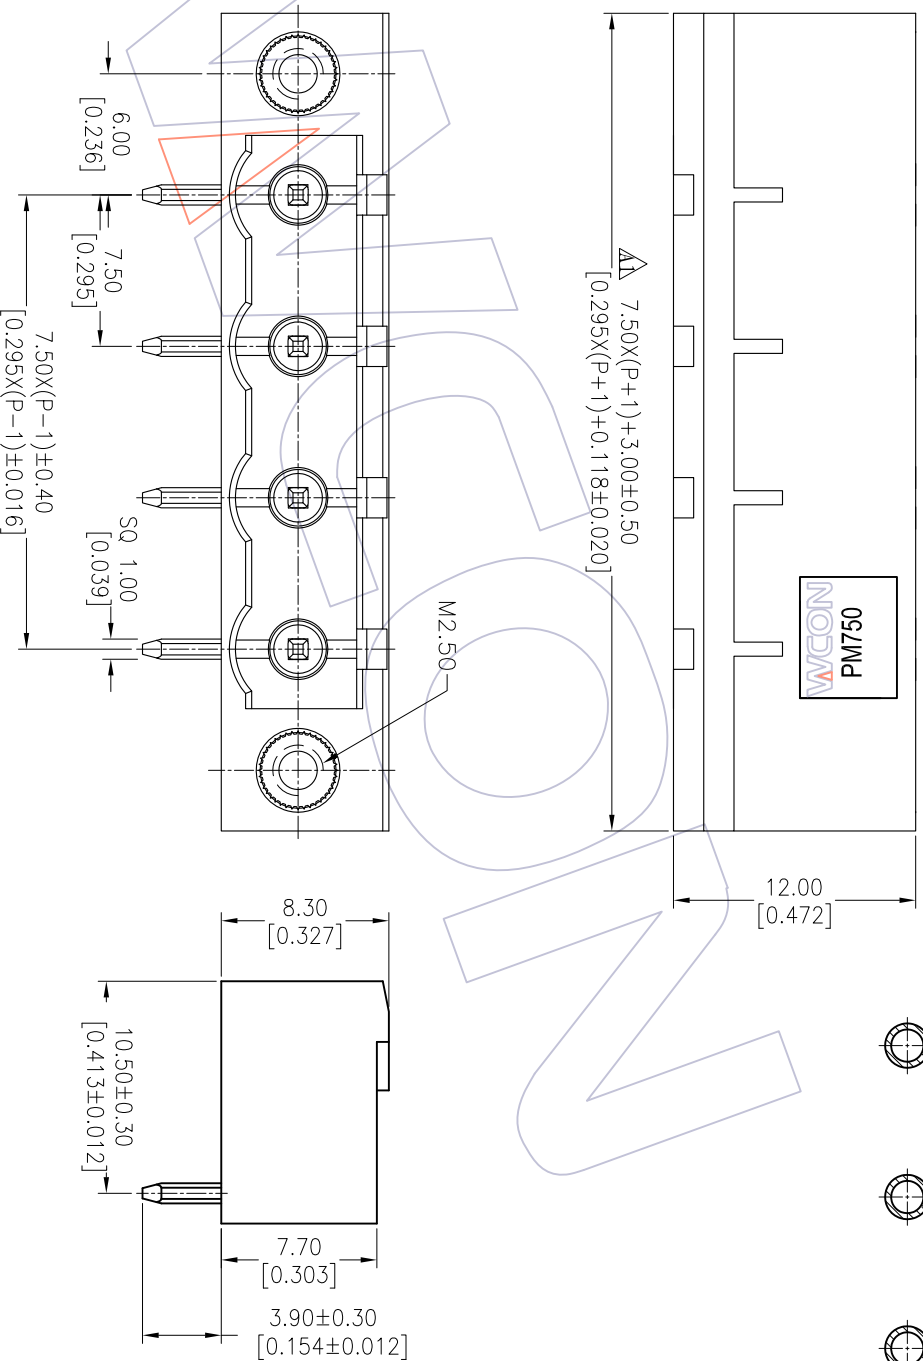

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2014/04/15	Modify	△	XX ±0.40	Allen	2014/04/15	mm	A4	PM750-1RXXASM2	7.50mm Pitch Male Pluggable Terminal Blocks	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2013/11/06	NEW	—	XXX ±0.25	CHECK		inch	A4				
				XXXX ±0.15	APPROVE			1/1				
				Angle ± 3'					Customer NO.			
				DIM TOL								

WCON
Http: www.wcon.com