



HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: LCP+30%GF UL94V-0

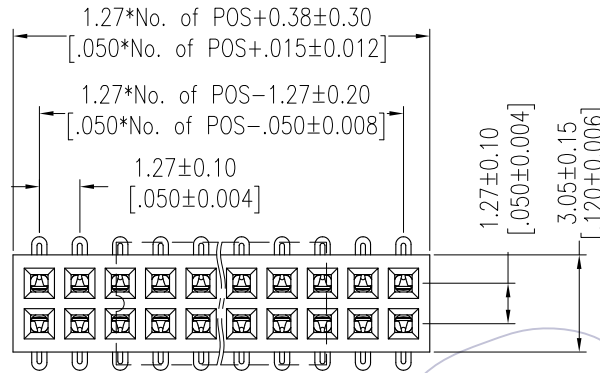

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

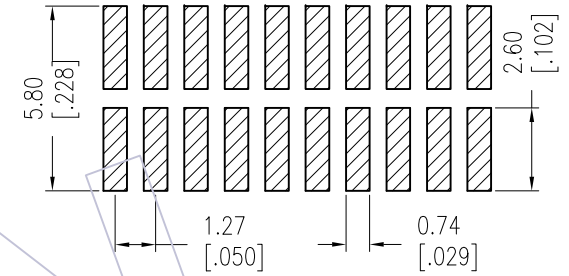



Ordering Information

2345- 2 XX M XX DUN X X

No. of Pins
Per Row
02-50Pin


Contact Plating
 G0=Gold Flash
 G1=3U" Gold
 G2=5U" Gold
 G3=10U" Gold

Package
 T=Tube
 P=Tube+Cap
 R=Tape&Reel+Cap

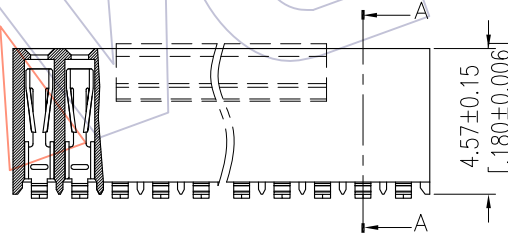

□	0.12	02~26P
□	0.15	27~50P

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com
				x.x ±0.40	Allen	2015/07/28	UNIT	mm	2345-2XXMXXDUNXX	
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27 Female Header, SMT H=4.57, W=3.05	
AO	2015/07/28	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	
				Angle ± 3'			PROJ.	⌀		
				DIM TOL						