

HSF

HOUSING MATERIAL

Insulation Material: PBT+30%GF(UL94V-0)
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni

SPECIFICATIONS





Insulation Resistance: 5MΩ Min
 Contact Resistance: 1.0Ω Max
 Withstand Voltage: DC 300V , 10S
 The Cable Assembly Must 100% Test

CABLE MATERIAL

Insulation: UL 2678, Grey, Red Side
 Conductor: 30AWG(7/0.102mm)
 Electrical: 300V

Ordering Information

FB32 - XX XX F A B XXX - 01

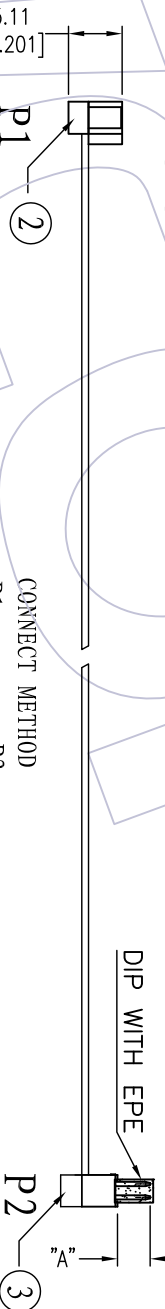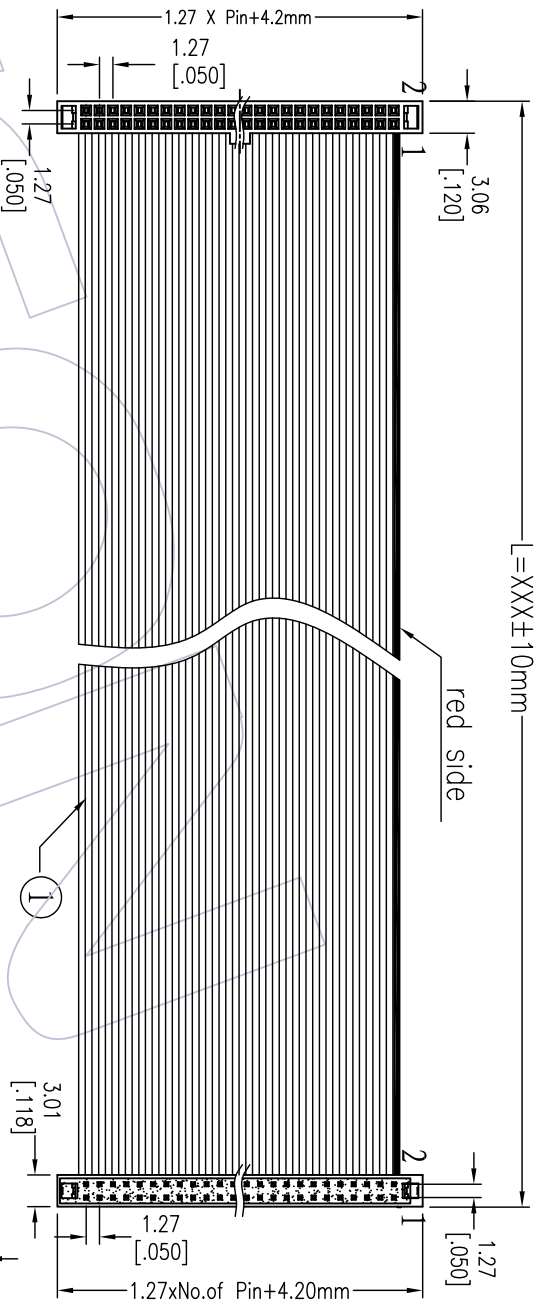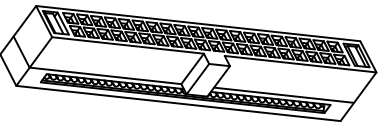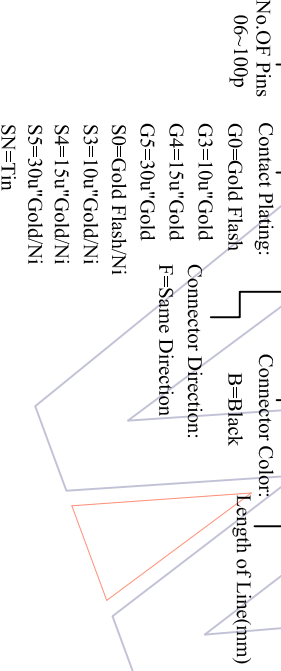

CONNECT METHOD
 P1 _____ P2 _____
 1 _____ 1 _____
 2 _____ 2 _____
 3 _____ 3 _____

XX _____ XX _____
 XX _____ XX _____

PART NO.	DIM" A"
5330-XXPXB01	1.90
5330-XXPXB02	3.10

NO.	PART NO.	NAME	CONN.	CONN.	WIRE	UNIT	QTY	UNIT
③	5330-XXPXB02	CONN.	1.27 DIP **P	PBT Black Phosphor Bronze Plating	Xu" gold	1	SET	
②	5232-XXUPXWB01	CONN.	1.27 IDC **P	PBT Black With Bump Phosphor Bronze Plating	Xu" gold	1	SET	
①	FSU-A30GXXD0-XXXX-1	WIRE	UL2678	PH0.635mm	XXP 30AWG(7/0.102TC) PVC Grey Marking	Red Side	XXXX	MM

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE
XX	Wong	2012/07/19	mm/inch	A4	FB32-XXXXFABXXX-01	1.27 IDC T0 1.27 DIP
X.XXX	CHECK	DATE	SIZE	A4		Customer NO.
X.XXX	APPROVE	DATE	SHEET	1/1		
Angle			PROJ.			
± 3'						
DIM						
TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	12/07/19	Modify drawing	
A0	09/06/25	NEW	



WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

1 2 3 4 5 6 7 8 9 10