

HSF

NOTES:


Voltage Rating: 50V AC/DC
 Current Raing: 0.5AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/Minute
 Insulation Resistance: 500MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: 100~200u"Matte Tin Plated Over
 50~100u" Nickel
 Insulator Material: PA9T+33%GF UL94V-0 BLACK

Ordering Information

3652- P XXX - XXX XX R0X

No.of Pins	Height of Housing	Plating	Packing
004: 04 Pin	039: 3.95	G0=Gold Flash	R=Tape&Reel
005: 05 Pin	059: 5.95	G3=10u"Gold	
006: 06 Pin		G4=15u"Gold	
007: 07 Pin		G5=30u"Gold	
008: 08 Pin		SM=Matte Tin	
010: 10 Pin			
017: 17 Pin			
020: 20 Pin			

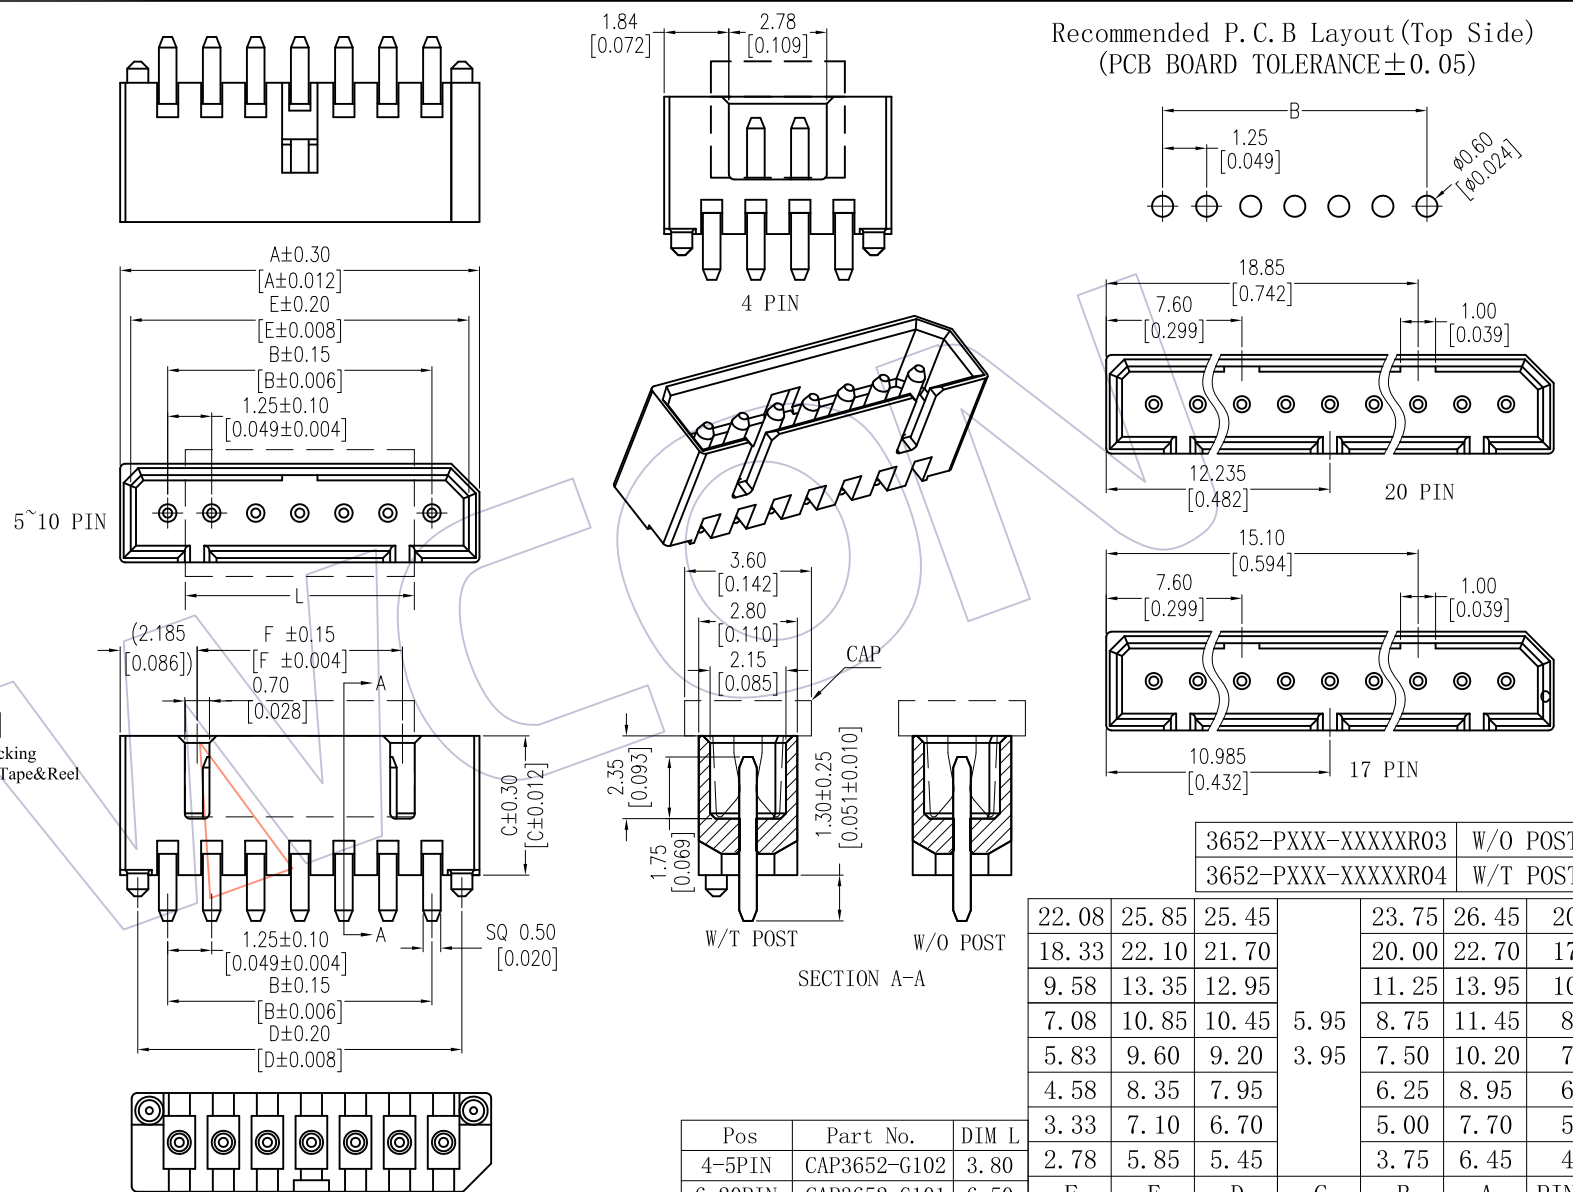

3652-PXXX-XXXXXR03			W/O POST			
3652-PXXX-XXXXXR04			W/T POST			
22.08	25.85	25.45	5.95	23.75	26.45	20
18.33	22.10	21.70		20.00	22.70	17
9.58	13.35	12.95	3.95	11.25	13.95	10
7.08	10.85	10.45		8.75	11.45	8
5.83	9.60	9.20	3.95	7.50	10.20	7
4.58	8.35	7.95		6.25	8.95	6
3.33	7.10	6.70	3.95	5.00	7.70	5
2.78	5.85	5.45		3.75	6.45	4

Pos	Part No.	DIM L
4-5PIN	CAP3652-G102	3.80
6-20PIN	CAP3652-G101	6.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A0	2016. 10. 25	NEW	---	X.X ±0.40	DingWenMin	2016. 10. 25	UNIT	mm	3652-PXXX-XXXXXR0X		
			---	X.XX ±0.25	CHECK	DATE	SIZE	A4	1. 25mm BTB MALE , 180° DIP TYPE	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
			---	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1			
			---	Angle ± 3'			PROJ.				
				DIM TOL							