

HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 3.0AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ
- Operation Temperature: -55°C~+105 °C

- Contact Material: Brass
- Contact Plating: Au and Sn over Ni
- Fixing Material: Phosphor Bronze
- Fixing Plating: Sn over Ni
- Insulator Material: PBT+30% G.F(UL94V-0)

Ordering Information

3410-2 XX X MR SX X A X

- No. of Pins Per Row: 10pin, 16pin, 32pin
- Rows with Contacts: B=q+b, D=a
- Contact Plating: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Packing: A=Tray
- DIP Length: 1: L=2.50, 2: L=3.00, 3: L=4.00, 4: L=4.57
- W=With Lock, N=Without Lock

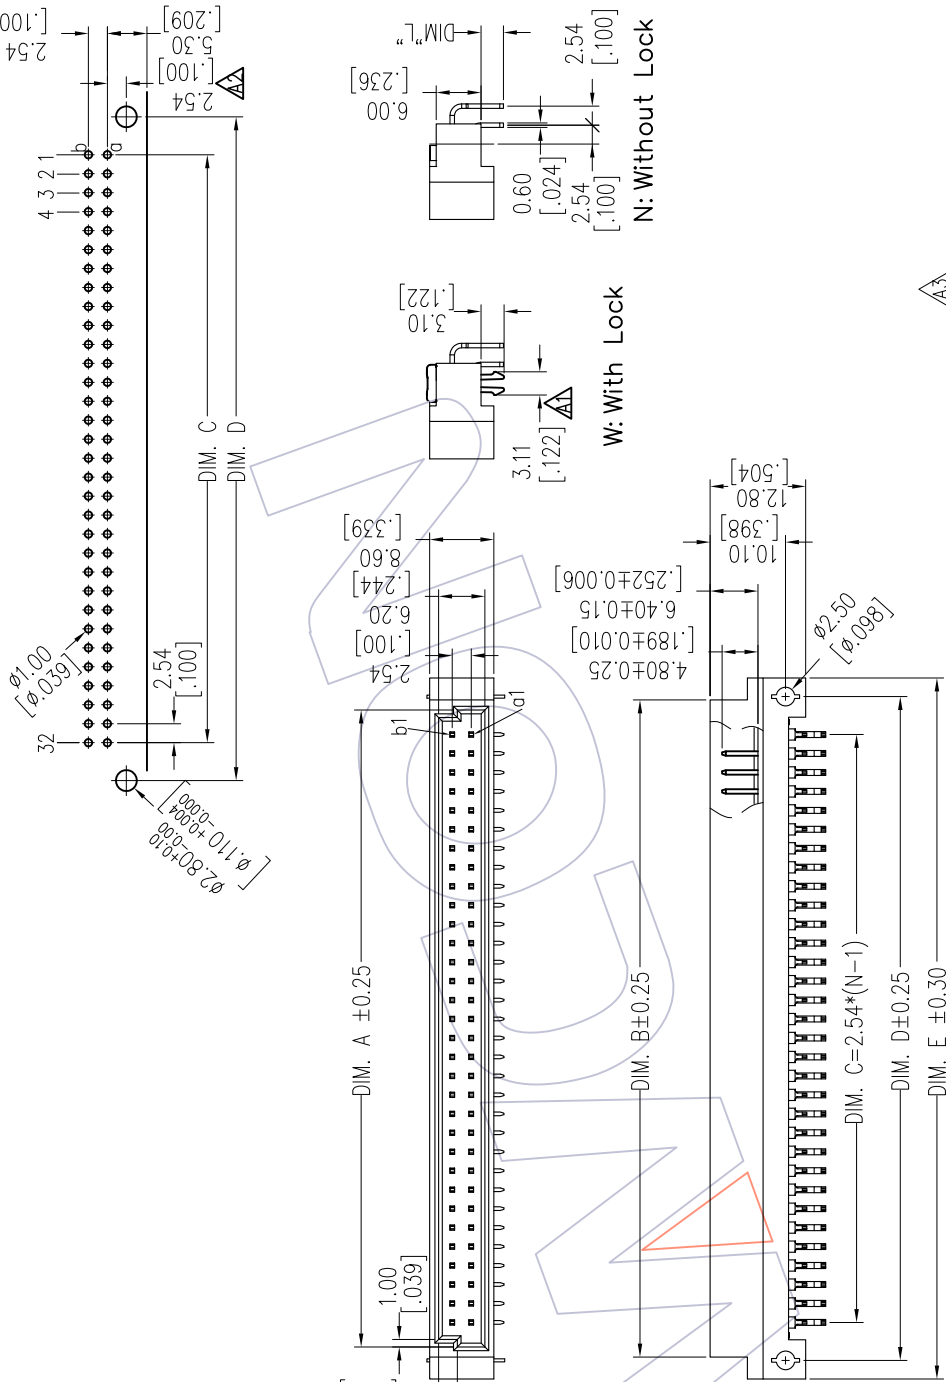

B	64	2	32	85.20	88.00	78.74	88.90	94.00
B/2	32	2	16	44.60	47.36	38.10	48.26	53.90
B/3	20	2	10	29.30	32.10	22.86	33.02	38.10
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2016/09/19	Changes in size and in kind	—	X-X ±0.40	Ding Wen Min	2016/09/19	UNIT	FORM	3410-2XXXXMRSXXXAX
A2	2015/06/04	Modify the P.C.B Layout	—	X-XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54PITCH DIN 41612 Male 90°DIP(B-Type)
A1	2014/08/12	Modify the dim	—	X-XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
A0	2014/05/29	NEW	—	Angle ± 3°		DATE	PROJ.		

WCON
Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
Tel: +86 769 85358920 Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: sales@wcon.com