



NOTES:


- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

# Ordering Information

3220 - XX M XX B X X 1

- No. of Pins
- Contact Plating
- Insulator Color
- Latch type
- Packaging
- 08 30 G=Gold Flash B=Black L=Long Latch T=Tube
- 10 34 G3=10u"Gold U=Blue S=Short Latch P=Tube+Cap
- 14 40 G4=15u"Gold G=Grey(427C)
- 16 44 G5=30u"Gold E=Grey(413C)
- 20 50 S0=Gold Flash/Tin
- 24 60 S3=10u"Gold/Tin
- 26 64 S4=15u"Gold/Tin
- 68 S5=30u"Gold/Tin
- SN=Tin

Item	Pitch	Mating
Standard	2.00	5222
Alternate		

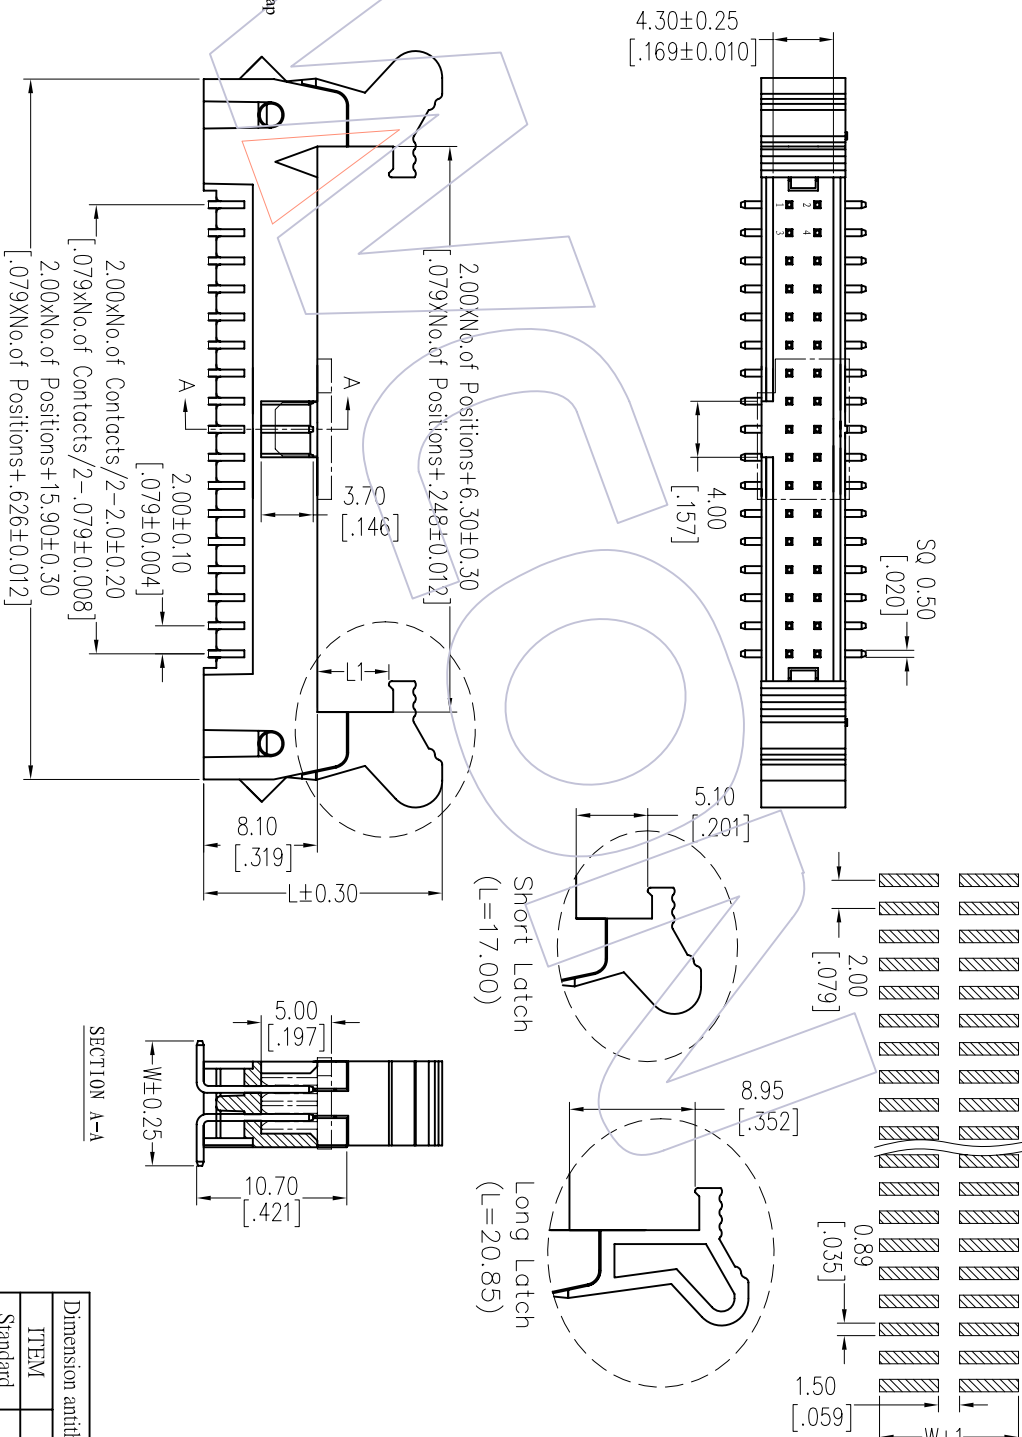

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	W
Standard	8.90
Alternate	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/05	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
XX	JYHuog	2012/10/05	±0.40	mm
XX	CHECK	DATE	±0.25	A4
Angle	APPROVE	DATE	± 3'	SHEET 1/1
DIW	TOL	PROJ.		

PART NO.	3220-XXMXXBXX1
TITLE:	2.00 EJECTOR HEADER SMT
Customer NO.	

**WCON**

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com