



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 5.0AMP
- Contact Resistance: 25mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 5000MΩ Min
- Operation Temperature: -55°C to +105°C

- Contact Material:Brass
- Contact plating:Au Or Sn over Ni
- Insulator Material:PBT+30%G.F UL94V-0
- Shell Material:Spcc,Plating: Ni Plated
- Rivet/Harpoon:Brass,Sn over Ni
- Screw:Brass,Plating Ni Plated

Ordering Information

6202-X 09MX 15F X XX X X

- Dim of Dual Port Center A=15.88mm
- Center B=9.05mm
- Up Port Color
- B=Black
- U=Blue
- N=Green
- Down Port Color
- S3=10u'Gold/Tin
- S4=15u'Gold/Tin
- S5=30u'Gold/Tin
- SN=Tin
- Contact Plating:
- S0=Gold Flash/Tin
- S1=10u'Gold/Tin
- S2=15u'Gold/Tin
- S3=30u'Gold/Tin
- Bracket Material
- I=SPCC

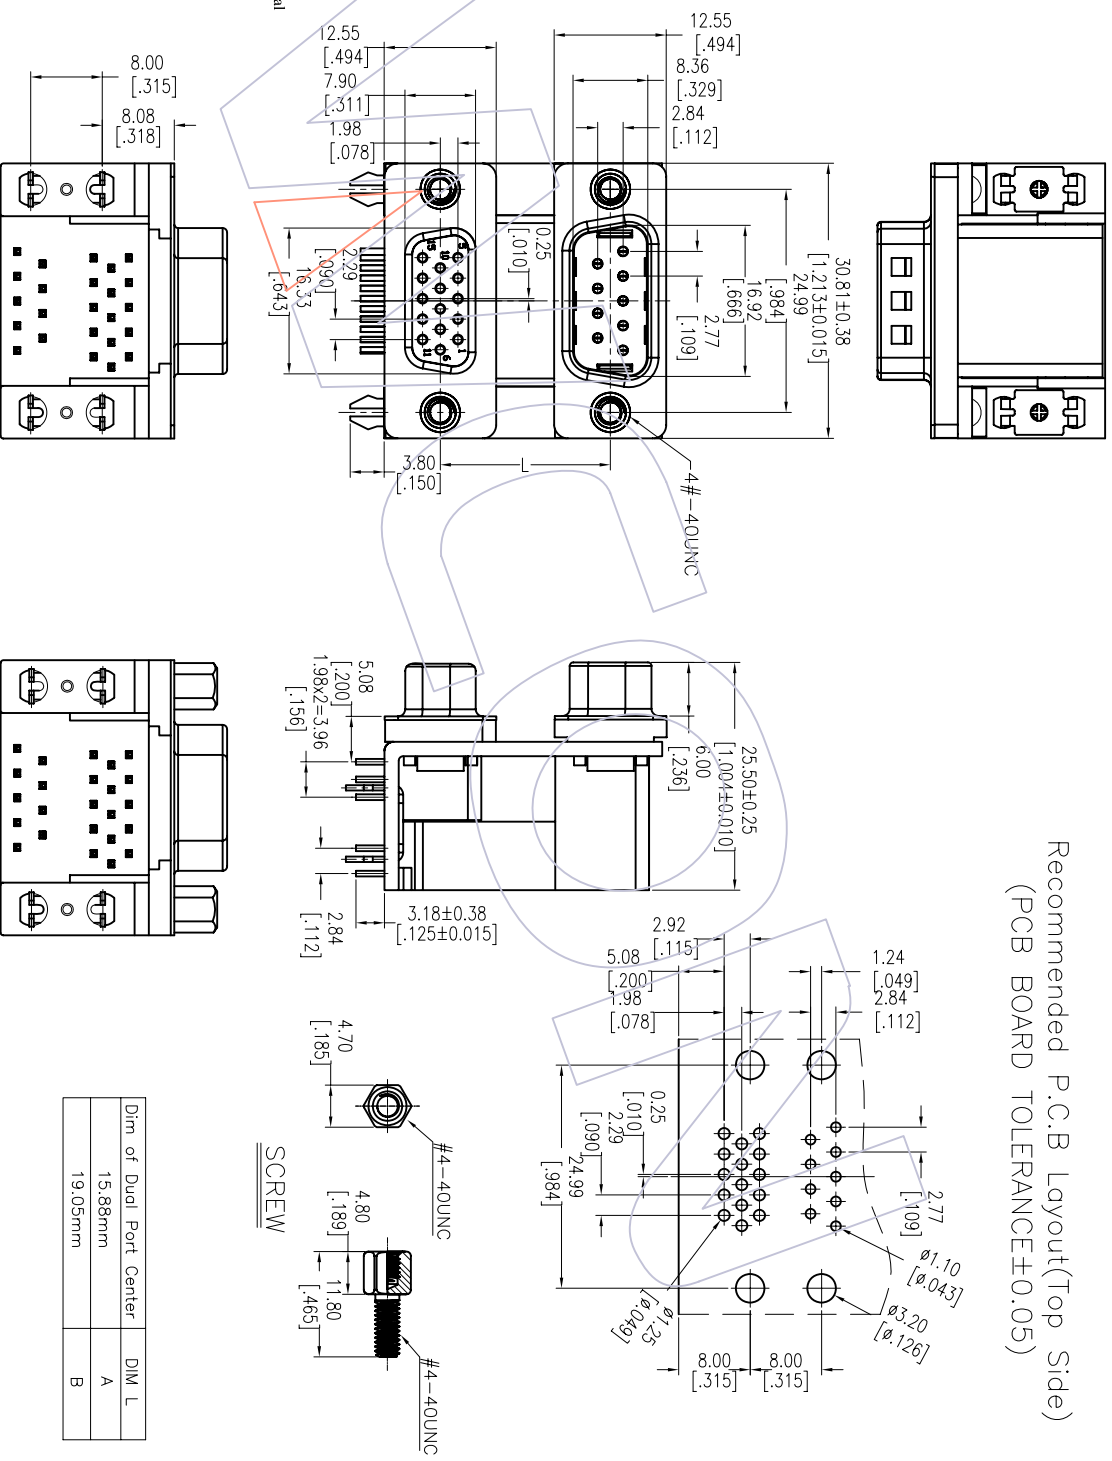


6202-X09MX15XXX12(WITHOUT SCREW)

6202-X09MX15XXX15(WITHOUT SCREW)

Dim of Dual Port Center	DIM L
15.88mm	A
19.05mm	B

SCREW

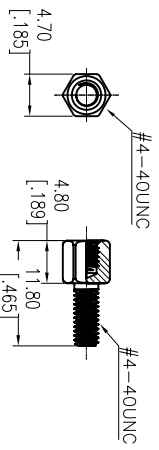

REV	DATE	MODIFICATION DESCRIPTION
A0	2013/01/10	NEW

OPERATION	DRAW	DATE
XX	JHuang	2013/01/10
XX	CHECK	DATE
XX	CHECK	DATE
XX	APPROVE	DATE

SCALE	FIT	PART NO.
XX	mm	6202-X09MX15FXXXXX
XX	A4	TITLE:
XX	1/1	D-SUB Right Angle Connector
XX	PROJ.	Dual Port
XX		Customer NO.



WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com