

HSF



NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C

Contact Material: Phosphor Bronze/Brass
 Contact plating: Sel. Au over Ni Δ
 Insulator Material: PBT+30%G.F UL94V-0
 Sheel: Cold Roller Steel, Ni Plated
 Nut: Brass, Sn over Ni Plated

Ordering Information

6224- XX F N XX X 0 X

No. of Pins 09, 15, 25, 37P	Contact Plating S0=Gold Flash/Ni S3=10u" Gold/Ni S4=15u" Gold/Ni S5=30u" Gold/Ni	Insulator Color B: Black U: Blue	Screw 1=W/O Screw thread (three part) 2=W/T Screw thread (three part) 3=W/O Screw thread (two part) 4=W/T Screw thread (two part) 5=W/T Screw thread, Don't lock (two part) 6=W/T Screw thread & Nut, Don't lock (two part)
--------------------------------	----------------------------------------------------------------------------------------------	----------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

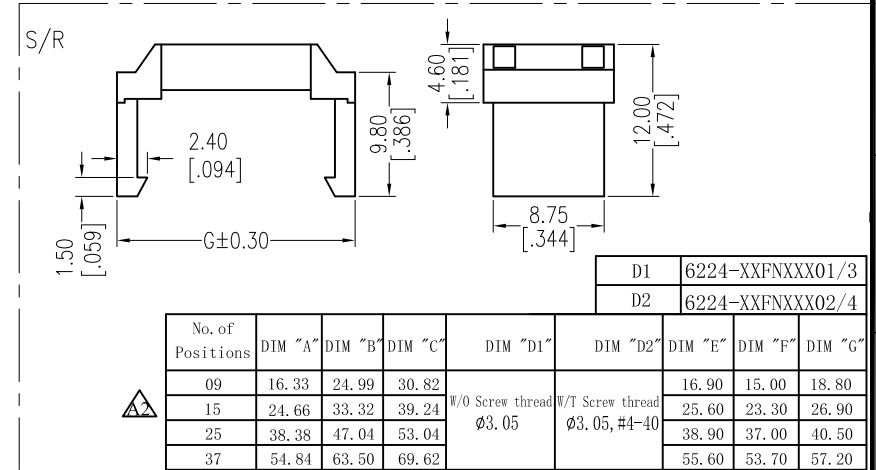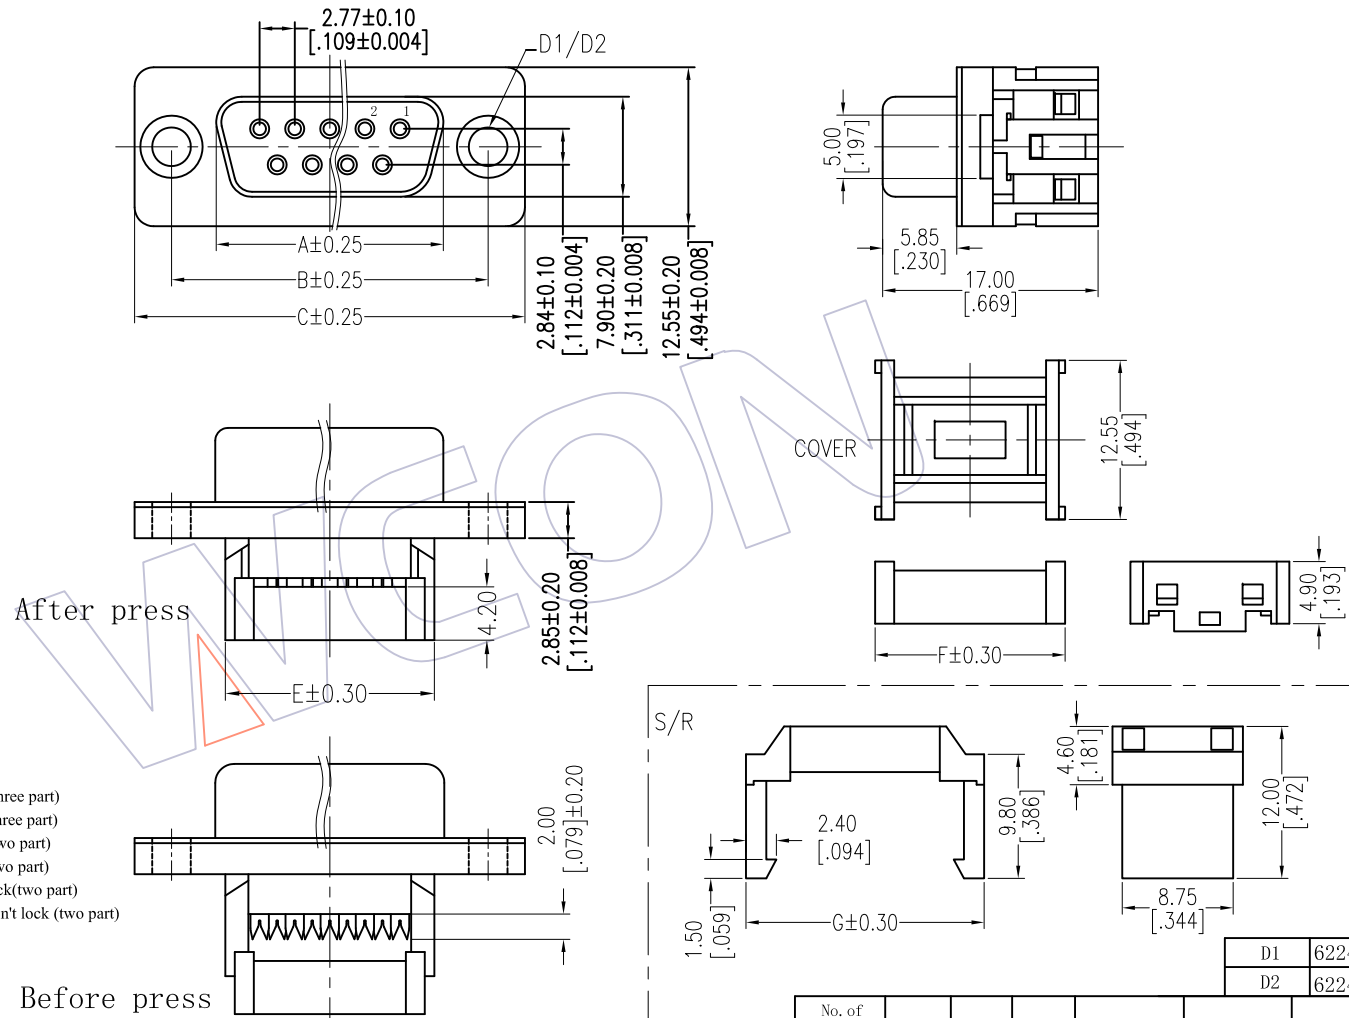

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
A2	2017/03/01	Modify	Δ	x.x ±0.40	Ding	2017/03/01	UNIT	mm	6224-XXFNXXX0X	
A1	2015/12/15	Modify	Δ	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
A0	2012/12/06	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	D-SUB FEMALE DUAL ROW IDC TYPE	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'			PROJ.	Φ	Customer NO.	