HSF

NOTES:
Current Rating:15A
Voltage Rating:300V
Contact Resistance:8milliohm Max
Withstand Voltage:AC2500V
Insulation Resistance:1000Megohm Min
Screw Torque: 4.4 lbf.in
Wire range: 12-30AWG
Operation Temperature:-40℃ to +105℃

Housing Material:PA66 UL94V-0
Screw:Steel
Pin Block:Brass
Cite Feet:Brass

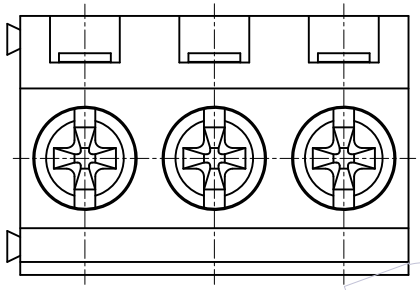



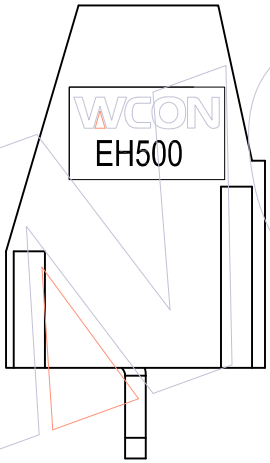

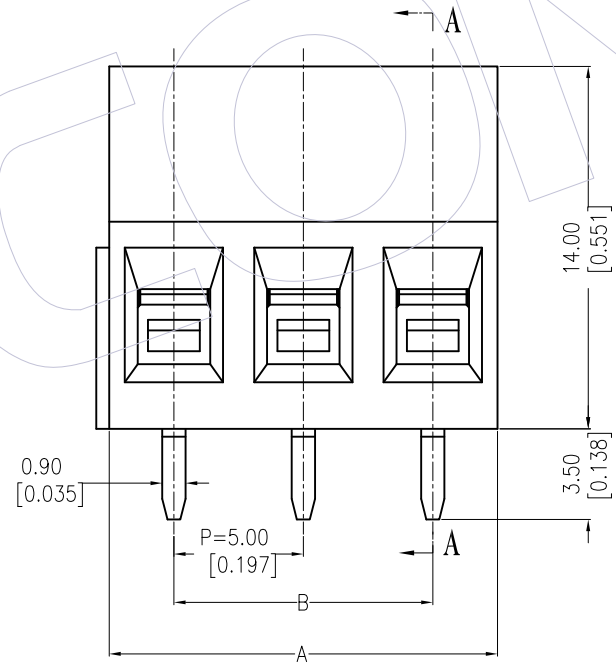

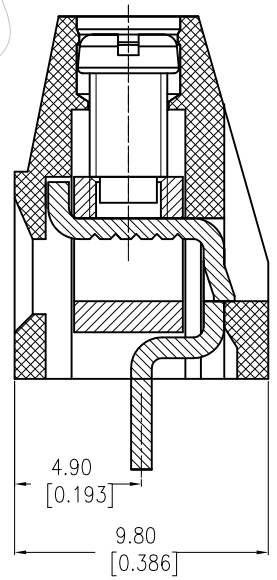

SECTION A-A

Ordering Information:

E H 500 - 140 S XX A SM 1

Picth	Housing High	No.of Pins	Color	Contact Plated
500=5.00	140=14.00	02-20P	A=Green	SM=Matte Tin

△2

3P	15.00± 0.25	10.00± 0.20
2P	10.00± 0.20	5.00± 0.15
PIN	A	B

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2013/04/25	Modify	△2
A1	2012/12/07	MODIFY EH500-00-XX-A-SM ——→ EH500-140SXXASM1	△1
A0	2011/06/04	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Tsingsn	DATE	2013/04/25
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. EH500-140SXXASM1 △1

TITLE: 5.00mm Pitch Euro Terminal Blocks

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com