

HSE

NOTES:






- Rated Current: 18.0 AMP
- Contact Resistance: 8 mΩ Max
- Withstand Voltage: 2000 V AC/DC
- Insulation Resistance: 1000 MΩ min
- Operation Temperature: -40°C to +105°C
- Wire Range: 30~12 AWG
- Wire Strip Length: 7 mm
- No. of Positions: 2~20
- Screw Counter Torison Force: 4.4 lbf.in Min.

- Terminal Material: Phosphor Bronze
- Terminal Plating: Matte Tin Plated Over Nickel
- Pin Block Material: Brass
- Pin Block Plating: Nickel Plated Over All
- Screw Material: Steel
- Screw Plating: Nickel Plated Over All
- Up Cover Material: PA66 UL94 V-0
- Below Cover Material: PA66 UL94 V-0

Ordering Information:

P F 750 - A XX A SM N 1

F=Female Pitch 750=7.50 No. of Pins 02-20P Color A=Green Contact Plated SM=Matte Tin Type N=Without Screw

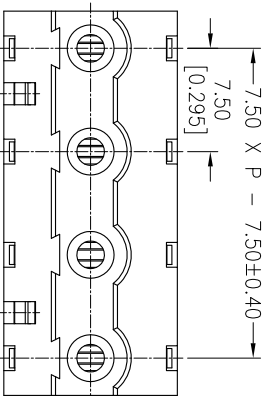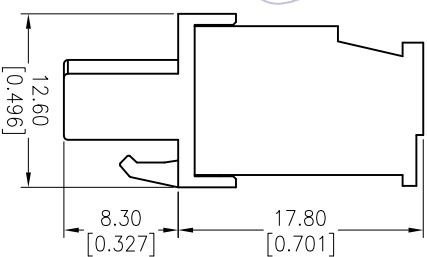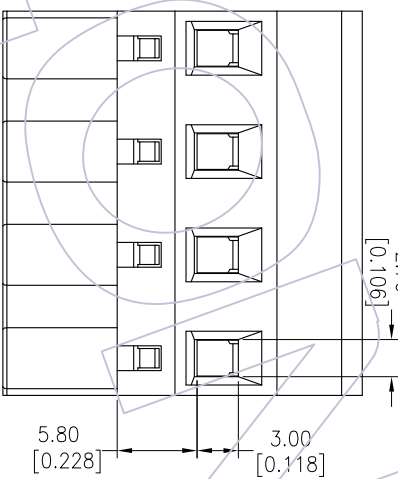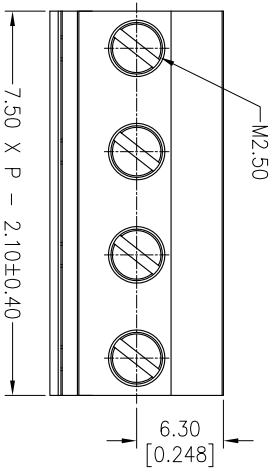

OPERATION	XX	±0.40	DRAW	Tsing sn	DATE	2013/11/08	SCALE	FIT	PART NO.	PF750-AXXASMN1
	XXX	±0.25		CHECK		CHECK		DATE		mm
ANGLE	XXX	±0.15	APPROVE		DATE		SHEET	1/1	TITLE:	7.50mm Pitch Female Pluggable Terminal Blocks
	XXX	±0.15								
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					
A0	2013/11/08	NEW								
1										

WCON

WCON-Dongguan
 Http: www.wcon.com
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com