

# HSE

**NOTES:**






- Rated Current:18.0 AMP
- Contact Resistance:8 mΩ Max
- Withstand Voltage:2000 V AC/DC
- Insulation Resistance:1000 MΩ min
- Operation Temperature:-40℃ to +105℃
- Wire Range:30~12 AWG
- Wire Strip Length: 7 mm
- No.of Positions:2~20
- Screw Counter Torison Force: 4.4 lbf.in Min.

- Terminal Material:Phosphor Bronze
- Terminal Plating:Matte Tin Plated Over Nickel
- Pin Block Material:Brass
- Pin Block Plating:Nickel Plated Over All
- Screw Material: Steel
- Screw Plating:Nickel Plated Over All
- Up Cover Material:PA66 UL94 V-0
- Below Cover Material:PA66 UL94 V-0

## Ordering Information:

P F 750 - B XX A SM N 1

F=Female Pitch 750=7.50 No.of Pins 02-20P Color A=Green Contact Plated SM=Matte Tin Type N=Without Screw

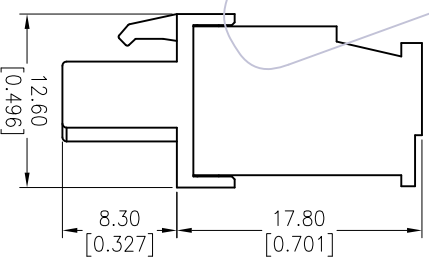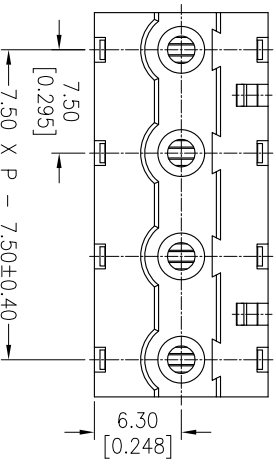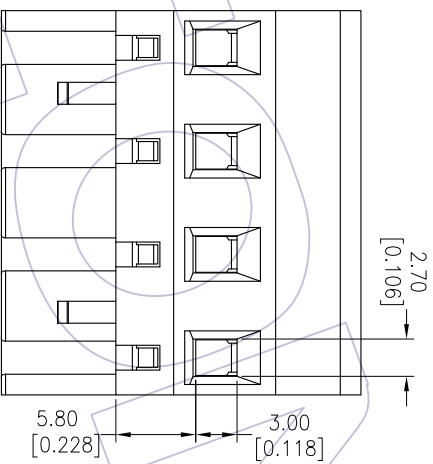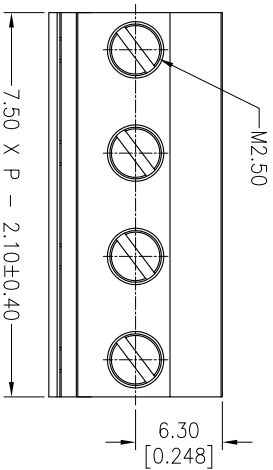

OPERATION	XX	±0.40	DRAW	Tsingsun		DATE	2013/11/08		PART NO.	PF750-BXXASMN1	
	XXX	±0.25		CHECK	DATE		SCALE	FIT		UNIT	mm
ANGLE	XXX	±0.15	APPROVE	DATE	SIZE	A4	SHEET	1/1	TITLE:	7.50mm Pitch Female Pluggable Terminal Blocks	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	PROJ.	Customer NO.					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com