

# HSF

**NOTES:**

Withstand Voltage: 500V AC/Minute  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°C to +105°C




Insulator Material: PBT+30%G.F UL94V-0  
 Shell: Cold Roller Steel, Sn Or Ni Plated  
 Nut: Brass, Sn over Ni Plated

## Ordering Information

6211-XX M X 00 X 01

No. of Pins: 15, 26, 44, 62P  
 Type: B=With Back Nut, F=With Front Nut, N=Without Nut  
 Insulator Color: B=Black, U=Blue

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIM "F"
15	30.81	24.99	16.92	2.29	0.25	19.10
26	39.14	33.32	25.25	2.29	0.51	27.75
44	53.04	47.04	38.96	2.29	0.51	41.30
62	69.32	63.50	55.42	2.41	0.58	57.40

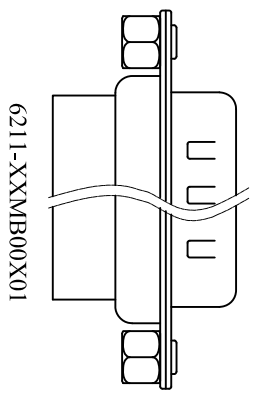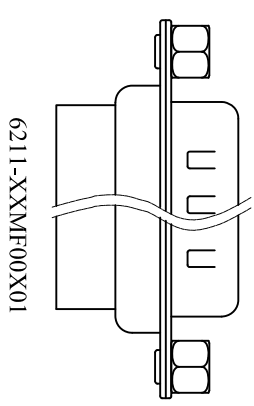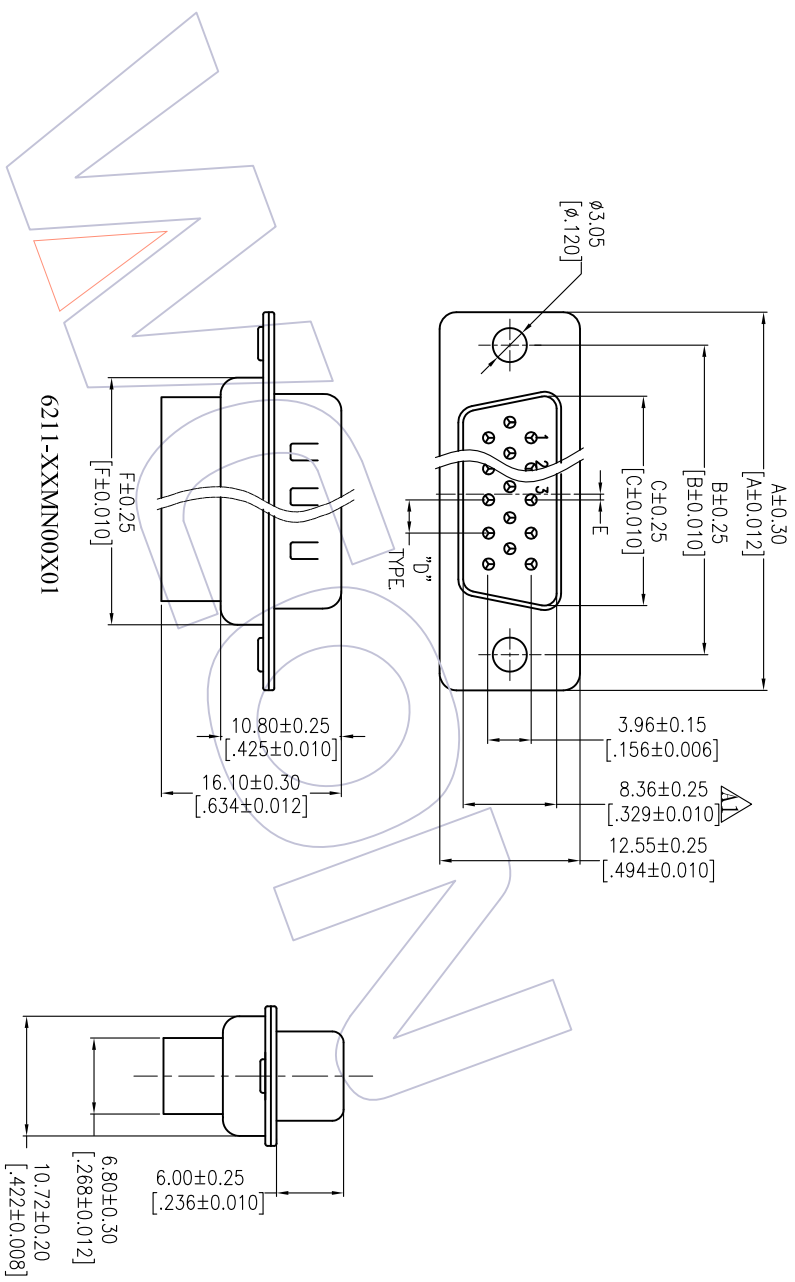

A2	2014/05/28	Modify 6211-XXMXXXB01 to 6211-XXMXX00X01	△	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	<b>WCON</b> Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A1	2013/04/10	Modify the Dimension 9.36 To 8.36	△	X.XX ±0.40	Allen	2014/05/28	mm	A4	6211-XXMXX00X01	
A0	2012/12/03	NEW	---	X.XXX ±0.15	CHECK	DATE	SHEET	1/1	D-SUB MALE THREE ROW CRIMP TYPE	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	PROJ.		Customer NO.	