

# HSF

**NOTES:**



Withstand Voltage: 500V AC/Minute  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°C to +105°C  
 Insulator Material: PBT+30%G.F UL94V-0  
 Shell: Cold Roller Steel, Sn Or Ni Plated  
 Nut: Brass, Sn over Ni Plated

## Ordering Information


6211-XX F X 00 X 01

No. of Pins  
 15, 26, 44, 62P  
 Type  
 B=With Back Nut  
 F=With Front Nut  
 N=Without Nut  
 Insulator Color  
 B:Black  
 U:Blue

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIM "F"
15	30.81	24.99	16.33	2.29	0.25	19.10
26	39.14	33.32	24.66	2.29	0.51	27.75
44	53.04	47.04	38.38	2.29	0.51	41.30
62	69.32	63.50	54.84	2.41	0.58	57.40

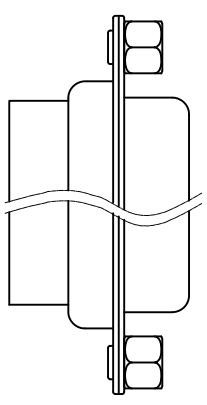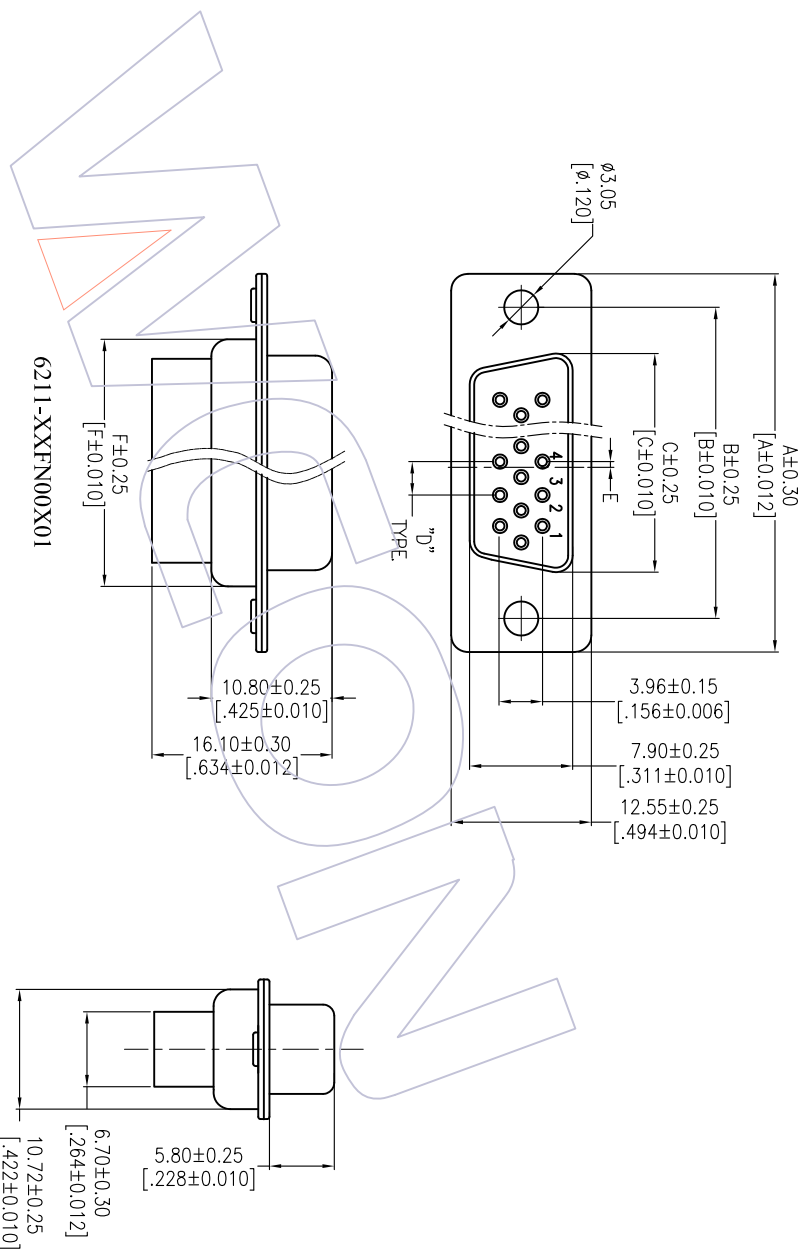

6211-XXFP00X01

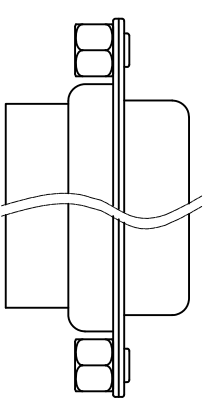

6211-XXFB00X01

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2014/05/28	Modify 6211-XXXXXXB01 to 6211-XXFX00X01		XX ±0.40	Allen	2014/05/28	UNIT	mm	6211-XXFX00X01	D-SUB FEMALE THREE ROW CRIMP TYPE	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/12/03	NEW		X.XXX ±0.15	CHECK	DATE	SIZE	A4				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.			

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com