

HSF

NOTES:


Rated Current:18.0 AMP
 Contact Resistance:8.0 milliohm Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 Megaohm min
 Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)
 Contact Material:Brass
 Terminal Plating:
 Matte Tin Plated Over Nickel



Ordering Information:

P M 762- 1 S XX A SM 3


M=Male Pitch No.of Pins Color Contact Plated Series No.
 762=7.62 02-20P A=Green SM=Matte Tin

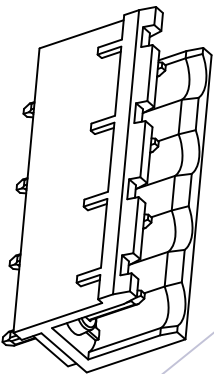

3D VIEW(REF.)
 SCALE: 1:2

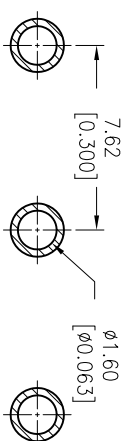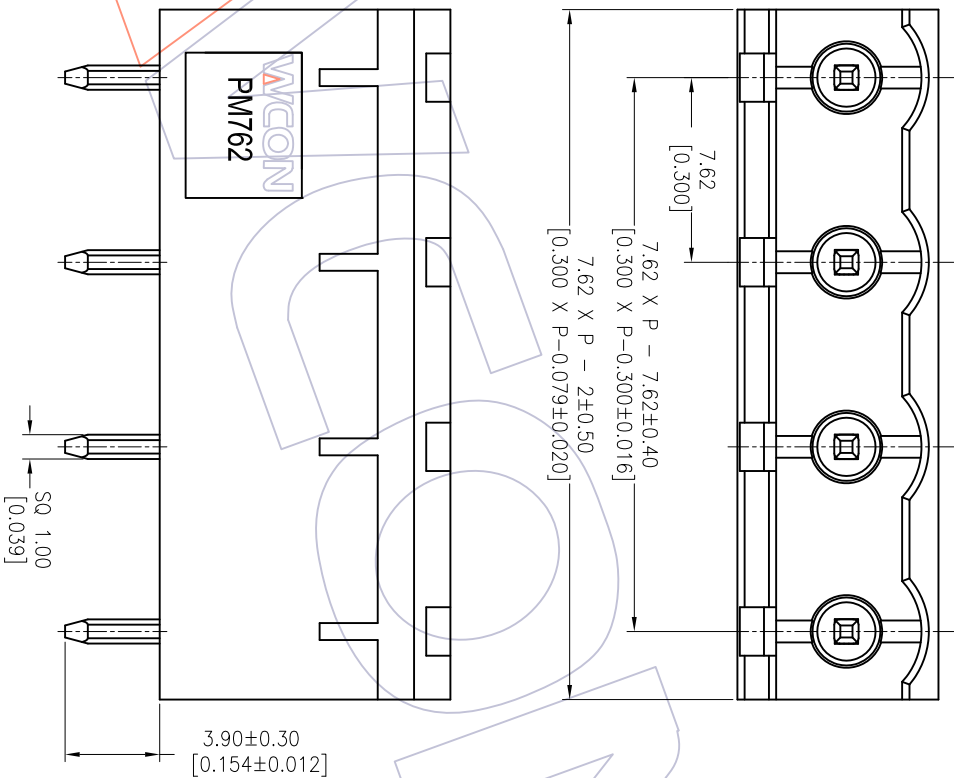

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

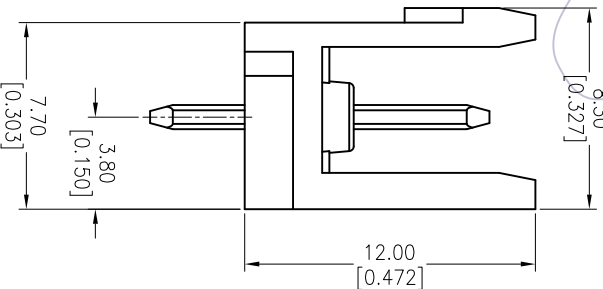

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2013/10/24	NEW		XX ±0.40	Tsingn	2013/10/24	mm A4	inch 1/1	PM762-1SXXASM3	7.62mm Pitch Male Pluggable Terminal Blocks	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				XXX ±0.25	CHECK	DATE	UNIT	SIZE				
				XXX ±0.15	APPROVE	DATE	SHEET	1/1				
				Angle ± 3'	PROJ.							
				DIM TOL								



Http: www.wcon.com