



HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC Δ
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Insulator Material: PBT+30%G.F UL94V-0
 Mated with: 3210 Series
 Used with: 3210-T

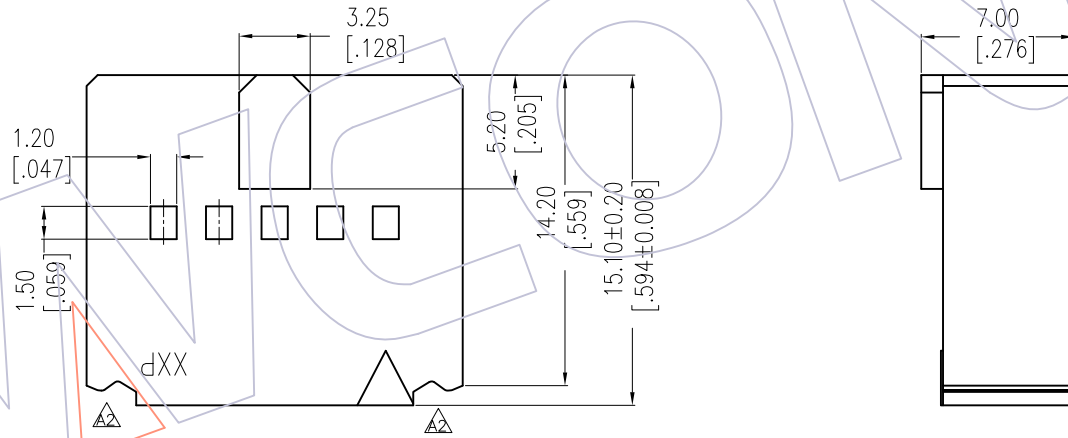


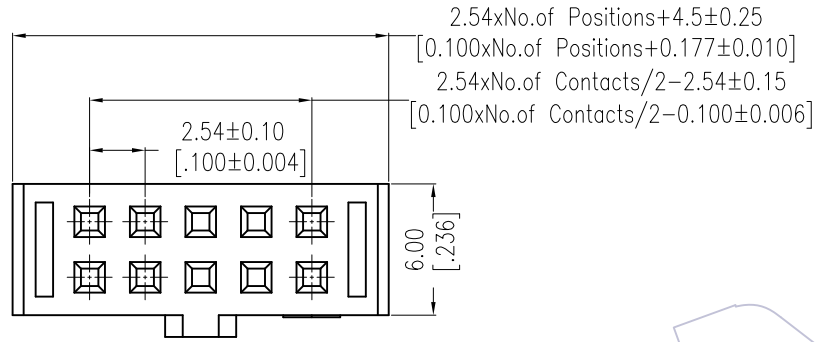

Ordering Information

3210 - H XX B 01

No. of pins
10P~50P

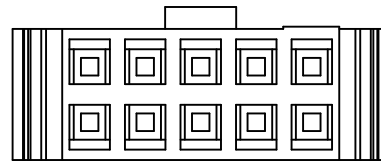Color
B=Black



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com
A2	2017/05/19	Modify	Δ	x.x ±0.40	Ding	2017/05/19	UNIT	mm	3210-HXXB01	
A1	2013/02/25	Modify	Δ	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm" T" TYPE HOUSING H=15.10	
A0	2012/10/08	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	
				Angle ± 3'			PROJ.			
				DIM TOL						