





NOTES:  
 Rated Current: 1.0AMP.  
 Contact Resistance: 30mΩ Max.  
 Withstand Voltage: 500V AC for 1minute  
 Insulation Resistance: 3000MΩ Min.  
 Operation Temperature: -40°C to +105°C  
 Terminated with AWG 28#

Contact Material: Phosphor Bronze(C5191)  
 Contact Plating: Au over Ni  
 Main Body Material: PBT+30%G.F  
 Cover Material: PBT+30%G.F

# Ordering Information

5251 - XX Y P SX X N 01

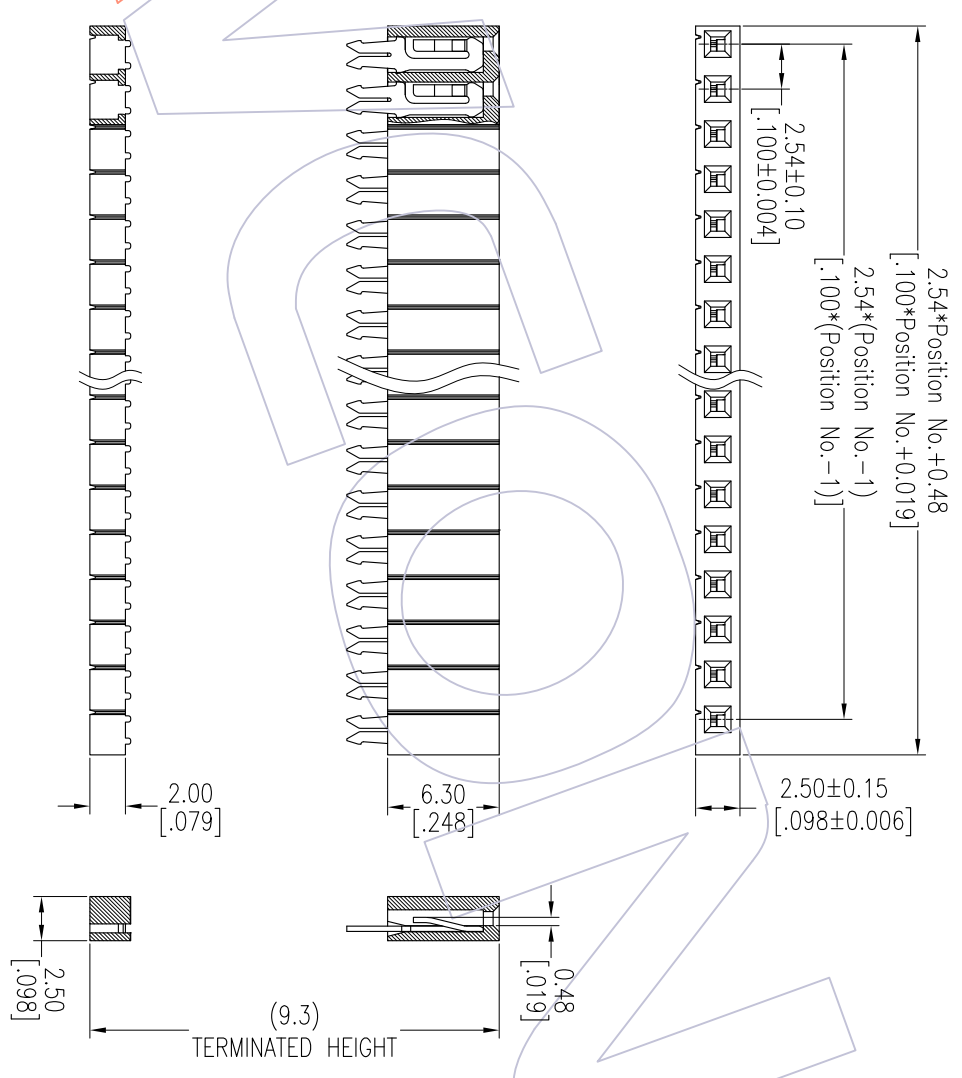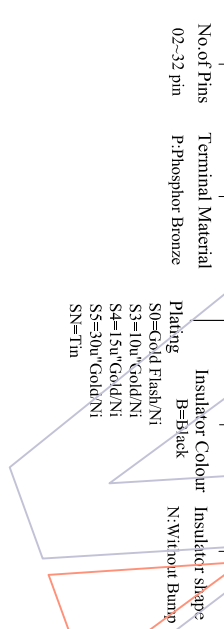

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE: 2.54Pitch IDSS CONN	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2015/02/05	NEW		X.X	JYHuang	2015/02/05	Fit mm	5251-XXYP SXBN01			
				X.XX	CHECK	DATE	SIZE				
				X.XXX	± 0.15	DATE	SHEET				
				Angle	± 3'	DATE	1/1	Customer NO.			
				DIM	TOL	DATE	PROJ.				



Http: www.wcon.com