

HSF


NOTES:
 Rated Current:1.0AMP.
 Contact Resistance:15mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-55°C to +105°C

Contact Material:Phosphor Bronze(C5191)
 Contact Plating: Au Or Sn over Ni
 Main Body Material:PBT+30%G.F
 Cover Material:PBT+30%G.F

Ordering Information

5214-XX U P SX B W 01

No.of Pins 06-60pin
 Terminal Material P:Phosphor Bronze
 Contact Plating B:Black
 Color Insulator W=Width Bump
 Insulator shape
 S0=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=1um

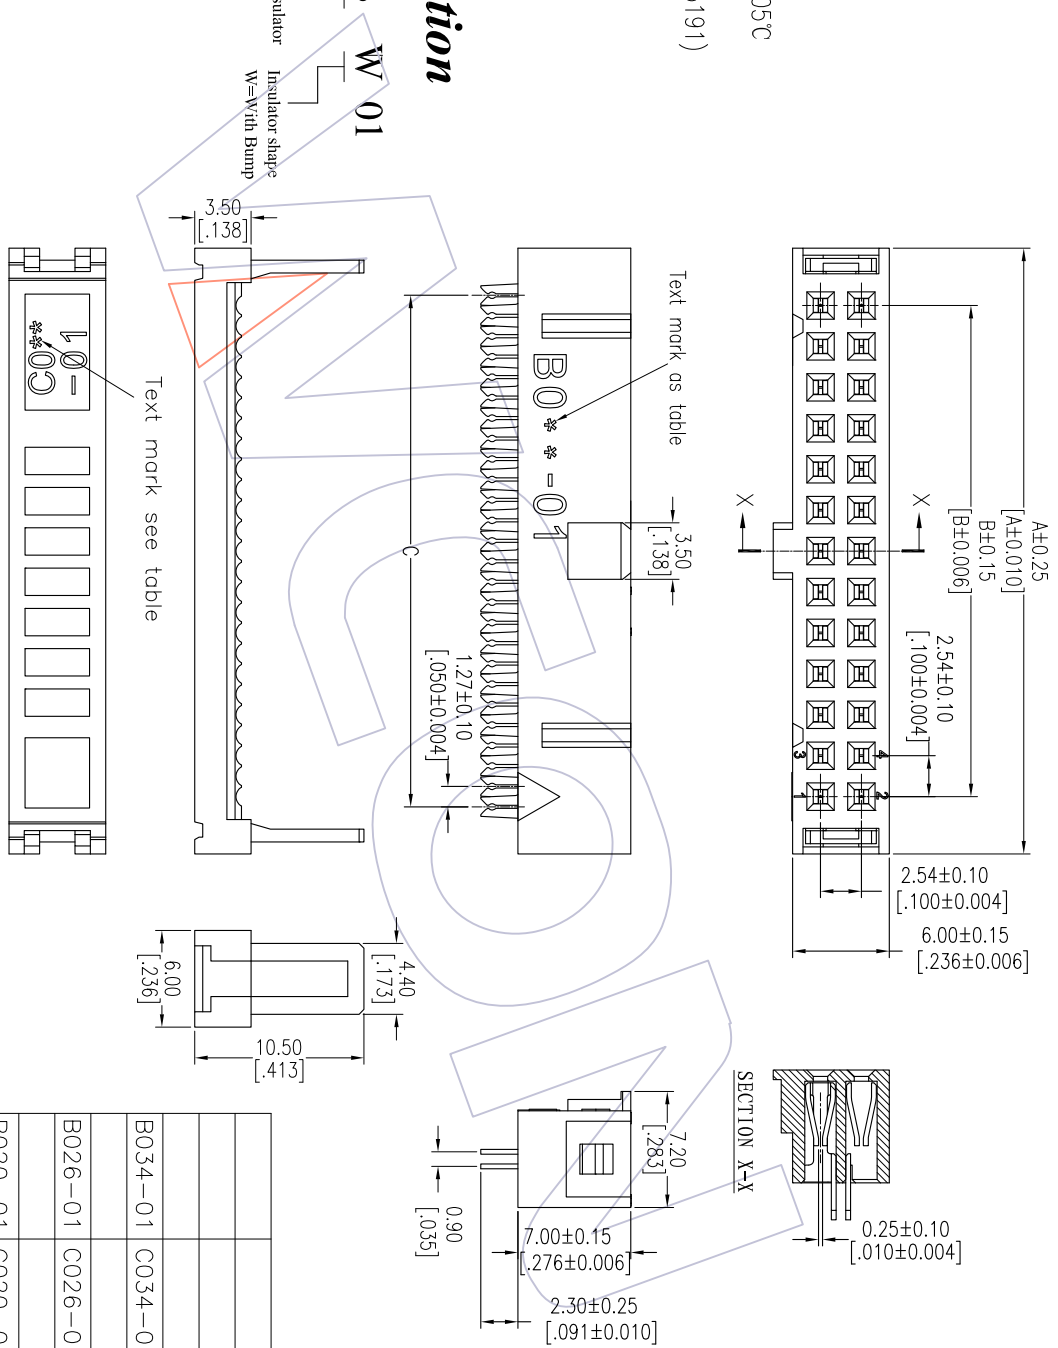

			60	80.77	73.66	74.93
			50	68.07	60.96	62.23
			40	55.37	48.26	49.54
			34	47.75	40.64	41.91
			30	42.67	35.56	36.83
			26	37.59	30.48	31.75
			24	35.05	27.94	29.21
B020-01	C020-01		20	29.97	22.86	24.13
B016-01	C016-01		16	24.89	17.78	19.05
B014-01	C014-01		14	22.35	15.24	16.51
HOUSING TEXT MARK	COVER TEXT MARK	POS.	A	B	C	

OPERATION	DRAW	DATE	SCALE	PART NO.
XX	JYHuang	2014/12/31	Fit	5214-XXUPSXBW01
XX	CHECK	DATE	UNIT	TITLE:
X.XXX			mm	2.54Pitch IDC SOCKET
X.XXX	± 0.15	DATE	SIZE	Customer NO.
Angle	± 3'	DATE	A4	
DIM	TOL	APPROVE	SHEET	
		APPROVE	1/1	
		DATE	PROJ.	

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014/12/31	NEW	