

# HSE


**NOTES:**

- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au or Sn over Ni
- Insulator Material: PA9T+30%GF UL94V-0

## Ordering Information

3136-XX M XX BK 00 X 2

No. of Pins	Contact Plating	Color	Insulator	Packing
6 34	G=Gold	Flash	B=Black	T=Tube
10 40	G1=5μ"Gold			Pe=Tube+CAP
14 44	G2=5μ"Gold			R=Tube+Keel+CAP
16 50	G3=10μ"Gold			
20 60	G4=15μ"Gold			
24 64	G5=30μ"Gold			
26 80	S0=Gold Flash/Tin			
30 100	S1=5μ"Gold/Tin			
	S2=5μ"Gold/Tin			
	S3=10μ"Gold/Tin			
	S4=15μ"Gold/Tin			
	S5=30μ"Gold/Tin			
	SN=Tin			

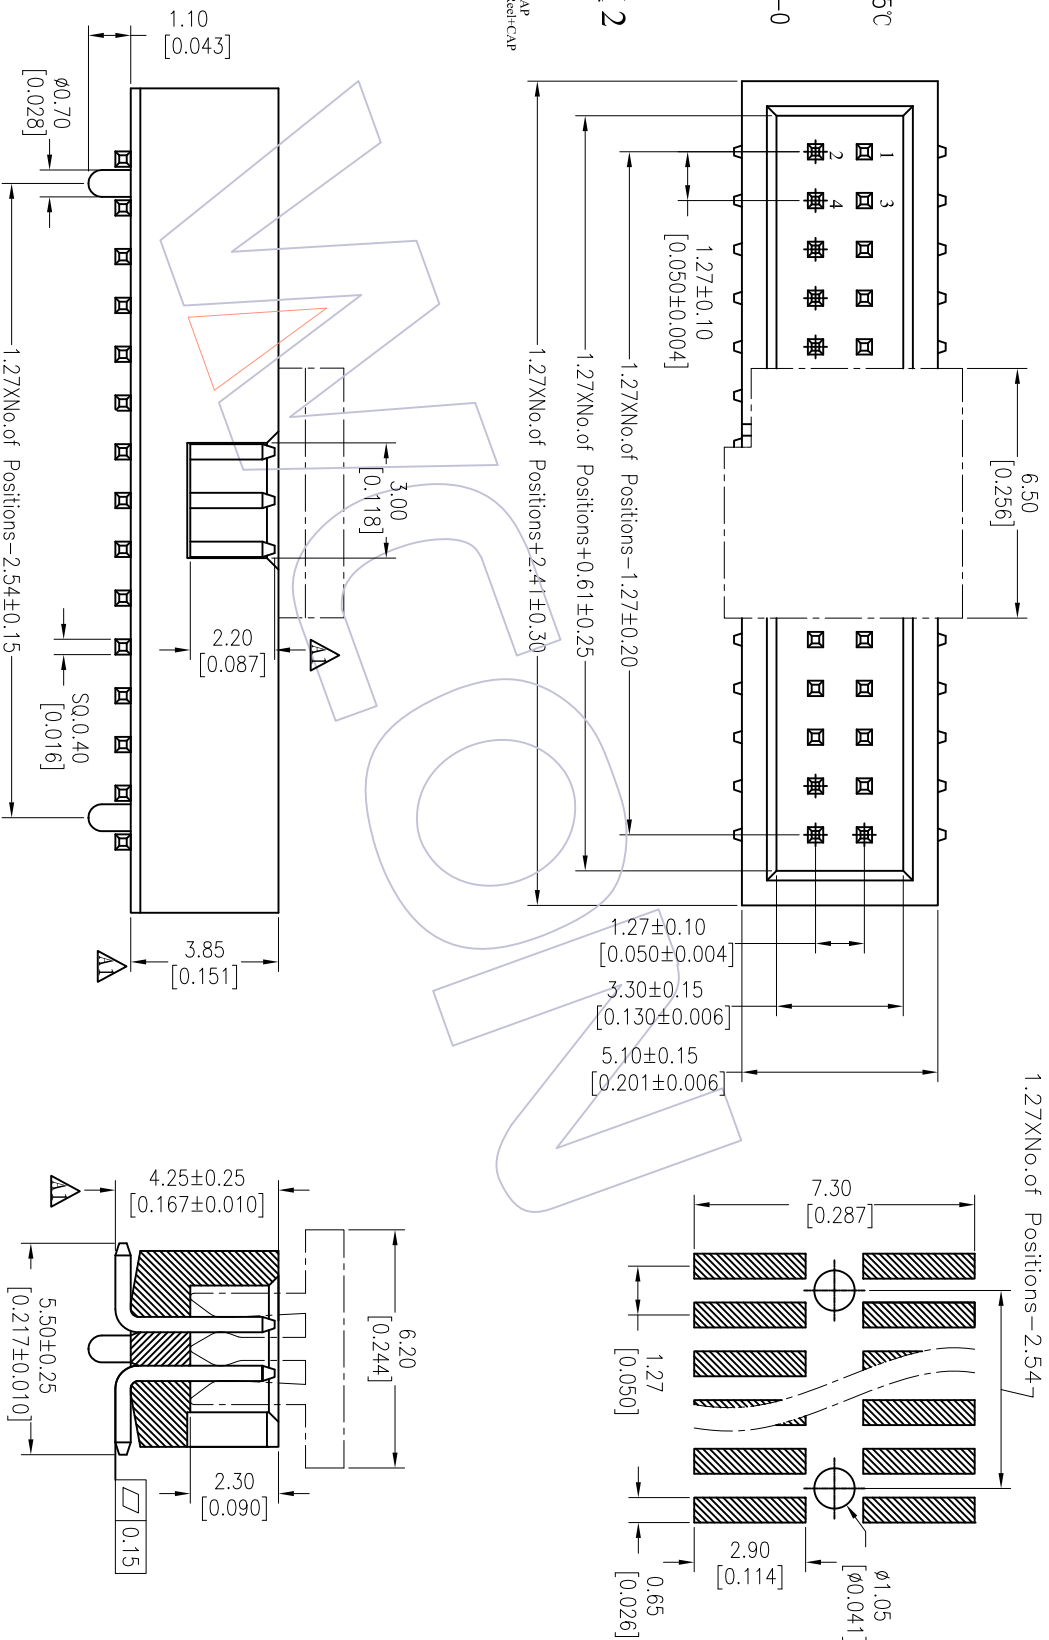

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshun
A1	2014/06/06	Modify	△	XX ±0.40	Allen	2014/06/06	mm A4	1/1	3136-XXMXXBK00X2	1.27mm BOX HEADER H=3.85 180° SMT	Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2013/11/15	NEW	—	XXX ±0.25	CHECK	DATE	inch				Fax: +86 769 85358915	Fax: +86 512 57468468
				X.XXX ±0.15	APPROVE	DATE	SHEET				E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle ± 3°			PROL.					
				DIM TOL								

# WCON

Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshun  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com