HSF

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+30%G.F UL94V−0

Ordering Information

3122-XX M XX B K00 X 2

No.of Pins	Contact Plating	Color Insulator	Packing
8P-64P	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	B=Black	T=Tube R=Reel

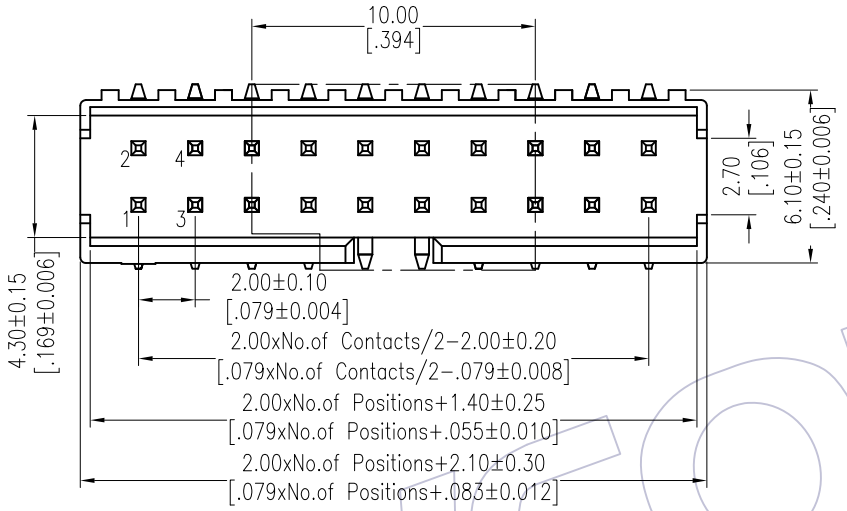

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

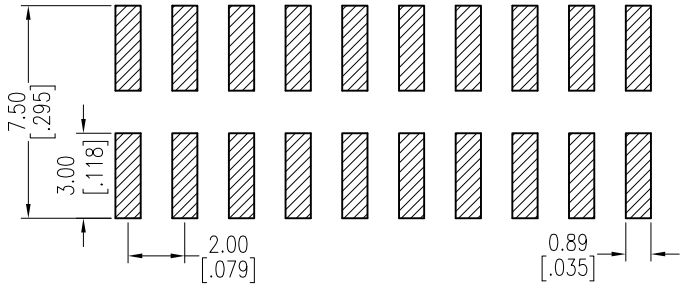

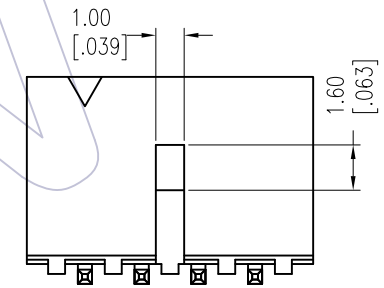

8P VIEW

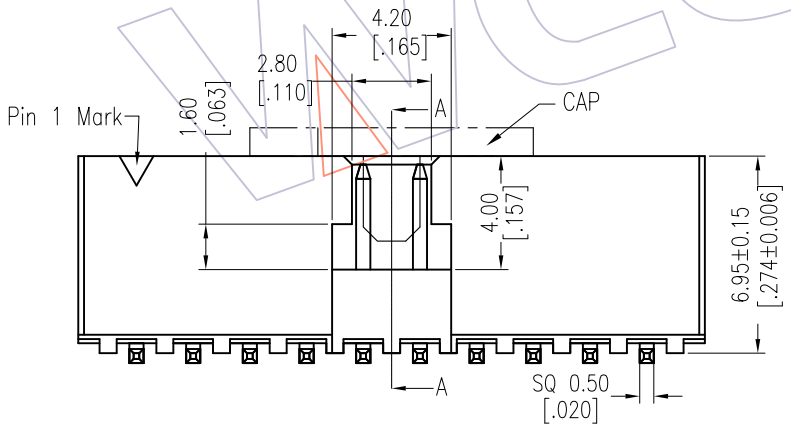

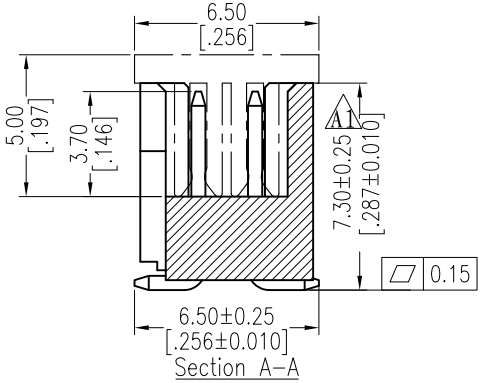

Section A−A

Item	Pitch	Mating
Standard	2.00	5224
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2015/03/16	Modify	A1
A0	2012/09/24	NEW	------

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	Allen	2015/03/16	UNIT	mm
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15			SHEET	1/1
Angle	± 3°	APPROVE	DATE	PROJ.	
DIM	TOL				

PART NO. 3122-XXMXXBK00X2
TITLE: 2.00 BOX HEADER SMT H=6.95 "F" TYPE
Customer NO.

WCON
Http: www.wcon.com
WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com
WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com