

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F. UL94V-0





Ordering Information

3122-XX R XX B K00 X 2

- No. of Pins 8P-64P
- Contact Plating G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=1Tin
- Color Insulator B=Black T=Tube
- Packing Pin 1 Mark

| | | |
|-----------|-------|--------|
| Item | Pitch | Mating |
| Standard | 2.00 | 5224 |
| Alternate | | |

| | | |
|-----|------------|--------------------------|
| REV | DATE | MODIFICATION DESCRIPTION |
| A0 | 2012/09/24 | NEW |

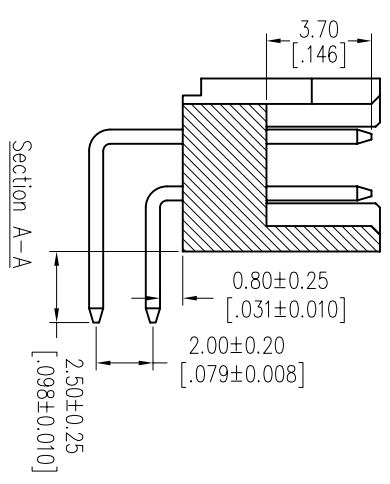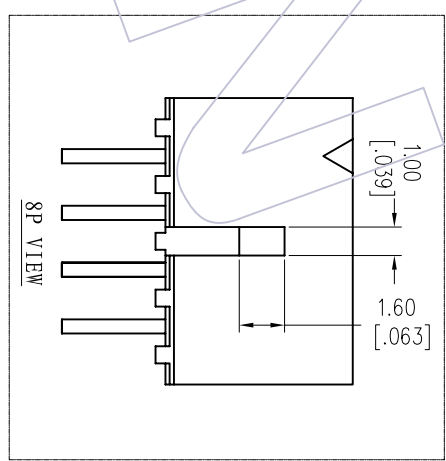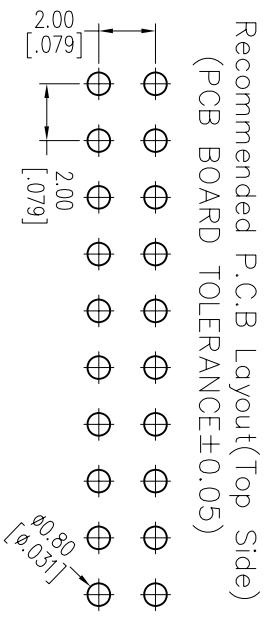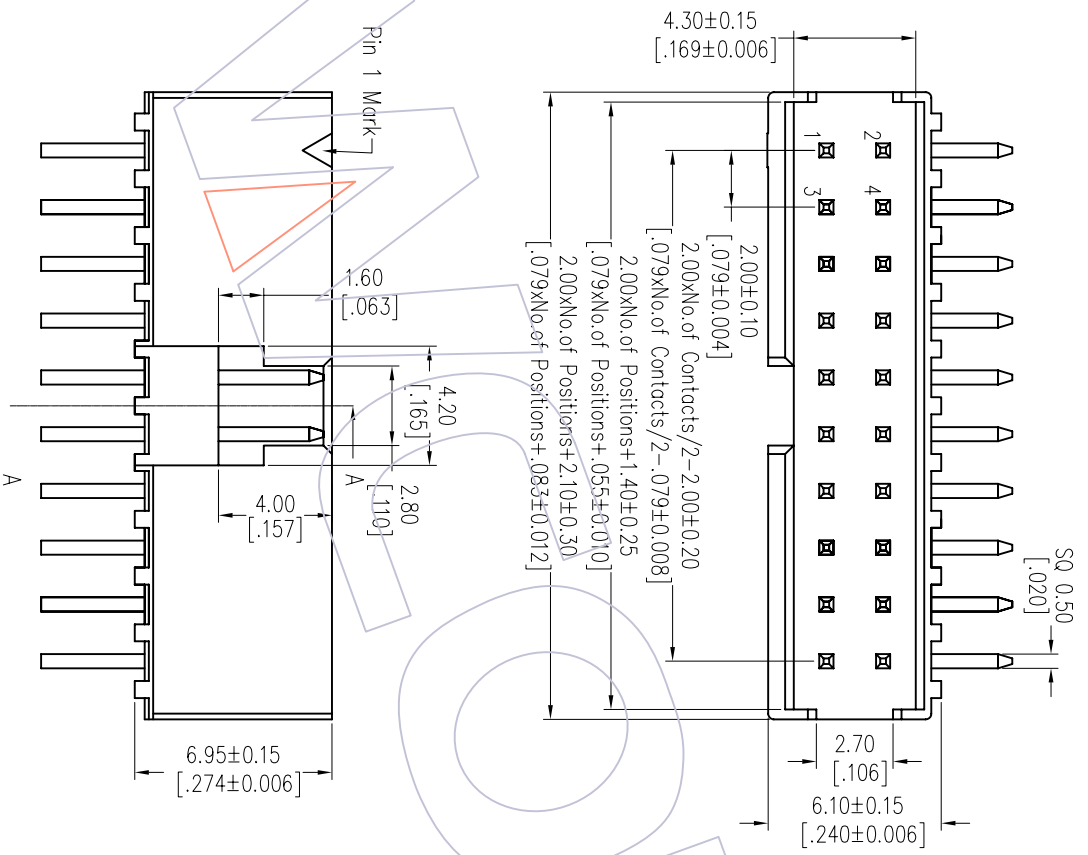

| | | | | | |
|-----------|---------|------------|-------|-------|---------------------|
| OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
| XX | JYHuang | 2012/09/24 | mm | | 3122-XXRXXBK00X2 |
| XX | CHECK | DATE | UNIT | | TITLE: |
| X.XXX | | | A4 | | 2.00 BOX HEADER 90° |
| Angle | APPROVE | DATE | SHEET | PROJ. | Customer NO. |
| ± 3' | | | 1/1 | | |
| CHANG | | | | | |
| DIM | | | | | |
| TOL | | | | | |

WCON

Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com