

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0

Ordering Information



3123-XX M XX B D00 X X

No. of Pins	Contact Plating	Color Insulator	Packing Series No.
10 30	G0=Gold Flash	B=Black	1=Type1
14 34	G3=10u"Gold	W=White	2=Type2
16 40	G4=15u"Gold		
20 44	G5=30u"Gold		
24 50	S0=Gold Flash/Tin		
26 60	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=1in		

Item	Pitch	Mating	Dim(W)	Dim(C)
Standard	2.00	2263	6.50	
Alternate				

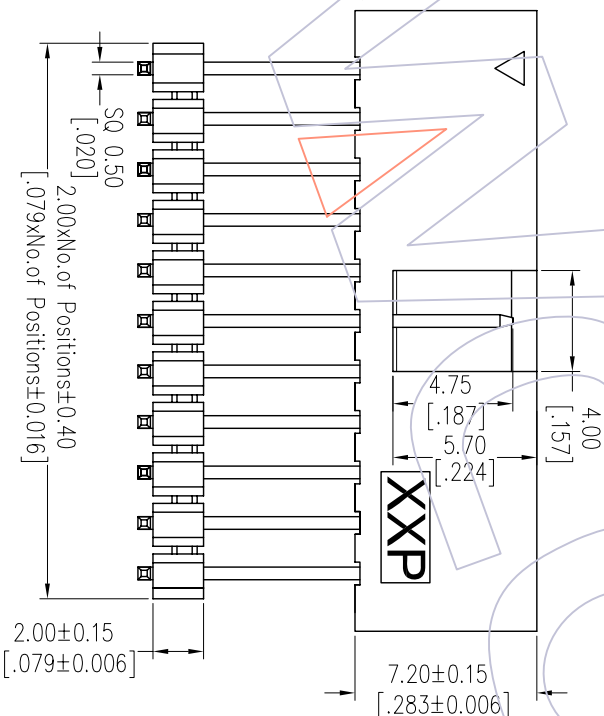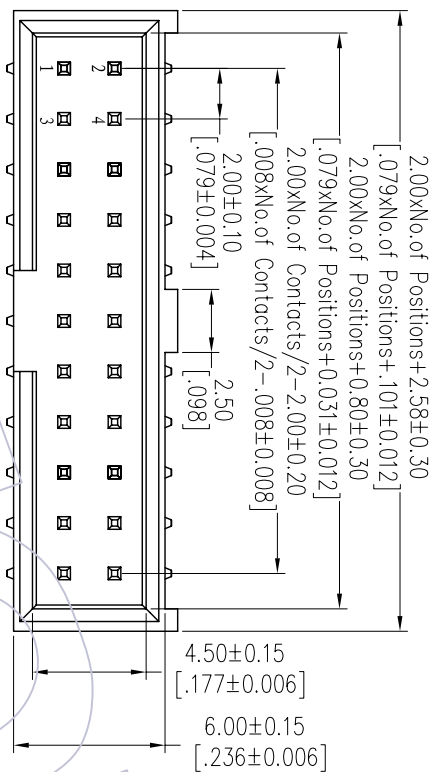

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

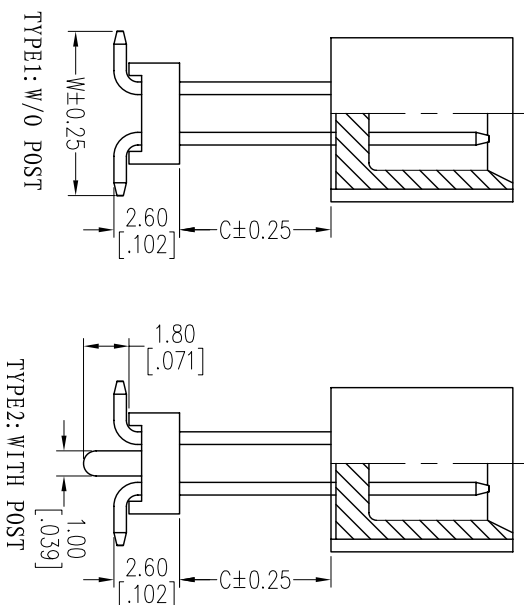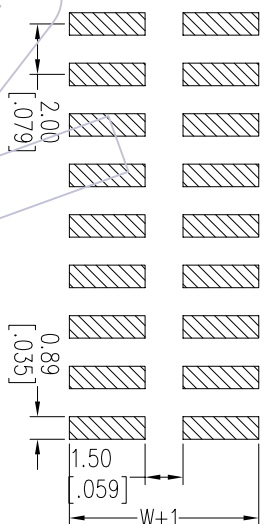

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/09/24	NEW

OPERATION	DRAW	DATE	SCALE	FIT
XX	JYHuog	2012/09/24	UNIT	mm
XX	CHECK	DATE	SIZE	A4
X.XXX	±0.25		SHEET	1/1
Angle	±0.15		PROJ.	
± 3'				

PART NO.	3123-XXMXXBD00XX
TITLE:	2.00 BOX HEADER SMT H=7.2 ADD HOUSING
Customer NO.	
WCON-Dongguan Http: www.wcon.com WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com	

WCON