

HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

6P Without Slot "M" and "N"
 8P-12P With Slot "M", Without Slot "N"
 14P-64P With Slot "M" and "N"

Ordering Information

5211-XX D B XX B X 03




Two Parts
 Cont+Cover 06P 26P
 08P 30P
 10P 34P
 12P 36P
 14P 40P
 16P 44P
 18P 50P
 20P 60P
 22P 64P
 24P

No. of Pins
 SO=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=Ti

Contact Plating
 Color Insulator
 Bump

B=Black
 G=Grey(427C)
 N=W/O Bump
 W=With Bump

Item	Pitch	Mating
Standard	2.54	3110/3210
Alternate		

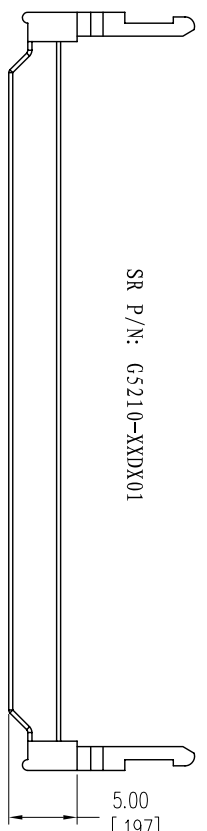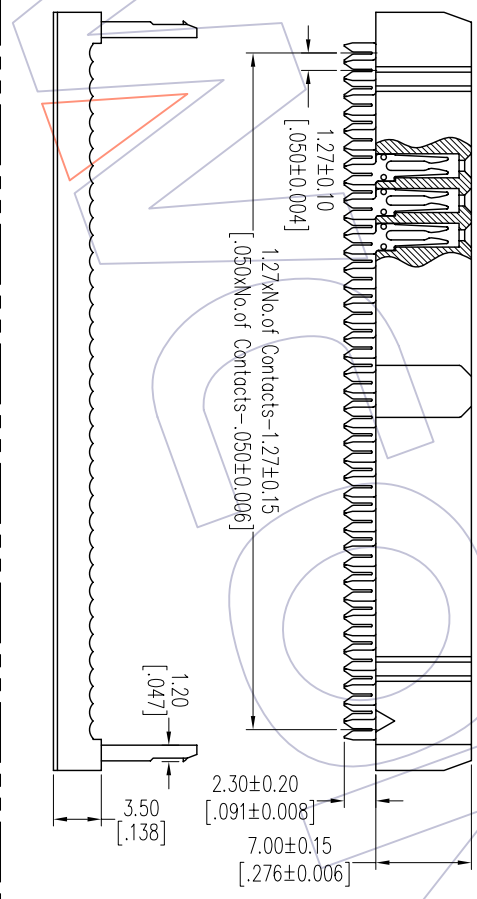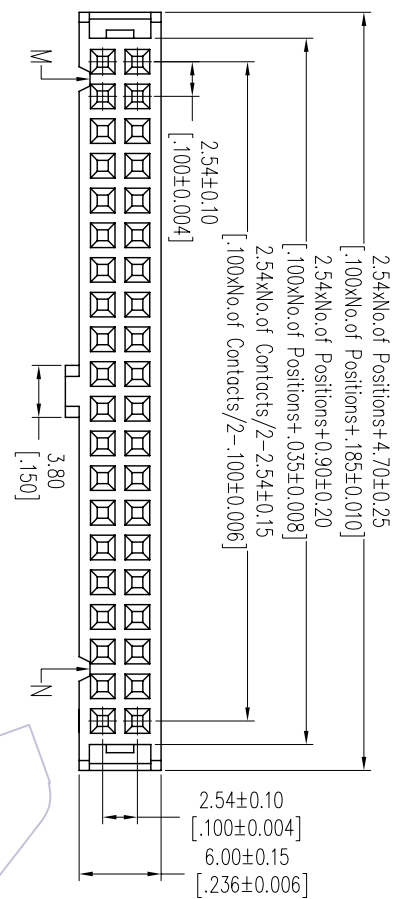

SR P/N: G5210-XXDX01

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JHluong	2012/10/11	UNIT	mm	5211-XXDBXXBX03
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.15	±0.15	SHEET	1/1	2.54 IDC SOCKET+SR
Angle	± 3'	APPROVE	PROJ.	Customer NO.	(BOTH SIDE CONTACT) 中蓋帶卡点
DIM	TOL	DATE			
CHANGE					
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/10/11	NEW			

WCON

Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com