



HSF

NOTES:

Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-25℃ to +85℃

Insulator Material:PBT UL94V-0
 Use with:3220-T
 Mated with:3220-Ejector Header

5.20±0.15
[.205±0.006]
 4.20±0.15
[.165±0.006]
 1.40±0.05
[.055±0.002]

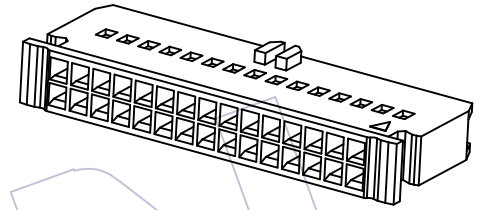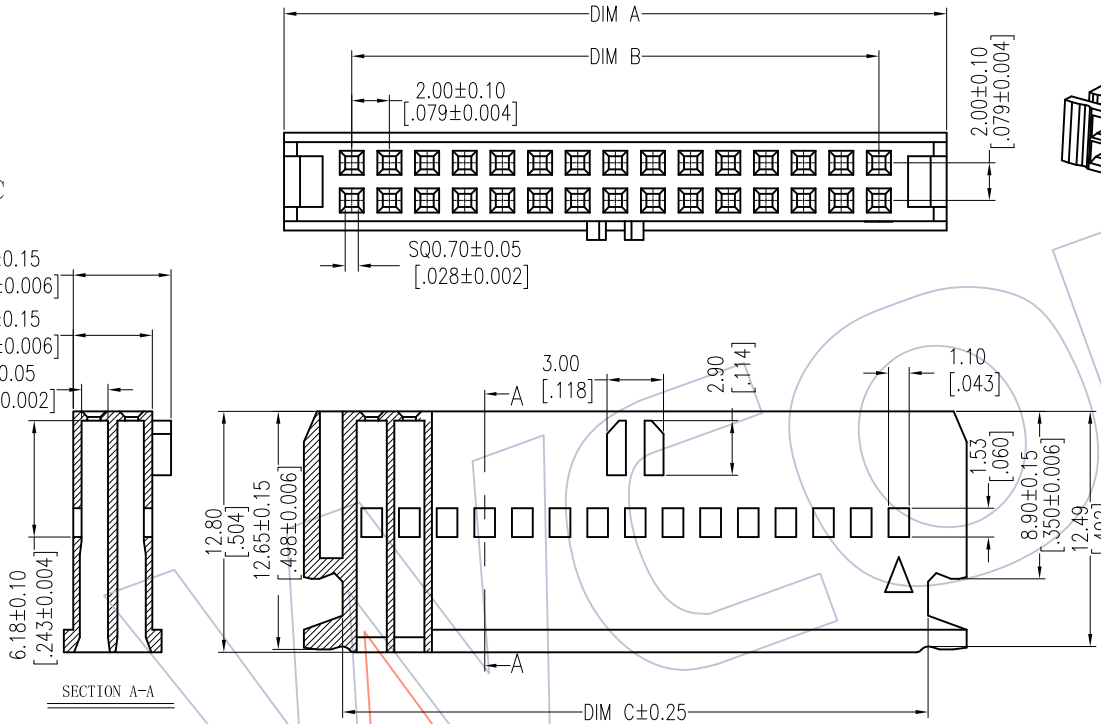


Ordering Information

3220 - H XX B 0 1

No. of Pins Colour Packing
 06~60P B= Black 0= PE Bag

61.10	58.00±0.30	65.20±0.35	60
51.10	48.00±0.25	55.20±0.30	50
45.10	42.00±0.25	49.20±0.30	44
41.10	38.00±0.25	45.20±0.30	40
35.10	32.00±0.25	39.20±0.30	34
31.10	28.00±0.20	35.20±0.25	30
27.10	24.00±0.20	31.20±0.25	26
25.10	22.00±0.20	29.20±0.25	24
21.10	18.00±0.20	25.20±0.25	20
17.10	14.00±0.18	21.20±0.20	16
15.10	12.00±0.18	19.20±0.20	14
11.10	8.00±0.15	15.20±0.20	10
9.10	6.00±0.15	13.20±0.20	08
7.10	4.00±0.15	11.20±0.20	06
DIM C	DIM B	DIM A	PIN数

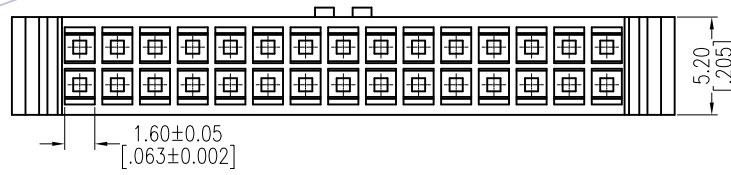

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X ±0.40	Ding	2017/02/10	UNIT	mm	3220-HXXB01
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	2.0mm HOUSING H=12.8
Angle ± 3'	DIM	TOL	PROJ.		Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

AO	2017/02/10	NEW							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						