

HSF


NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni

Ordering Information

3220-TPXX01

Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

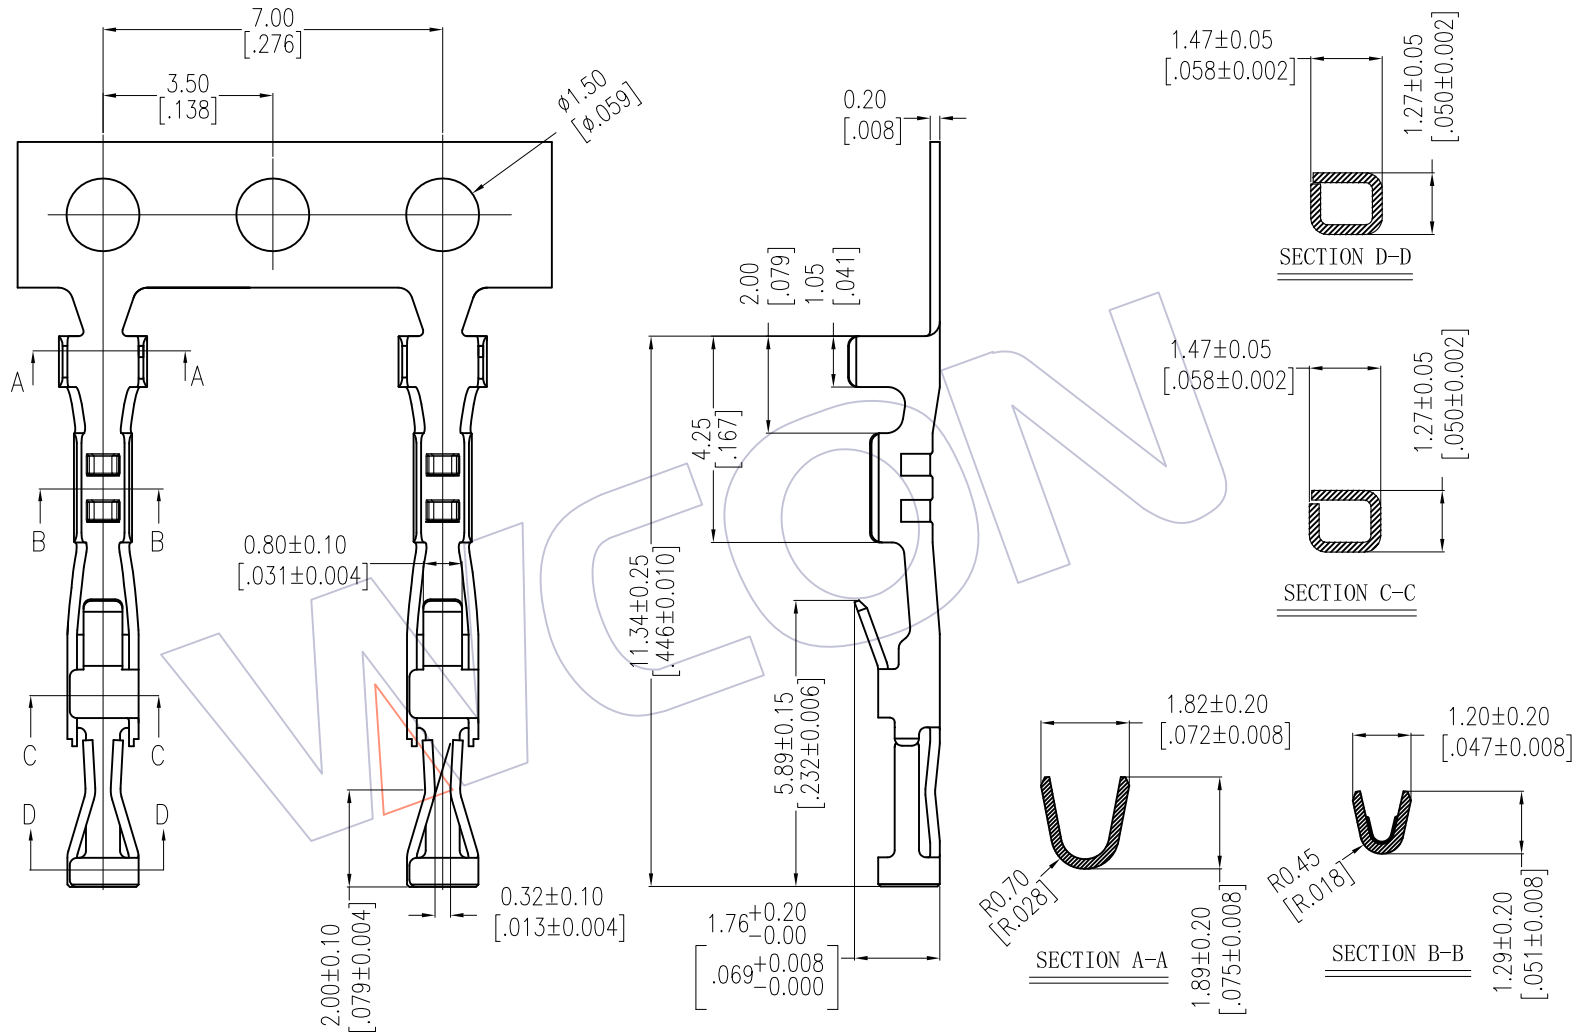

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON	
				X.X	±0.40							Http: www.wcon.com	
A0	2016/09/22	NEW		X.XX	±0.25	DingWenMin	2016/09/22	UNIT	mm inch	3220-TPXX01	2.0mm Ejector Contact	WCON-Dongguan	WCON-Kunshan
				X.XXX	±0.15	CHECK	DATE	SIZE	A4			Tel: +86 769 85358920	Tel: +86 512 57468408
				Angle	± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.		Fax: +86 769 85358915	Fax: +86 512 57468468
				DIM	TOL			PROJ.				E-mail: sales@wcon.com	E-mail: salesks@wcon.com