
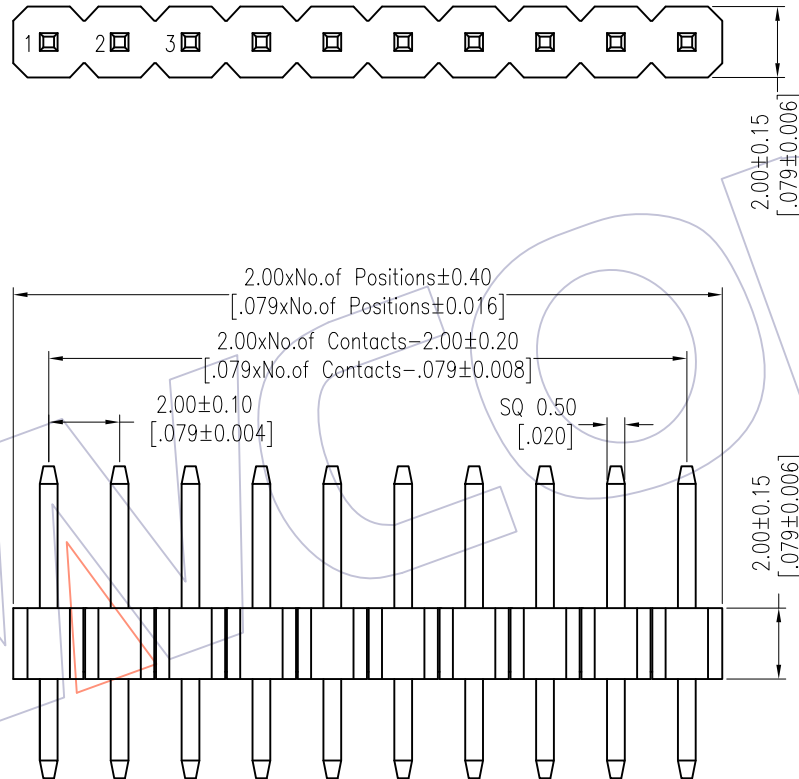


# HSF

NOTES:  
 Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

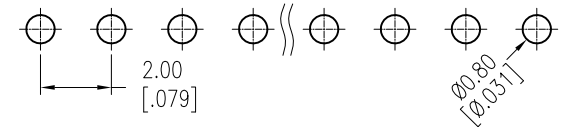


## Ordering Information

1220-11 XX XX S XXX C 0 XX

No.of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
02-40	G0=Gold Flash	L=A+B+2.0	Material	0=PE Bag	01-99
	G3=10u"Gold	Standard:068=6.8	C=PA9T	T=Tube	
	G4=15u"Gold	078=7.8			
	G5=30u"Gold	088=8.8			
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

Item	Pin Length	A	B	Mating
Standard	6.80	2.80	2.00	2220T 2221 2227T 2228
	7.80	2.80	3.00	2235
	8.80	2.80	4.00	2240 2243 2263 2272
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X ±0.40	Liu	2018.01.18	UNIT	mm	1220-11XXXXXXC0XX
A1	2018/01/18	Modify P/N	△	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/04/26	NEW	----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.0 SINGLE ROW 180°H=2.0
				Angle ± 3'			PROJ.	☉	Customer NO.
				DIM TOL					



# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--