



HSF

NOTES:

Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

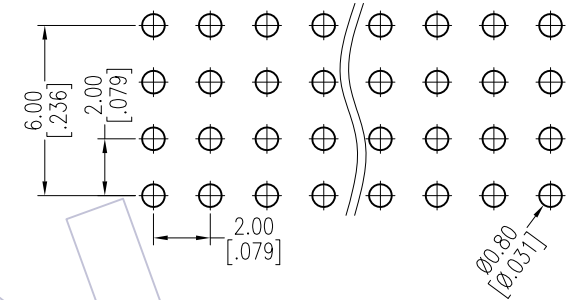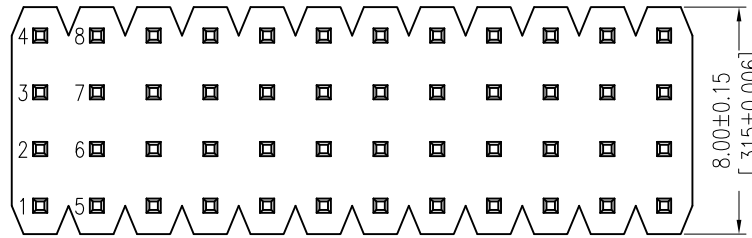

Ordering Information

1215-14 XX XX R XXX C 0 XX Δ

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:04-50	G0=Gold Flash	L=A+B+D+2.5	Material	0=PE Bag	01-99
	G3=10u"Gold	Standard:100=10.0	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

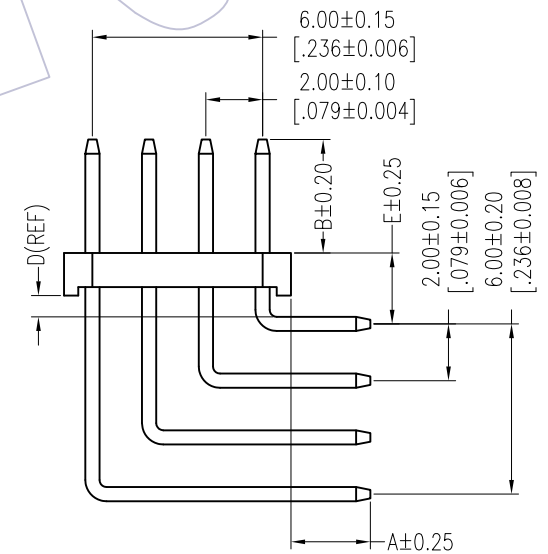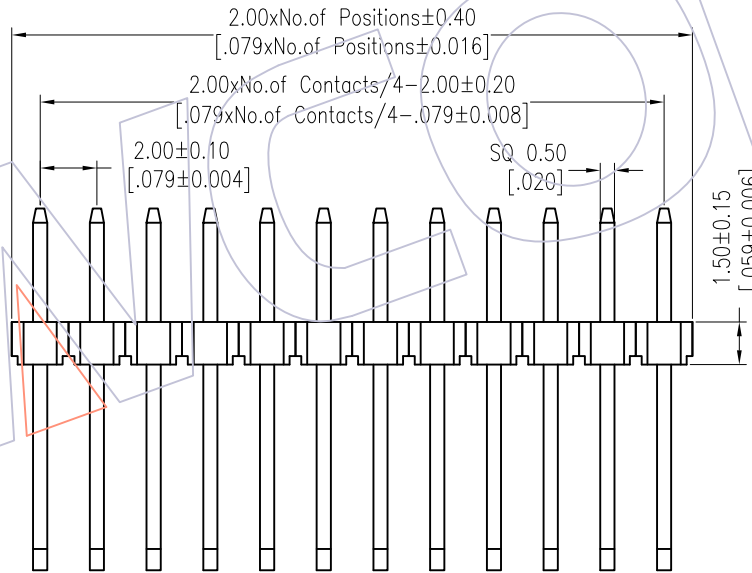

Item	Pin Length	A	E	B	Mating
Standard	10.00	2.80	2.50	4.00	2263
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X	±0.40	2018.01.18	UNIT	mm	1215-14XXXXRXXXCOXX Δ
A1	2018/01/18	Modify P/N	Δ	x.XX	±0.25	DATE	SIZE	A4	TITLE:
AO	2012/04/18	NEW	-----	x.XXX	±0.15	DATE	SHEET	1/1	PH2.00 FOUR ROW 90° H=1.5 CONCAVE BENDING
				Angle	± 3'	DATE	PROJ.	ϕ	Customer NO.
				DIM	TOL				

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--