



HSF

NOTES:


Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

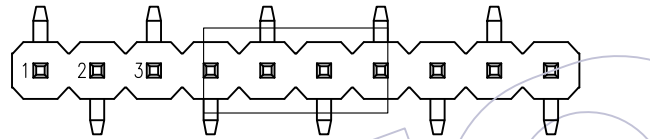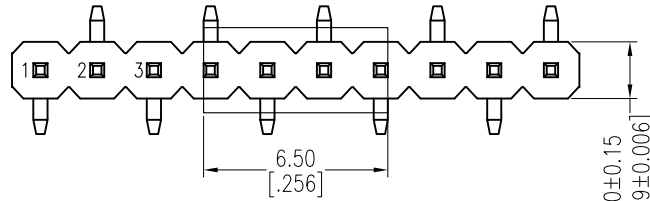

TYPE 1

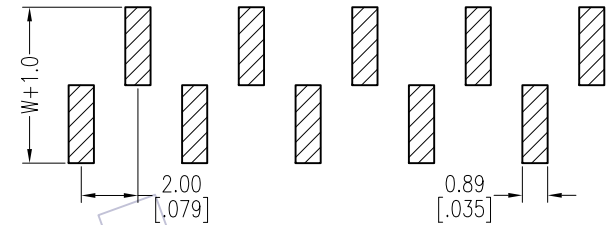



TYPE 2

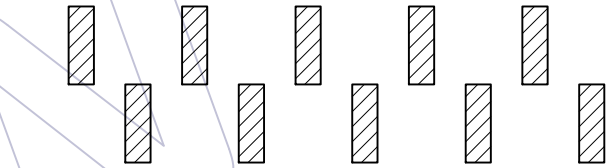

Ordering Information

1215-21 XX XX M XXX C R XX Δ

No.of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
02~50	G0=Gold Flash	L=B+C+D+ $\frac{W}{2}$	T=Tube	T=Tube	01~99
	G3=10u"Gold	Standard:	C=PA9T	P=Tube+CAP	
	G4=15u"Gold			R=Tape&Reel+CAP	
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

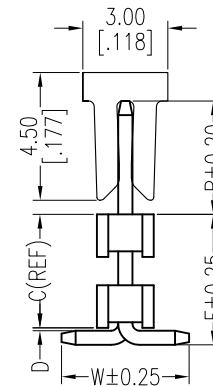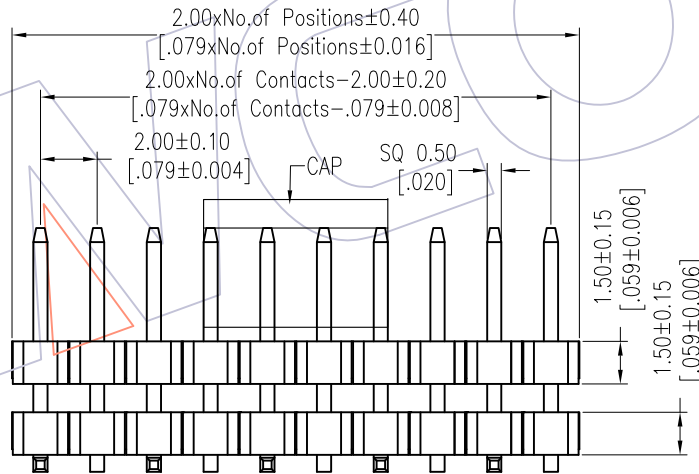

Item	Pin Length	W	D	B	E	Mating
Standard	---	4.50	0.10	4.00	---	2240 2243 2263 2272
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X ±0.40	Liu	2018.01.18	UNIT	mm	1215-21XXXXMXXXCRXX Δ
A1	2018/01/18	Modify P/N	Δ	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.00 SINGLE ROW DOUBLE PLASTIC SMT H=1.5
AO	2012/04/18	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.	ϕ	
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--