

HSF

NOTES:


Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK




Ordering Information

1215-22 XX XX R XXX C 0 XX

No.of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:02~50	G0=Gold Flash	L=A+B+C+D+1.0	Material	0=PE Bag	01~99
	G3=10u"Gold	Standard:	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

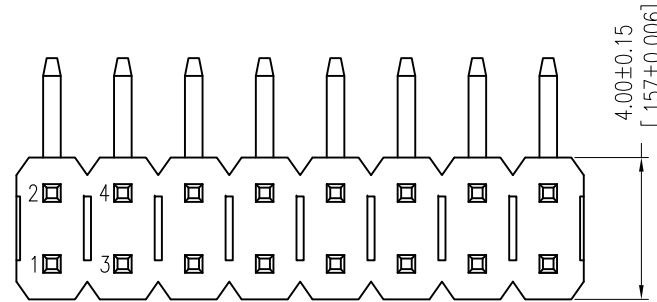

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

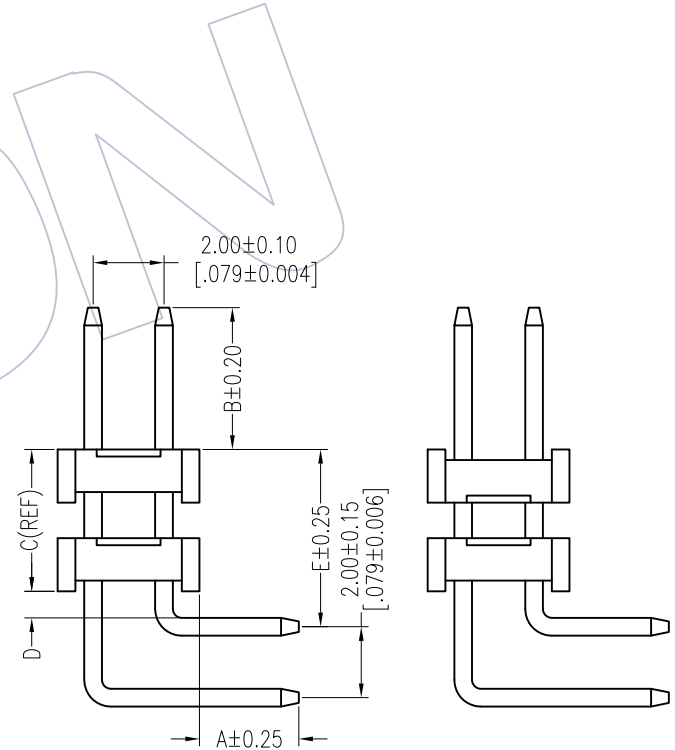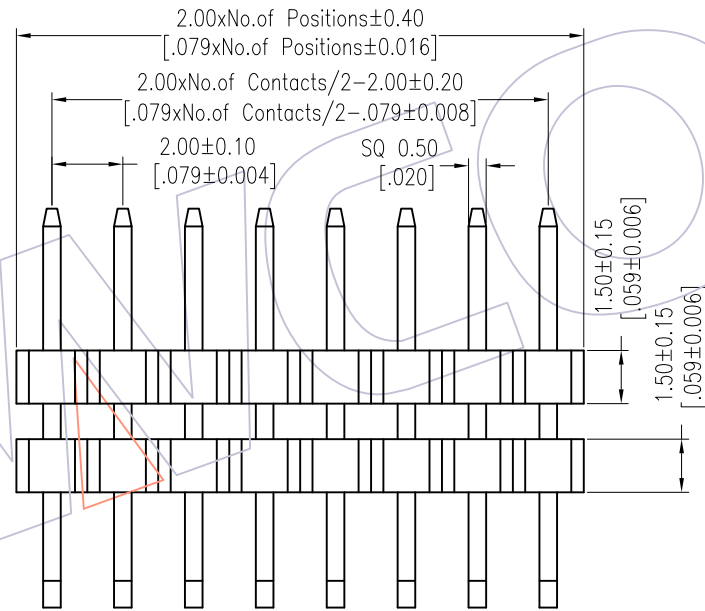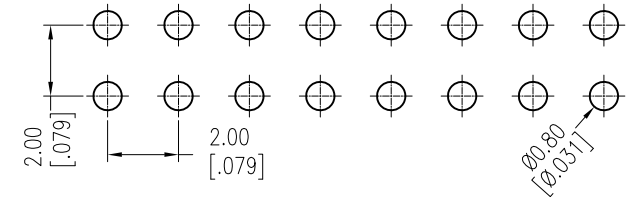

Item	Pin Length	A	D	B	E	Mating		
Standard	---	2.80	0.75	4.00	---	2240	2243	2263 2272
Alternate								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X ±0.40	<i>Liu</i>	2018.01.18	UNIT	mm	1215-22XXXXRXXXCOXX
A1	2018/01/18	Modify P/N		X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.00 DUAL ROW DOUBLE PLASTIC 90° H=1.5 CONCAVE BENDING
AO	2012/04/18	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--