





# HSF

**NOTES:**

Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

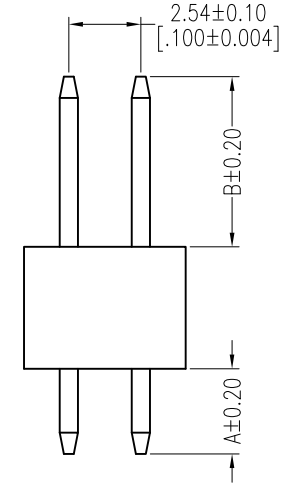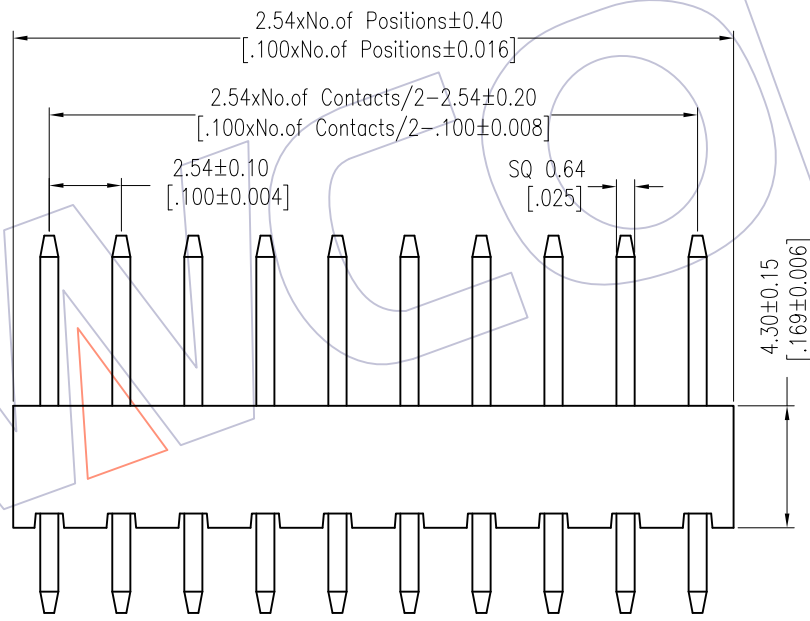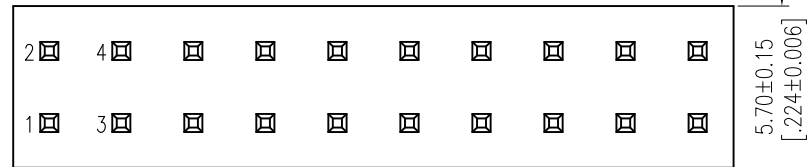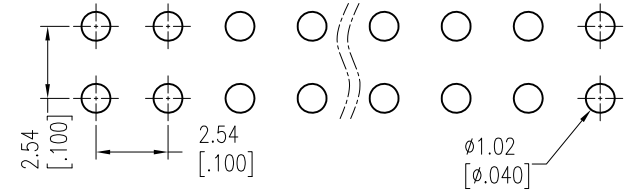

## Ordering Information

1143-12 XX XX S XXX C 0 XX  $\triangle A3$

No. of Pins Per Row:02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+4.3 Standard:133=13.3	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01-99
------------------------------	---	--	------------------------------	-------------------------------	---------------------

Item	Pin Length	A	B
Standard	13.30	3.00	6.00
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2018/01/22	Modify P/N	$\triangle A3$	x.x	±0.40	OPERATION	DRAW	2018/01/22	UNIT	mm	1143-12XXXXXXCOXX
A2	2013/03/01	Modify The Material	$\triangle A2$	x.xx	±0.25		Ruipeng	DATE	SIZE	A4	TITLE:
A1	2012/12/13	Add PBT Material	$\triangle A1$	x.xxx	±0.15		CHECK		SHEET	1/1	PH2.54 DUAL ROW 180° H=4.3
A0	2012/05/08	NEW	-----	Angle	± 3'		APPROVE	DATE	PROJ.	$\phi$	Customer NO.

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: salesks@wcon.com