

# HSF

**NOTES:**

Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C


Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

## Ordering Information




1143-12 XX XX R XXX C 0 XX  $\Delta_3$

No.of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:02~40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+5.4 Standard:144=14.4	C=PA9T	0=PE Bag T=Tube	01~99

Item	Pin Length	A	B
Standard	14.40	3.00	6.00
Alternate			

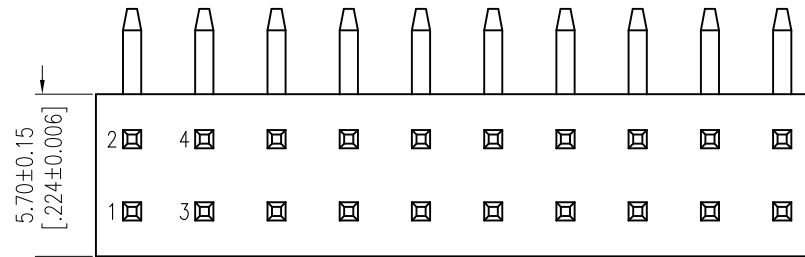

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

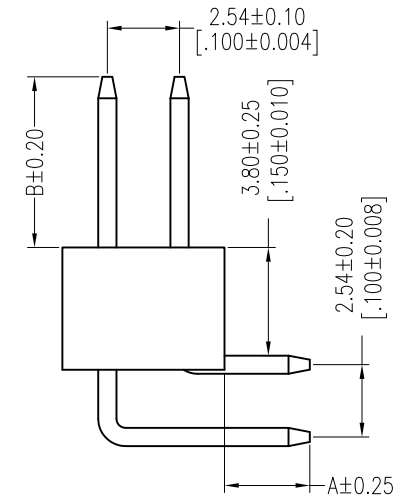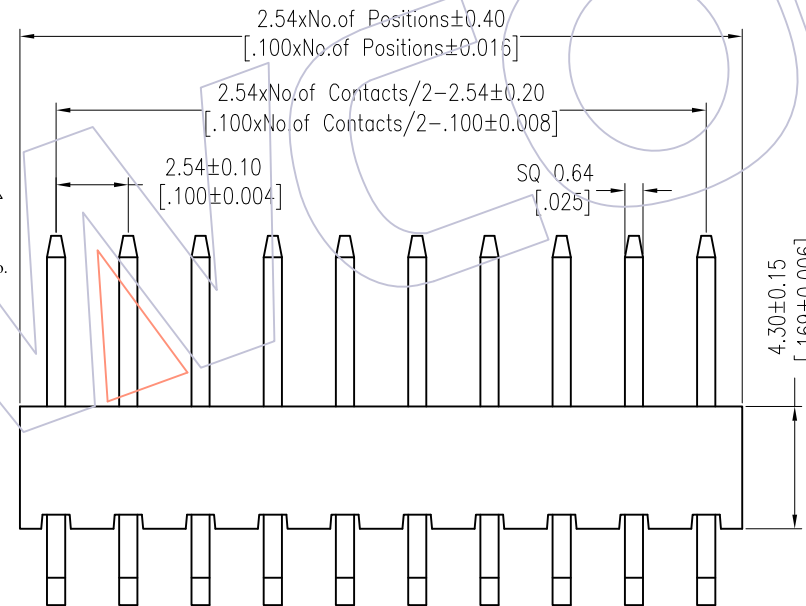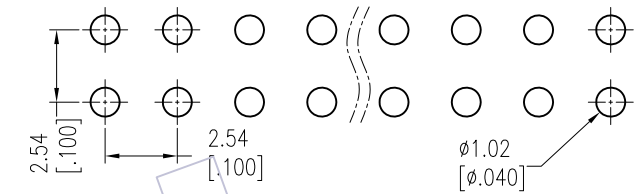

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.
A3	2018/01/22	Modify P/N	$\Delta_3$	OPERATION		DRAW	DATE	SCALE
A2	2013/03/01	Modify The Material	$\Delta_2$	x.x ±0.40		Ruipeng	2018/01/22	FIT
A1	2012/12/13	Add PBT Material	$\Delta_1$	x.xx ±0.25		CHECK	DATE	UNIT
A0	2012/05/08	NEW	-----	x.xxx ±0.15		APPROVE	DATE	SIZE
				Angle ± 3'				A4
								SHEET
								1/1
								PROJ.

PART NO.	1143-12XXXXRXXXC0XX
TITLE:	PH2.54 DUAL ROW 90° H=4.3
Customer NO.	

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--