

HSF

NOTES:

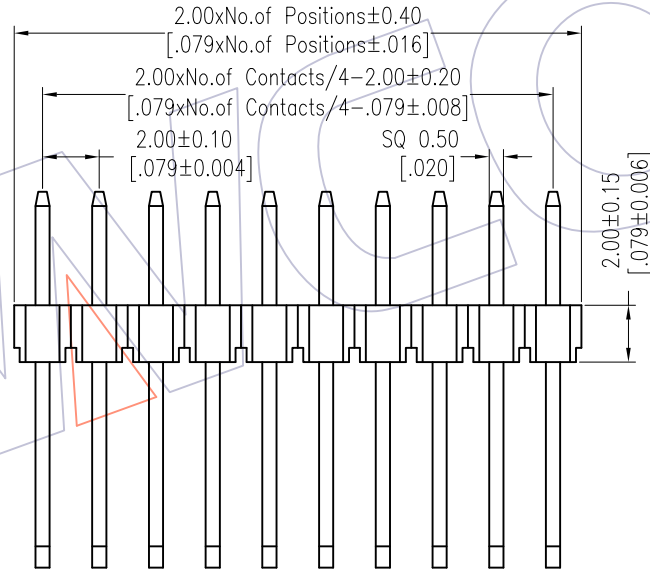
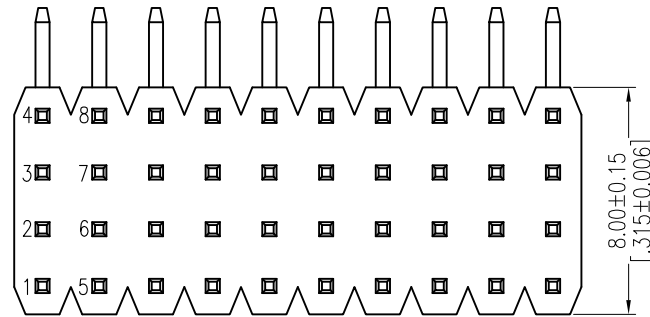
Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Ordering Information

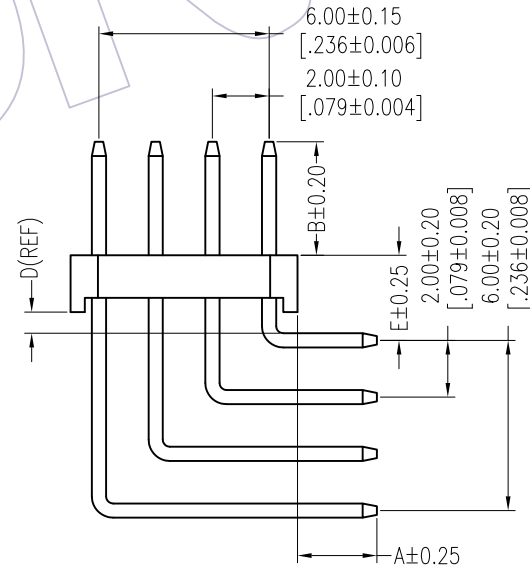
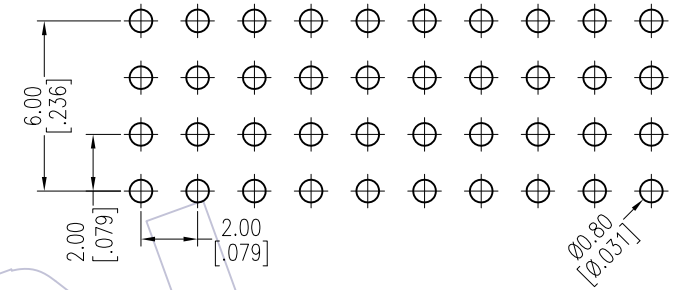
1220-14 XX XX R XXX C 0 XX 

| | | | | | |
|-----------------------------|---|---|---------------------------------|-------------------------------|---------------------|
| No.of Pins Per Row:04-40 | Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin | Pin Length(Short) L=A+B+D+3.0 Standard:105=10.5 | Insulator Material C=PA9T | Packing O=PE Bag T=Tube | Series No. 01-99 |
|-----------------------------|---|---|---------------------------------|-------------------------------|---------------------|






Recommended P.C.B Layout (Top Side)

(PCB BOARD TOLERANCE±0.05)



| Item | Pin Length | A | E | B | Mating |
|-----------|------------|------|------|------|--------|
| Standard | 10.50 | 2.80 | 3.00 | 4.00 | 2263 |
| Alternate | | | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
|-----|------------|--------------------------|---|-------------|---------|------------|-------|---|---|
| | | | | x.X ±0.40 | Liu | 2018.01.19 | UNIT | mm | 1220-14XXXXRXXXCOXX  |
| A1 | 2018/01/19 | Modify P/N |  | x.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: PH2.00 FOUR ROW 90°H=2.0 CONCAVE BENDING |
| AO | 2012/04/26 | NEW | ----- | x.XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 | Customer NO. |
| | | | | Angle ± 3' | | | PROJ. |  | |
| | | | | DIM TOL | | | | | |



Http: www.wcon.com

| | |
|---|--|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com |
|---|--|