
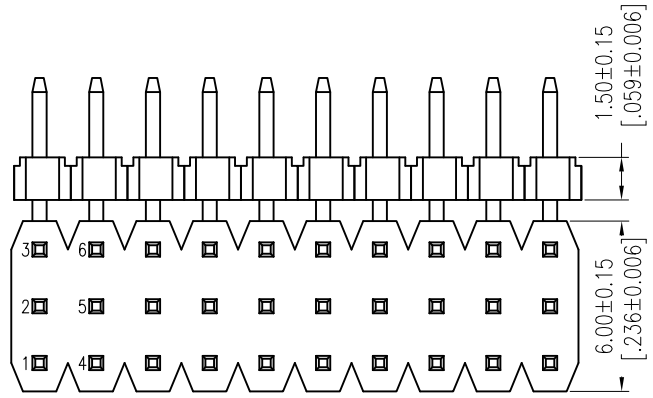


HSF

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

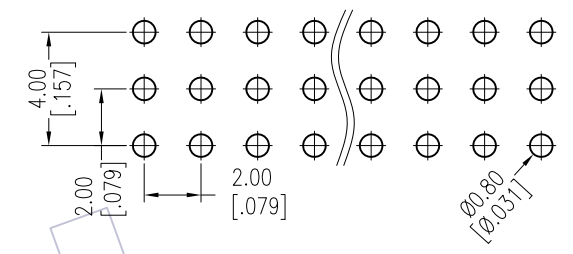

Ordering Information

1215-23 XX XX R XXX C 0 XX

- No. of Pins Per Row: 03~50
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
- Pin Length(Short) L=A+B+D1+D2+3.2
- Standard:
- Packing: 0=PE Bag, T=Tube
- Series No. 01~99
- Insulator Material C=PA9T

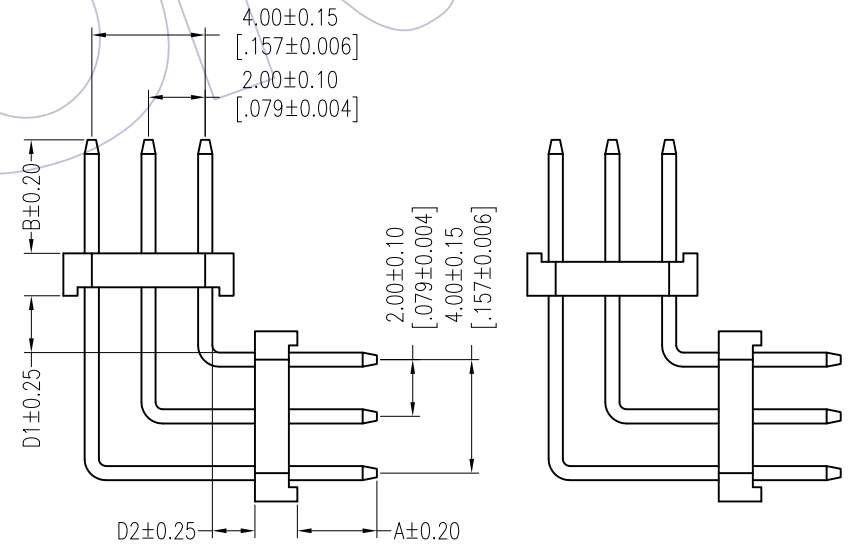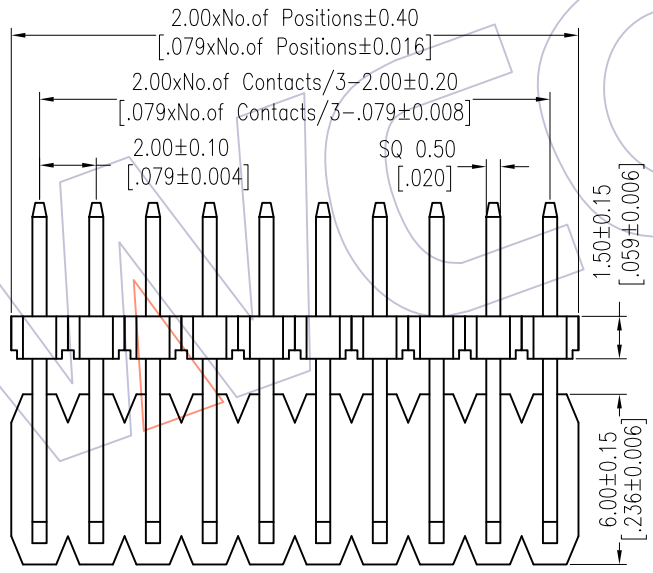

Item	Pin Length	A	D1	B	D2	Mating
Standard	---	2.80	---	4.00	---	2263
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/18	Modify P/N	△	x.X ±0.40	Liu	2018.01.18	UNIT mm		1215-23XXXXRXXXC0XX △
AO	2012/04/18	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 THREE ROW DOUBLE PLASTIC 90° H=1.5 MIDDLE BENDING
				x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--