

# HSF

NOTES:  
 Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C





Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

## Ordering Information

1220-22 XX XX R XXX C 0 XX

No.of Pins Per Row:02~40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A+B+C+D+1.0 Standard:	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01~99
-----------------------------	---	---	------------------------------	-------------------------------	---------------------

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

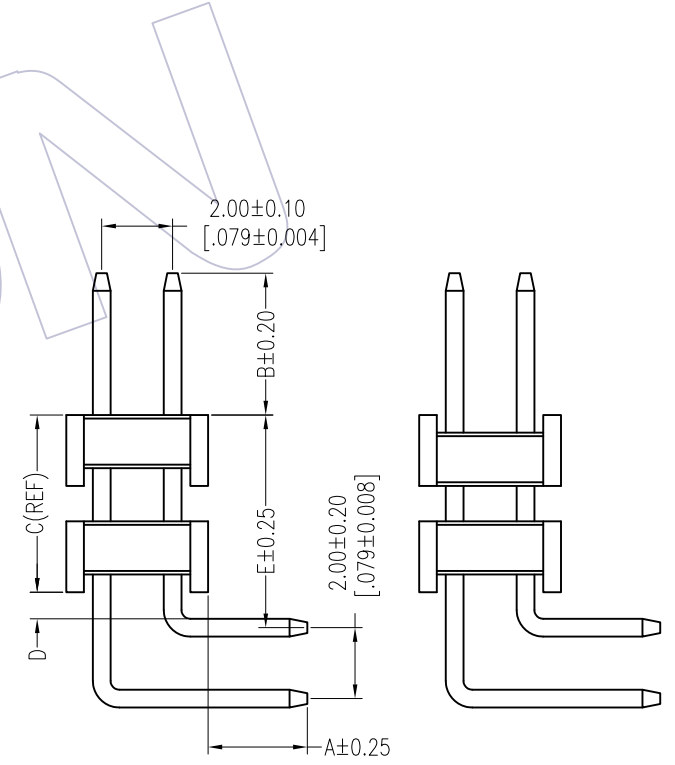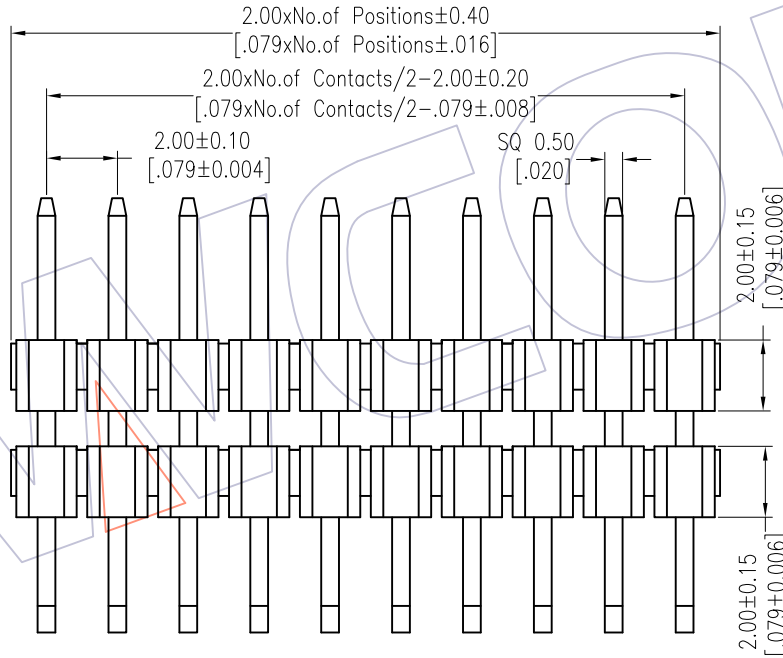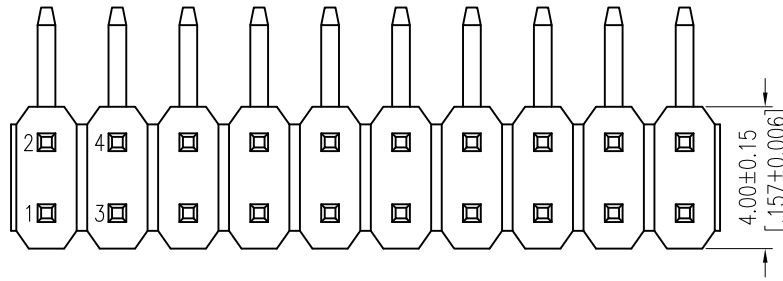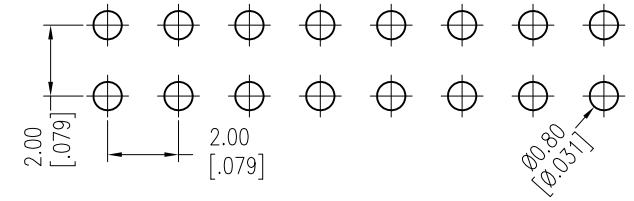

TYPE 1

TYPE 2

Item	Pin Length	A	D	B	E	Mating		
Standard	---	2.80	0.75	4.00	---	2240	2243	2263 2272
Alternate								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/19	Modify P/N		x.X ±0.40	Liu	2018.01.19	UNIT mm		1220-22XXXXRXXXC0XX
AO	2012/04/26	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 DUAL ROW DOUBLE PLASTIC 90°H=2.0 CONCAVE BENDING
				x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--