
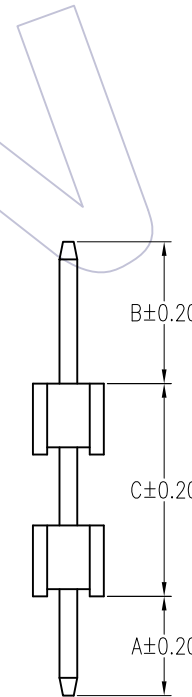
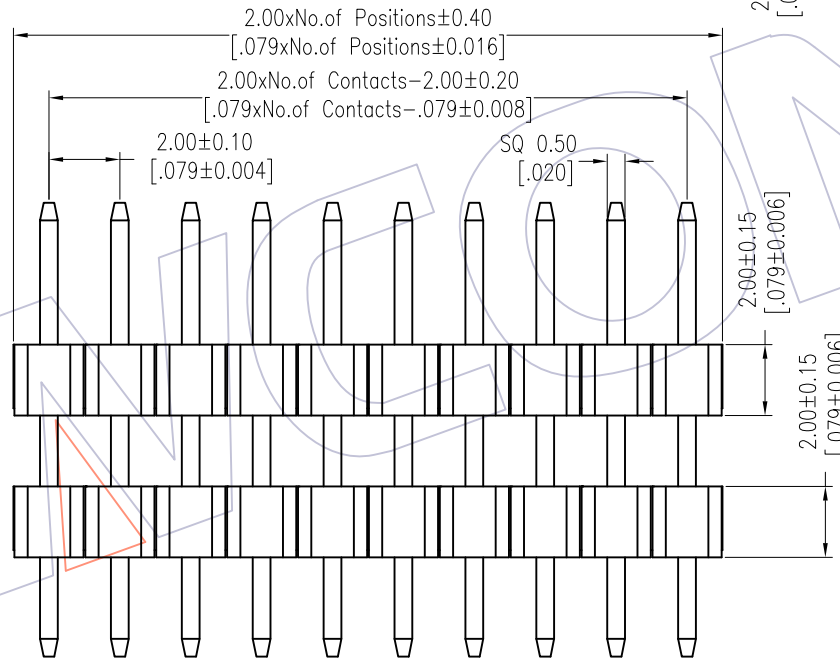
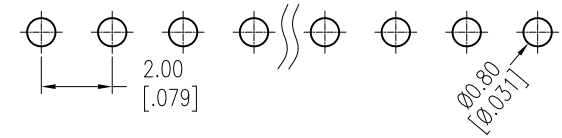


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Ordering Information

1220-21 XX XX S XXX C 0 XX

No. of Pins 02-40
 Contact Plating G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
 Pin Length L=A+B+C
 Insulator Material C=PA9T
 Packing 0=PE Bag, T=Tube
 Series No. 01-99

Item	Pin Length	A	B	C	Mating
Standard	----	2.80	2.80	----	
	----	2.80	4.00	----	2240 2243 2263 2272
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/19	Modify P/N	△	x.X ±0.40	Liu	2018.01.19	UNIT mm		1220-21XXXXXXXC0XX △
AO	2012/04/26	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 SINGLE ROW DOUBLE PLASTIC 180° H=2.0
				x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ. ⌀		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com