



HSF

NOTES:

Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

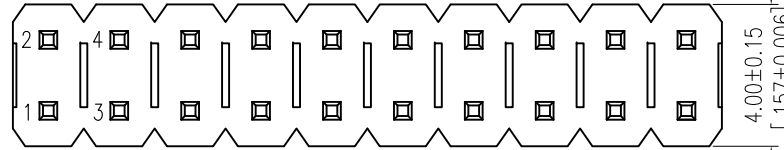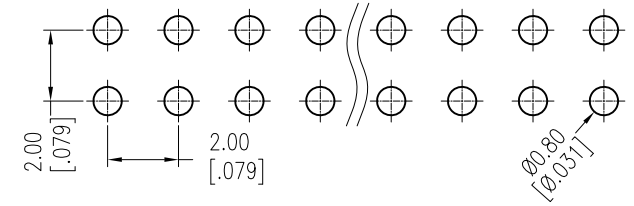

Ordering Information

1215-12 XX G0 S XXX C 0 XX

No.of Pins Per Row:02-50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin Plated SM=Matte Tin	Pin Length L=A+B+1.5 Standard:063=6.3 073=7.3 083=8.3	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01-99
-----------------------------	--	---	---------------------------------	-------------------------------	---------------------

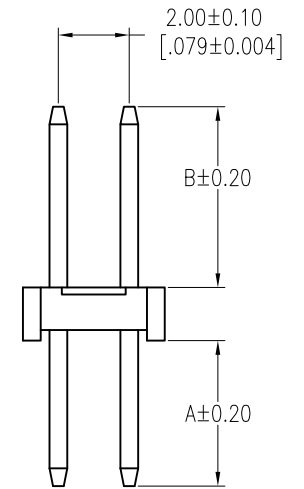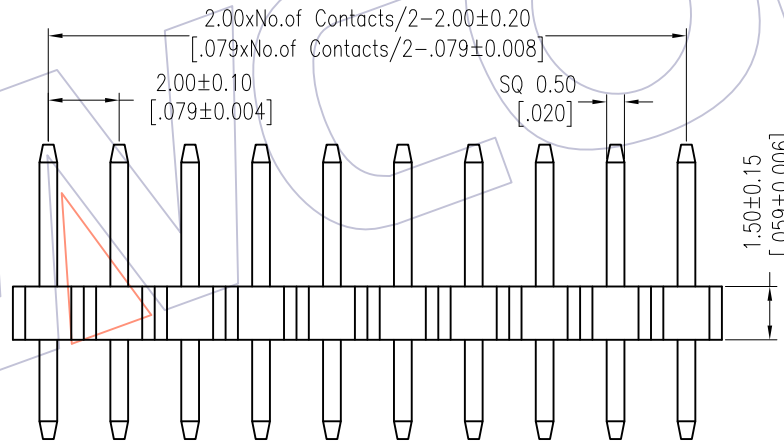

Item	Pin Length	A	B	Mating
Standard	6.30	2.80	2.00	2220T 2221 2227T 2228
	7.30	2.80	3.00	2235
	8.30	2.80	4.00	2240 2243 2263 2272
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.X ±0.40	<i>Lu</i>	2018.01.18	UNIT	mm	1215-12XXXXXXC0XX
x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.00 DUAL ROW 180° H=1.5
x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/18	Modify P/N	
A0	2012/04/18	NEW	-----