


# HSF


**NOTES:**

Rated Current:1.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

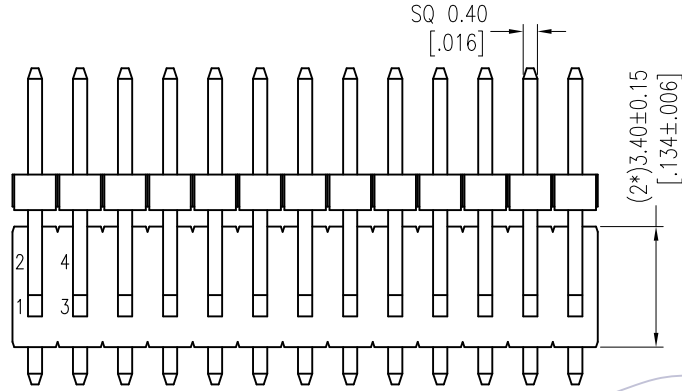



**Recommended P.C.B Layout (Top Side)**  
 (PCB BOARD TOLERANCE±0.05)

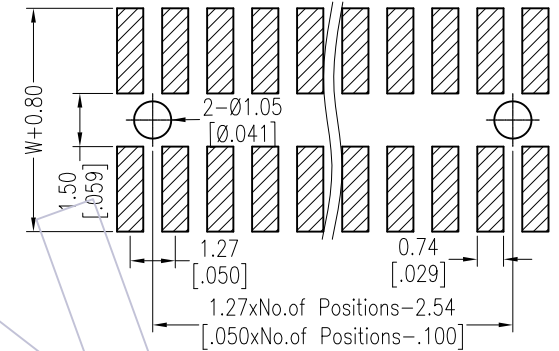

## Ordering Information

1310-22 XX XX D XXX C A XX

No. of Pins Per Row:02-50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=B1+E-2.1+ <sup>W±.27</sup>	Insulator C=PA9T	Series No. 01-99	Packing A=Tray
------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------	---------------------	---------------------	-------------------

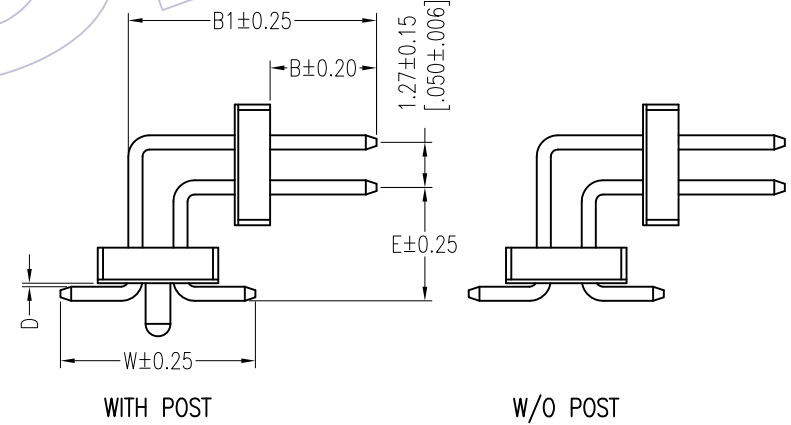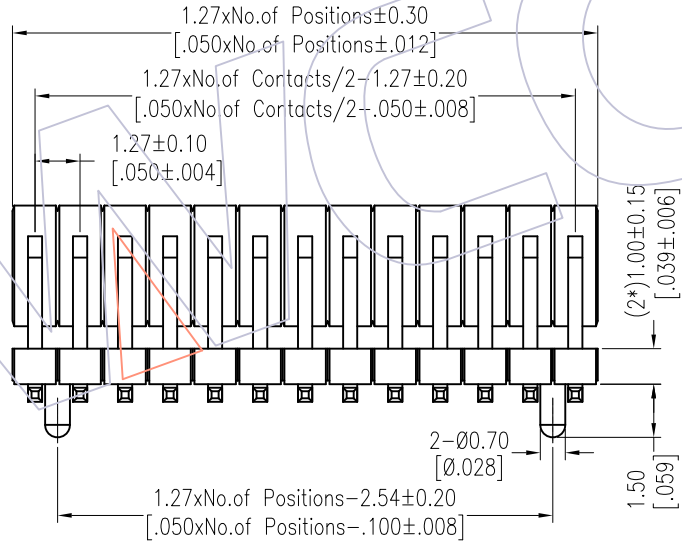

Item	Pin Length	W	D	E	B	B1	Mating
Standard	--	5.50	0.10	--	3.00	--	2334
	--	5.50	0.10	--	4.00	--	2344
Alternate							

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/12	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/12	UNIT	mm [inch]	1310-22XXXXXXCXXX
AO	2012/03/13	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, R/A&SMT, DOUBLE PLASTIC, H=1.0
				Angle ± 3'			PROJ.	Customer NO.	
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
-------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------