



HSF

NOTES:

Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

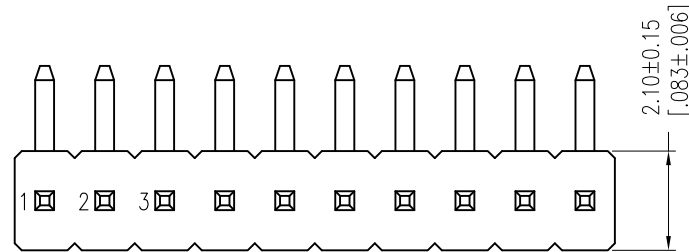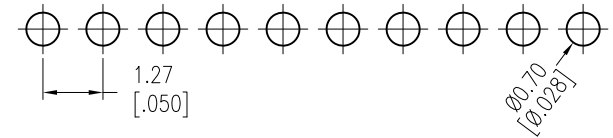

Ordering Information

1310-11 XX XX R XXX C A XX

No.of Pins	Contact Plating	Pin Length	Insulator Packing	Series No.
01-50	G0=Gold Flash	L=A+B+D+2.0	C=PA9T A=Tray	01-99
	G3=10u"Gold	Std:067=6.7		
	G4=15u"Gold	078=7.8		
	G5=30u"Gold	088=8.8		
	S0=Gold Flash/Tin			
	S3=10u"Gold/Tin			
	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			
	SN=Tin			
	SM=Matte Tin			

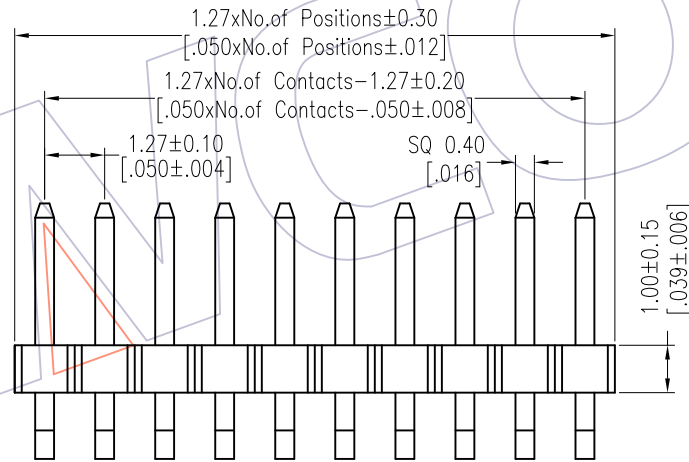

Item	Pin Length	A	E	B	Mating
Standard	6.7	1.80	2.20	1.90	2321
	7.8	1.80	2.20	3.00	2334
	8.8	1.80	2.20	4.00	2344
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/12	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/12	UNIT	mm [inch]	1310-11XXXXRXXCXXX
AO	2012/03/12	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, SINGLE ROW, R/A, H=1.0
				Angle ± 3'			PROJ.	⊕	Customer NO.
				DIM TOL					



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--