




HSF

NOTES:

Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK




Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

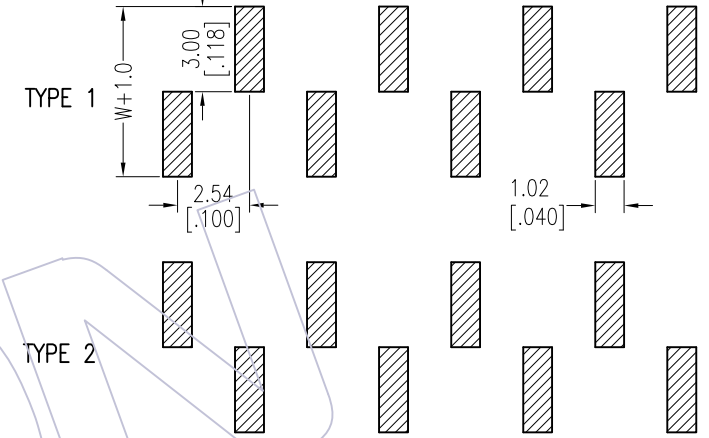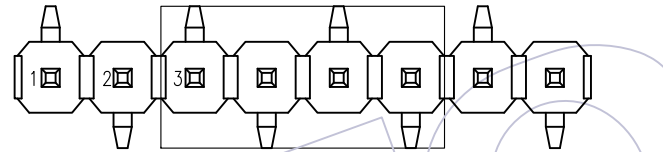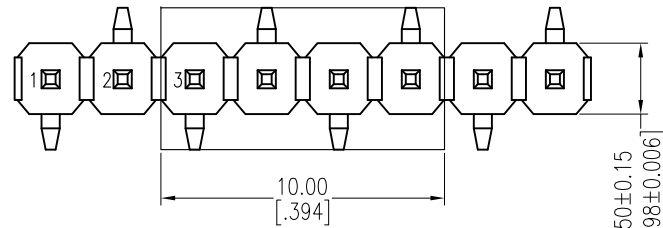

Ordering Information

1115-11 XX XX M XXX C R XX

- No. of Pins: 02-40
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
- Pin Length: L=B+D+1.5+ $\frac{W}{2}$, Standard:106=10.6
- Insulator Material: C=PA9T
- Packing: T=Tube, P=Tube+CAP, R=Tape & Reel+CAP
- Series No.: 01-99

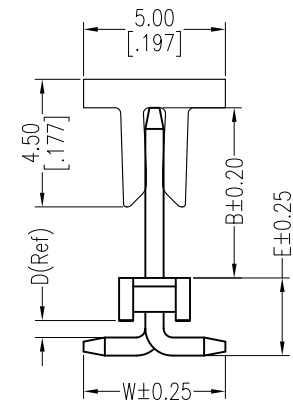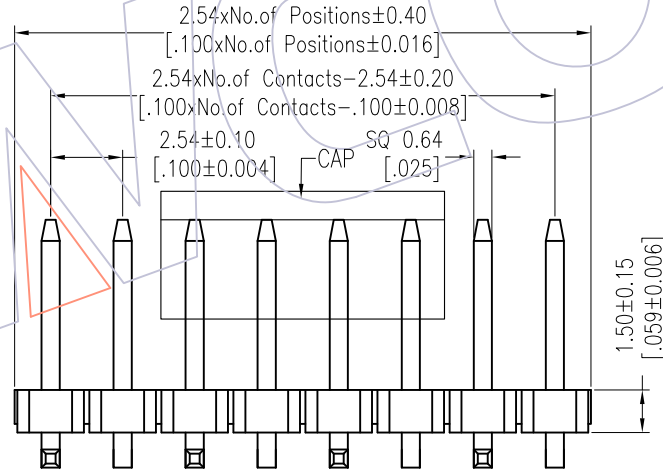

Item	Pin Length	W	E	B	Mating
Standard	10.60	5.00	2.74	6.00	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X ±0.40	Ruipeng	2018/01/22	UNIT	mm	1115-11XXXXMXXXCRXX
A1	2018/01/22	Modify P/N		x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/05/02	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 SINGLE ROW SMT H=1.5
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com